




Automation for a Changing World

# Delta Vector Control Drive C2000 Series

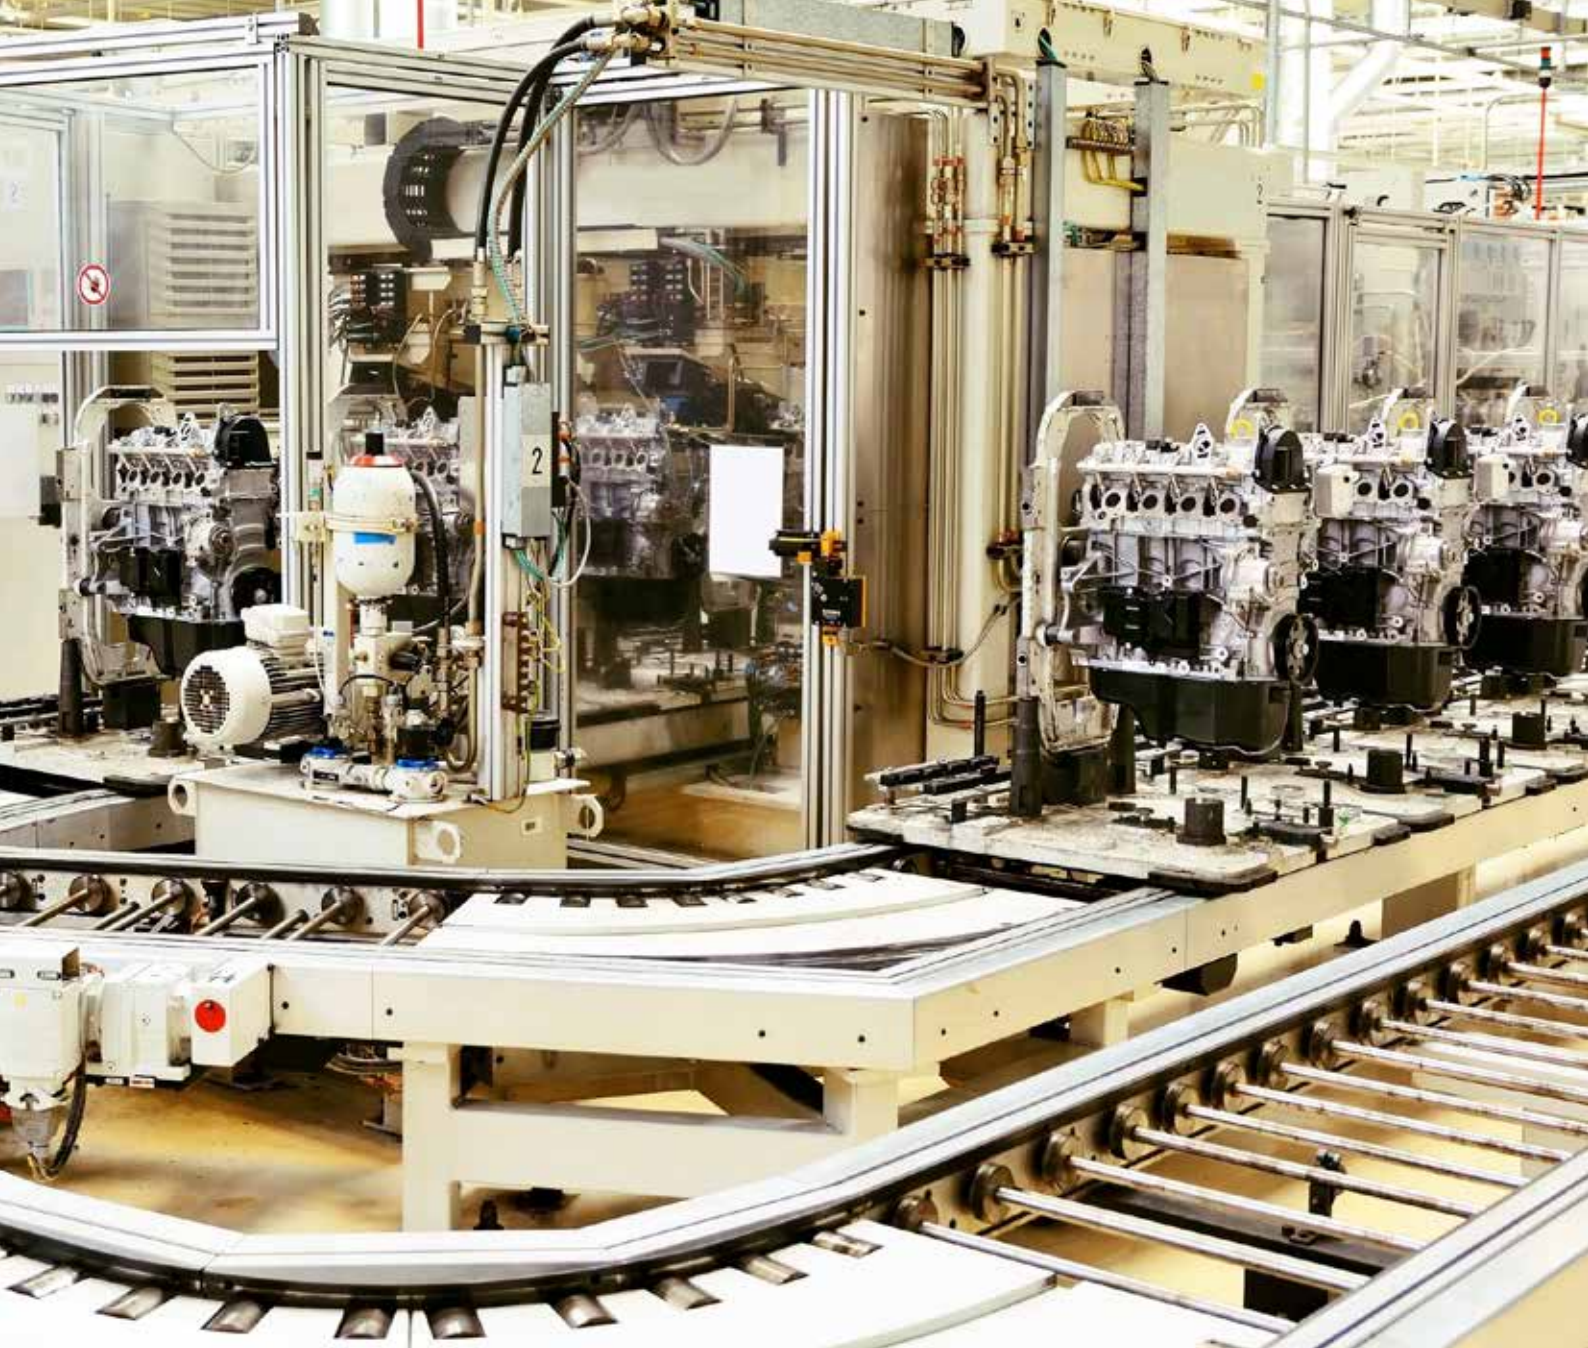

**ARCO CONTROL**


☎ :051-37133855-6  
💬 :09014284236  
[www.arcokala.com](http://www.arcokala.com)



reddot design award  
winner 2010

[www.arcokala.com](http://www.arcokala.com)

 **DELTA**  
Smarter. Greener. Together.

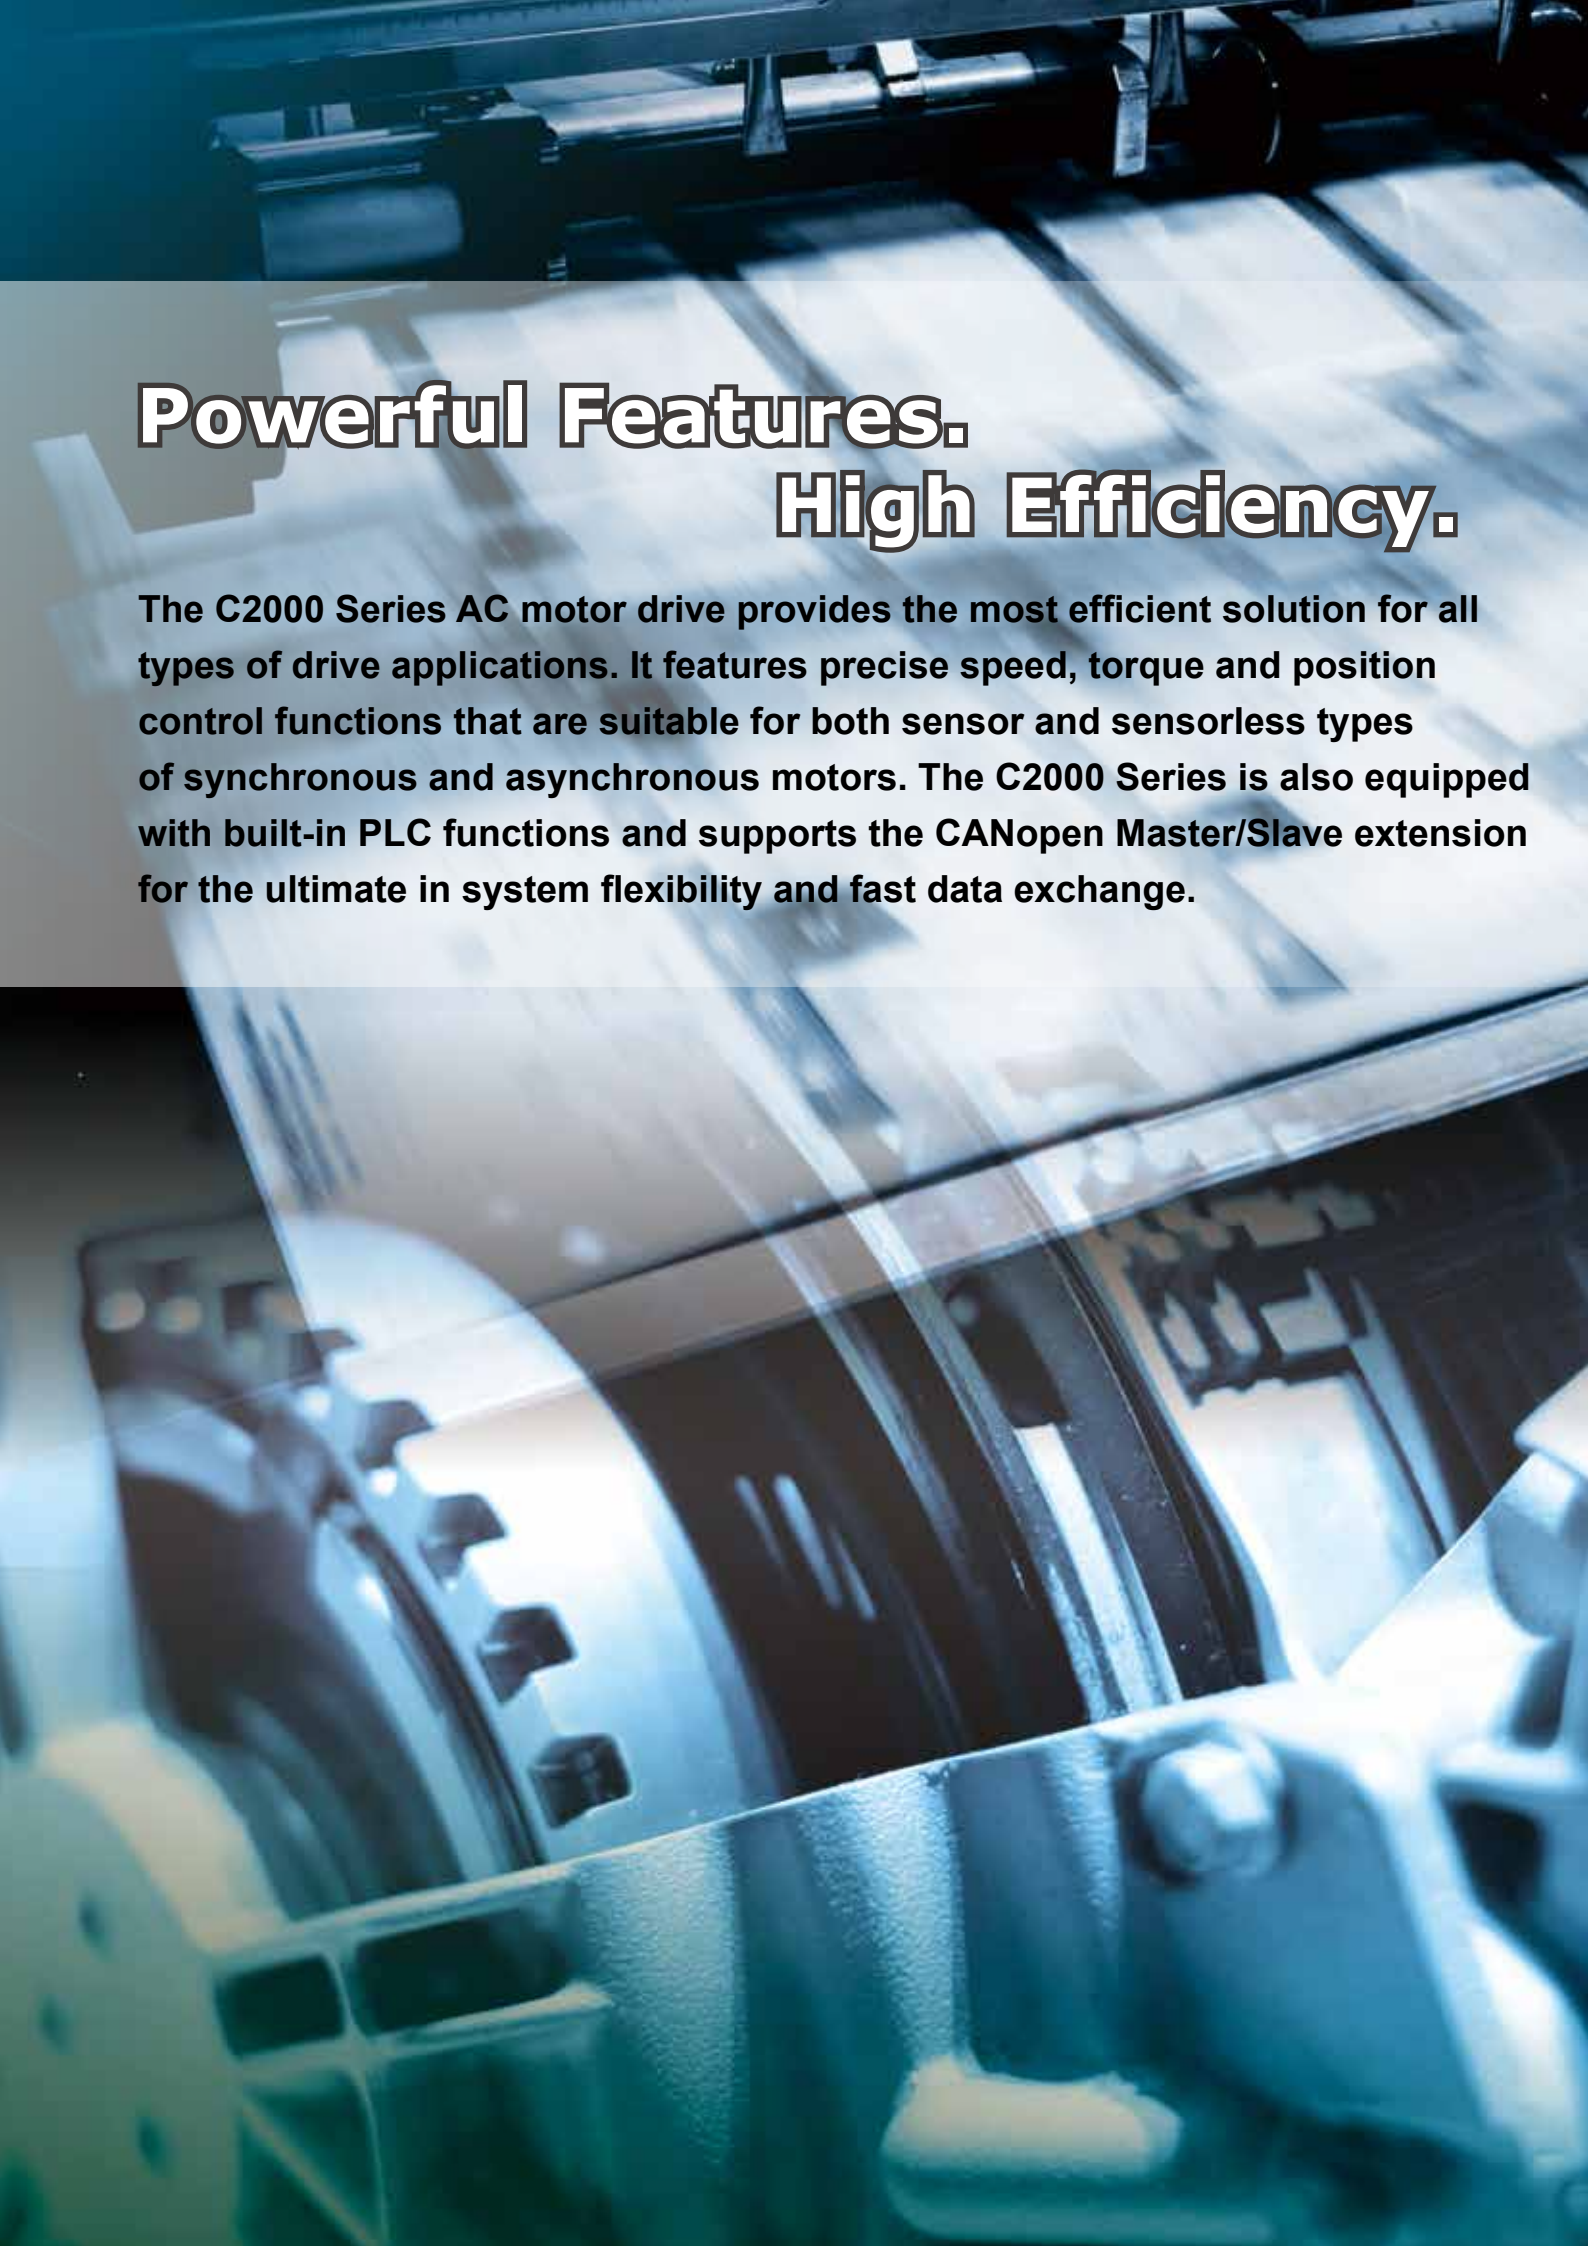The background of the entire page is a high-contrast, blue-tinted photograph of industrial machinery. It shows various mechanical components, including what appears to be a large gear or flywheel on the left, and various structural frames and shafts. The lighting is dramatic, with strong highlights and deep shadows, giving it a technical and industrial feel.

# **Powerful Features. High Efficiency.**

The C2000 Series AC motor drive provides the most efficient solution for all types of drive applications. It features precise speed, torque and position control functions that are suitable for both sensor and sensorless types of synchronous and asynchronous motors. The C2000 Series is also equipped with built-in PLC functions and supports the CANopen Master/Slave extension for the ultimate in system flexibility and fast data exchange.

## Table of Contents

|                                                                                                                                                                                                                                                                                                                                                             |           |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------|
| <b>Standard Models</b>                                                                                                                                                                                                                                                                                                                                      | <b>3</b>  |
| <b>Advanced Drive Controls</b>                                                                                                                                                                                                                                                                                                                              | <b>3</b>  |
| <b>Modular Design</b>                                                                                                                                                                                                                                                                                                                                       | <b>5</b>  |
| <b>Certifications</b>                                                                                                                                                                                                                                                                                                                                       | <b>6</b>  |
| <b>LCD Keypad</b>                                                                                                                                                                                                                                                                                                                                           | <b>7</b>  |
| <b>Features and Applications</b>                                                                                                                                                                                                                                                                                                                            | <b>8</b>  |
| <ul style="list-style-type: none"> <li>High-speed networks</li> <li>Convenient operation platform</li> <li>High performance field oriented control</li> <li>Fast response to impact load</li> <li>Auto energy saving operation</li> <li>DEB function</li> <li>Permanent magnet motors (SPM, IPM)</li> <li>REG2000 Series</li> <li>AFE2000 Series</li> </ul> |           |
| <b>Active Front End<br/>AFE2000 Series</b>                                                                                                                                                                                                                                                                                                                  | <b>11</b> |
| <b>Operation Temperature and<br/>Protection Level</b>                                                                                                                                                                                                                                                                                                       | <b>12</b> |
| <b>Environment for Operation,<br/>Storage and Transportation</b>                                                                                                                                                                                                                                                                                            | <b>13</b> |
| <b>Specifications</b>                                                                                                                                                                                                                                                                                                                                       | <b>13</b> |
| <ul style="list-style-type: none"> <li>Wiring</li> <li>Dimensions</li> <li>Option cards</li> <li>Ordering information</li> </ul>                                                                                                                                                                                                                            |           |

## Standard Models (IP20/NEMA1)

Power range : 230V 0.75 ~ 90kW

|            |      |     |     |     |     |     |    |    |      |    |    |    |    |    |     |     |
|------------|------|-----|-----|-----|-----|-----|----|----|------|----|----|----|----|----|-----|-----|
| 230 V (kW) | 0.75 | 1.5 | 2.2 | 3.7 | 5.5 | 7.5 | 11 | 15 | 18.5 | 22 | 30 | 37 | 45 | 55 | 75  | 90  |
| 230 V (HP) | 1    | 2   | 3   | 5   | 7.5 | 10  | 15 | 20 | 25   | 30 | 40 | 50 | 60 | 75 | 100 | 125 |
| Frame Size | A    |     |     |     | B   |     |    | C  |      |    | D  |    | E  |    |     | F   |

Power range : 460V 0.75 ~ 450kW

|            |      |     |     |     |     |     |     |    |    |      |    |    |    |    |    |     |
|------------|------|-----|-----|-----|-----|-----|-----|----|----|------|----|----|----|----|----|-----|
| 460 V (kW) | 0.75 | 1.5 | 2.2 | 3.7 | 4.0 | 5.5 | 7.5 | 11 | 15 | 18.5 | 22 | 30 | 37 | 45 | 55 | 75  |
| 460 V (HP) | 1    | 2   | 3   | 5   | 5   | 7.5 | 10  | 15 | 20 | 25   | 30 | 40 | 50 | 60 | 75 | 100 |
| Frame Size | A    |     |     |     |     |     | B   |    |    | C    |    |    | D0 |    | D  |     |

Power range: 575V 1.5~15kW

|            |     |     |     |     |     |    |    |
|------------|-----|-----|-----|-----|-----|----|----|
| 575 V (kW) | 1.5 | 2.2 | 3.7 | 5.5 | 7.5 | 11 | 15 |
| 575 V (HP) | 2   | 3   | 5   | 7.5 | 10  | 15 | 20 |
| Frame Size | A   |     |     | B   |     |    |    |

Power range: 690V 18.5~630kW

|            |      |    |    |    |    |    |     |     |     |     |     |     |     |     |     |     |
|------------|------|----|----|----|----|----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|
| 690 V (kW) | 18.5 | 22 | 30 | 37 | 45 | 55 | 75  | 90  | 110 | 132 | 160 | 200 | 250 | 315 | 400 | 450 |
| 690 V (HP) | 25   | 30 | 40 | 50 | 60 | 75 | 100 | 125 | 150 | 175 | 215 | 270 | 335 | 425 | 530 | 600 |
| Frame Size | C    |    |    |    | D  |    | E   |     |     |     | F   |     | G   |     | H   |     |

## Advanced Drive Controls

### High Performance

1. High bandwidth control
2. Speed / torque / position control mode
3. Dual rating design (normal duty / heavy duty)
4. 4-quadrant torque control and limit
5. For both synchronous and asynchronous motors

### Environmental Adaptability

1. 50°C operating temperature
2. Built-in DC reactor
3. Coated circuit boards
4. Built-in EMC filter
5. International safety standard (CE/UL/cUL)

\*Note: Please refer to the Product Specification



|     |     |     |     |     |     |     |     |     |     |
|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|
| 90  | 110 | 132 | 160 | 185 | 220 | 280 | 315 | 355 | 450 |
| 125 | 150 | 175 | 215 | 250 | 300 | 375 | 425 | 475 | 600 |
| E   |     | F   |     | G   |     | H   |     |     |     |

|     |     |
|-----|-----|
| 560 | 630 |
| 745 | 840 |

#### ▪ Versatile Drive Controls

1. Built-in safe stop function
2. Built-in PLC function
3. Built-in brake unit
4. Supports various network protocols
5. Position control

#### ▪ Modular Design

1. Hot pluggable LCD keypad
2. I/O extension cards
3. Various PG (encoder) feedback cards
4. Network cards for fieldbus modules
5. Removable fan



# Modular Design

Various accessories options, such as I/O extension cards, encoder feedback cards, communication cards, hot pluggable LCD keypad, removable terminals and removable fans.

## ► PG (Encoder) cards

EMC-PG01O / EMC-PG02O



EMC-PG01U / EMC-PG02U



EMC-PG01L / EMC-PG02L



EMC-PG01R



## ■ Removable fan

To ensure personal safety, do not begin wiring before the indicator light is off.

## ■ Power indicator

To prevent personal injury, please do not perform wiring before power indicator is off.

## ■ Removable terminals

Convenient wiring and safety equipment.

## ► I/O extension cards

EMC-D611A



EMC-D42A



EMC-A22A



EMC-BPS01



## ► Relay Extension Card

EMC-R6AA



## ► Communication cards

CMC-PD01



CMC-DN01



CMC-MOD01 / CMC-EIP01




EMC-COP01




CMC-EC01




Analogue I/O switch



Termination resistor



Dual RJ45 communication ports



\*NOTE: "►" are optional accessories.

The modular design fulfills the needs of system applications and equipment maintenance.



## Excellent Environment Adaptability

- ▶ Built-in DC choke to suppress harmonics\*
- ▶ Built-in EMC filter to filter noise\*
- ▶ Conformal coating (Class 3C3 of IEC60721-3-3 standard) ensures drive operation stability and safety in critical environments.
- ▶ The electronic components of the drive are isolated from the cooling system to reduce heat interference. Dissipated heat can be discharged by flange-mounting installation, and forced fan cooling can import cold air into the heat sink. The heat dissipation performance is optimized by these two cooling methods.

\*Note: Please refer to the Product Specification



## Certifications

|         |                                                                                                                                              |
|---------|----------------------------------------------------------------------------------------------------------------------------------------------|
| UL, cUL | CE                                                                                                                                           |
| C-Tick  | Low Voltage: EN61800-5-1                                                                                                                     |
| ROHS    | EMC: EN61000-3-12, EN61800-3, IEC61000-6-2, IEC61000-6-4, IEC61000-4-2, IEC61000-4-3, IEC61000-4-4, IEC61000-4-5, IEC61000-4-6, IEC61000-4-8 |

## Quick and Easy Parameters Setting via the LCD Keypad

- Multi-column display for the drive status
- Simple and intuitive operation
- User-defined parameter groups
- Real Time Clock and calendar function
- Language selection for display
- Copy function saves parameters and PLC programs to the keypad memory for later transfer to another drive
- IP66 protection level



F1 to F4: User-defined function keys

Selection keys


LED displays the current drive status



Create homepage logo




Editable message display

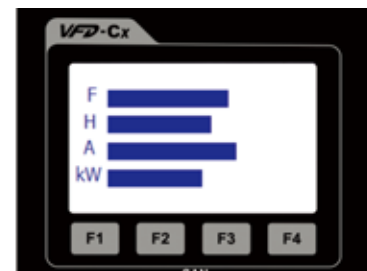

Editable chart display

## Intelligent PLC Functions

- Built-in 10K steps capacity of PLC functions. Distributed control and independent operation are easily achieved via network connection.
- CANopen Master protocol and PLC functions provide synchronous control and fast data exchange.

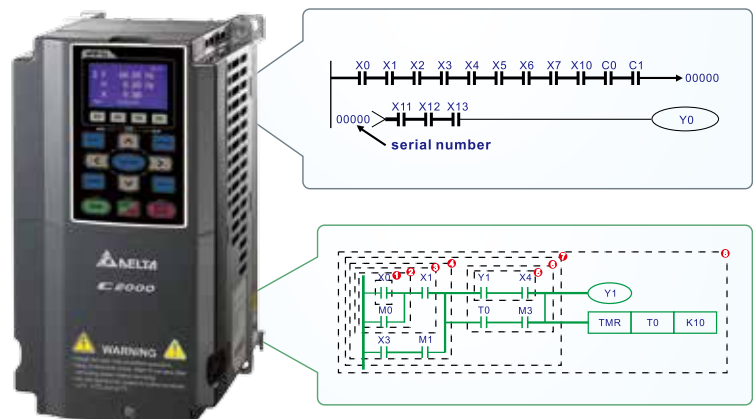

# High-Speed Network


- ▶ Provides optional MODBUS RTU and various fieldbus cards for flexible applications



## ■ CANopen (DS402)

**Ability to control up to 8 Slave drives via the CANopen Master function**


- Supports all Delta industrial automation products (Built-in EDS files for all Delta industrial automation products)
- I/O data configurations for each device on the CANopen network
- Motion control planning function
- WPL Soft

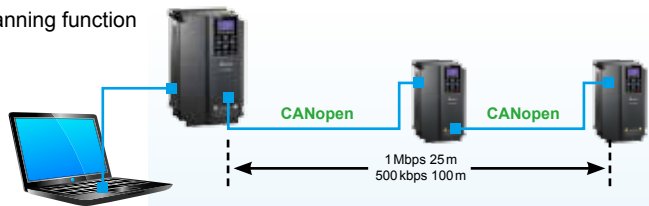

- TAP-CN03 distribution box for long distances



- RJ45 cable



## ■ DeviceNet

**Through the Delta specially designed DeviceNet Builder software, users can easily establish a standard DeviceNet control network by the parameter pre-assignment function for each equipment and remote I/O.**

- Supports all Delta industrial automation products (Built-in EDS files for all Delta industrial automation products)
- I/O data configurations for each device on the DeviceNet network
- DeviceNet layout software



## ■ EtherNet/IP

### ■ MODBUS TCP


**Delta provides communication integrator software that offers graphic module settings and a user friendly interface to support all Ethernet products settings and online monitoring.**

- Delta software for Ethernet/MODBUS TCP products
- Graphic module settings and a user friendly interface
- Auto search function
- Supports Virtual COM settings



# Convenient Drive System Management Platform

- Provides a complete operation platform for users' easy control and monitoring via PC, including parameters save/setting, real-time wave monitor, quick setup, for multiple languages and with multi-language operation systems.


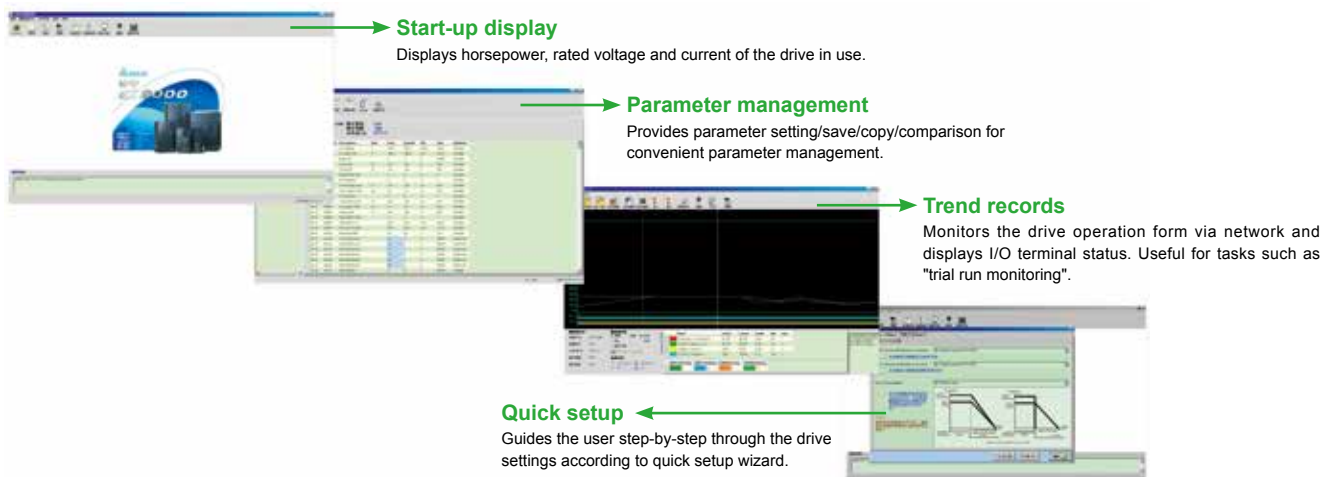


\*NOTE: These software programs are available for download on Delta's website

## High-Performance Field Oriented Control


The FOC+PG mode of C2000 Series can output 150% of starting torque at extremely low speeds for precise and stable speed control.

Precise position and speed control ideal for printing machine applications.

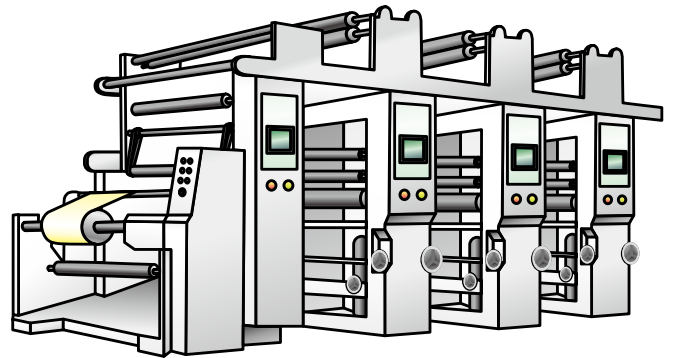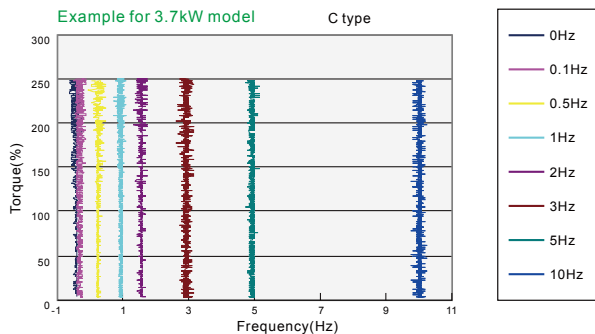


## Fast Response to Impact Load

During load changes, the C2000 Series calculates the required torque response and minimizes the vibration caused by load impact using FOC.

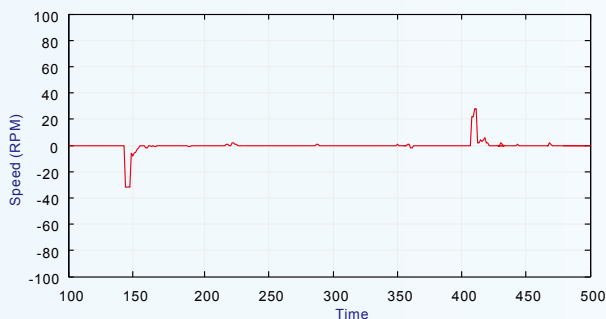

## Auto Energy-Saving Operation


Auto-calculates the optimal voltage for the load output using load power when under constant speed operation.

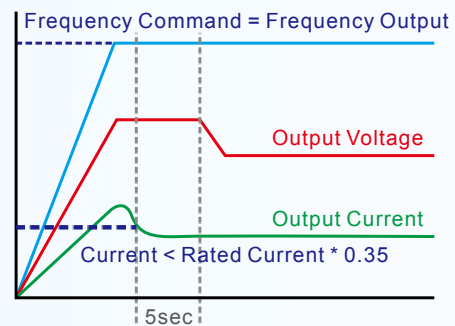


## Deceleration Energy Backup (DEB)

This function controls the motor deceleration to stop when power blinks off to prevent mechanical damage and then accelerates to its original operation speed when power resumes.

— Input Voltage  
— Motor Speed

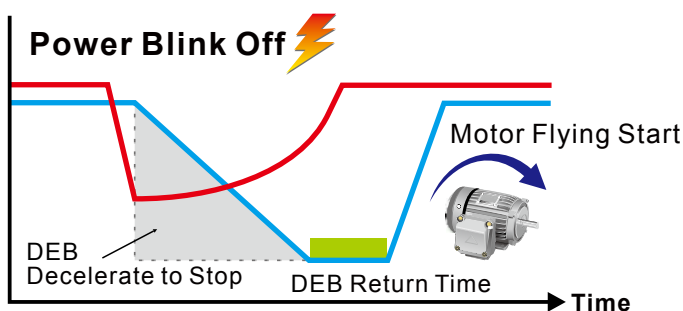


— Input Voltage  
— Motor Speed

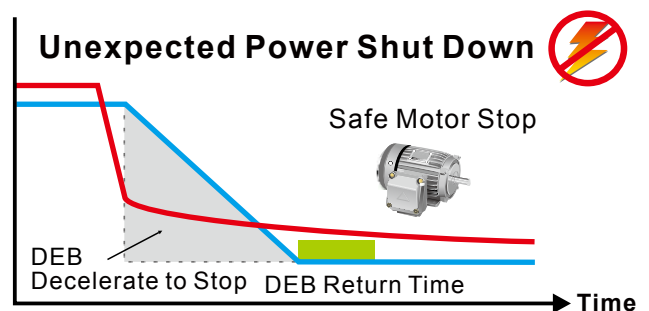


## A Drive for Permanent Magnet (PM) Motors

The C2000 is a dual mode drive to control both an induction motor and permanent magnet motor. The dynamic response of a PM motor provides precise control of position, speed and torque.

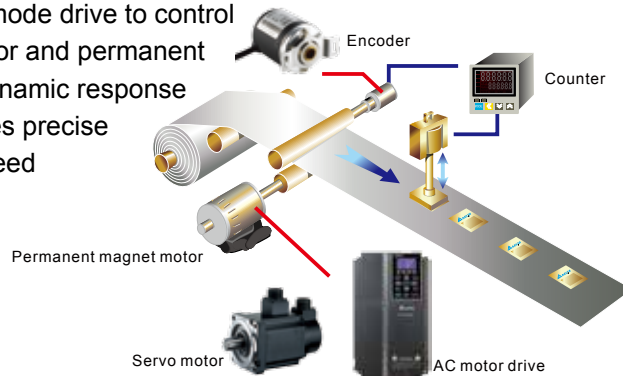

## Delta REG2000 Series for Power Regeneration

Using the REG2000 with the C2000 in a crane and hoist application provides the user with a four-quadrant operation and energy saving results.

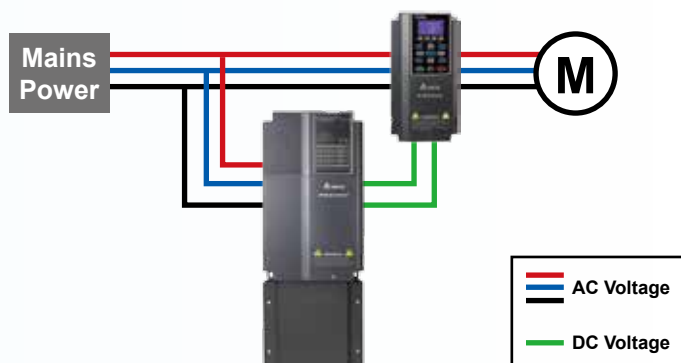

## Delta AFE2000 Series for Power Regeneration and Power Quality Improvement

The Active Front End Unit (AFE2000) helps to reduce torque ripple and harmonics with a higher power factor to provide excellent production quality and outstanding energy saving results.



# Delta Active Front End AFE2000 Series



## Features

- Replaces traditional brake resistor to reduce heat generation.
- Clear energy savings: more than 95% of the regenerative energy is converted into electricity and supplied back to the mains.
- Full-load operation: input-side current THD lower than 5% and improves power factor up to 99%.
- AC motor drives with AFE2000: supports 4-quadrant operation with variable frequencies and adjustable system.
- Constant DC bus voltage: unaffected by mains voltage fluctuations.




**Improves power factor and decreases harmonic distortion.**

**THD ≤ 5%, power factor > 99%**

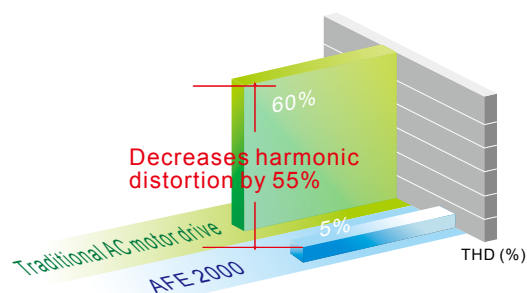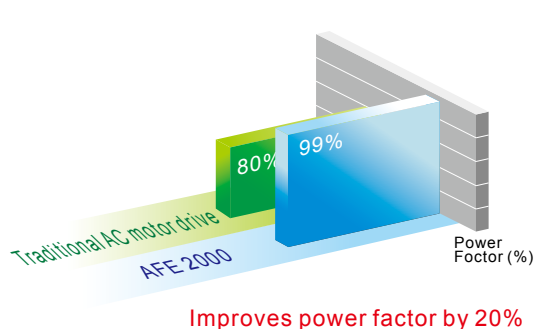

## Applications

- Large-inertia loads, such as centrifuge equipment, dewatering machines and roving machines
- 4-quadrant loads including elevators, cranes and pumpjacks (oil extraction machines)
- Quick braking, such as machine tools, bag making machines, auto storage and retrieval systems, and lathes
- Long-term energy feedback, such as wind power, water power, steel printing and paper making machinery (winding equipment)
- Improves power quality for industries such as semiconductor and panel industries

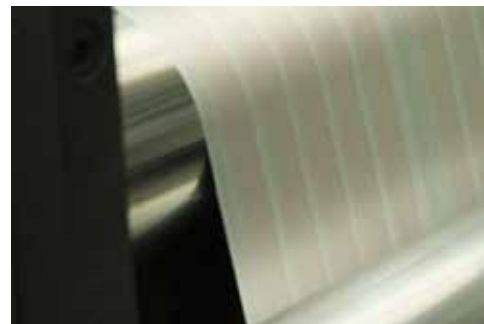

## Operation Temperature and Protection Level

| Model                          | Frame                                                     | Top Cover               | Conduit Box            | Protection Level                                                                                                                                                 | Operation Temperature |
|--------------------------------|-----------------------------------------------------------|-------------------------|------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------|
| VFDxxxCxxA<br>VFDxxxCxxS       | Frame A ~ C<br>230 V: 0.75 ~ 22 kW<br>460 V: 0.75 ~ 30 kW | Remove top cover        | Standard conduit plate | IP20 / UL Open Type                                                                                                                                              | -10 °C ~ 50 °C        |
|                                |                                                           | Standard with top cover |                        | IP20 / UL Type1 / NEMA1                                                                                                                                          | -10 °C ~ 40 °C        |
|                                | Frame D ~ H<br>230 V: > 22 kW<br>460 V: > 30 kW           | N / A                   | No conduit box         |  <p>Protection degree for the circled area is IP00, other areas are IP20</p>   | -10 °C ~ 50 °C        |
| VFDxxxCxxE<br>VFDxxxCxxU       | Frame A ~ C<br>460 V: 0.75 ~ 30 kW                        | Remove top cover        | Standard conduit plate | IP20 / UL Open Type                                                                                                                                              | -10 °C ~ 50 °C        |
|                                |                                                           | Standard with top cover |                        | IP20 / UL Type1 / NEMA1                                                                                                                                          | -10 °C ~ 40 °C        |
|                                | Frame D ~ H<br>230 V: > 22 kW<br>460 V: > 30 kW           | N / A                   | Standard conduit box   | IP20 / UL Type1 / NEMA1                                                                                                                                          | -10 °C ~ 40 °C        |
| VFDxxxC53A-21<br>VFDxxxC63B-21 | Frame A ~ C<br>1.5 ~ 37 kW                                | Remove top cover        | Standard conduit plate | IP20 / UL Open Type                                                                                                                                              | -10 °C ~ 50 °C        |
|                                |                                                           | Standard with top cover |                        | IP20 / UL Type1 / NEMA1                                                                                                                                          | -10 °C ~ 40 °C        |
| VFDxxxC63B-21                  | Frame D ~ H<br>> 45 kW                                    | N / A                   | Standard conduit box   | IP20 / UL Type1 / NEMA1                                                                                                                                          | -10 °C ~ 40 °C        |
| VFDxxxC63B-00                  | Frame D ~ H<br>> 45 kW                                    | N / A                   | No conduit box         |  <p>Protection degree for the circled area is IP00, other areas are IP20</p> | -10 °C ~ 50 °C        |



# Environment for Operation, Storage and Transportation

DO NOT expose the AC motor drive to harsh environments, such as dust, direct sunlight, corrosive/flammable gasses, humidity, liquid or vibrations. The salts in the air must be less than 0.01 mg/cm<sup>2</sup> per year.

|                    |                                                                                                                                                                                                            |                                                                                                                                                                                                                                                                                                                                                                           |                      |
|--------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------|
| Environment        | Installation Location                                                                                                                                                                                      | IEC60364-1/IEC60664-1 Pollution degree 2, indoor use only                                                                                                                                                                                                                                                                                                                 |                      |
|                    | Surrounding Temperature (°C)                                                                                                                                                                               | Storage/Transportation                                                                                                                                                                                                                                                                                                                                                    | -25 ~ 70             |
|                    |                                                                                                                                                                                                            | Only allowed in non-condensation, non-frost, non-conductive environment.                                                                                                                                                                                                                                                                                                  |                      |
|                    | Rated Humidity                                                                                                                                                                                             | Operation/Storage/Transportation                                                                                                                                                                                                                                                                                                                                          | Max. 95%             |
|                    |                                                                                                                                                                                                            | Only allowed in non-condensation, non-frost, non-conductive environment.                                                                                                                                                                                                                                                                                                  |                      |
|                    | Air Pressure (kPa)                                                                                                                                                                                         | Operation/Storage                                                                                                                                                                                                                                                                                                                                                         | 86 ~ 106             |
|                    |                                                                                                                                                                                                            | Transportation                                                                                                                                                                                                                                                                                                                                                            | 70 ~ 106             |
|                    | Pollution Level                                                                                                                                                                                            | IEC60721-3-3                                                                                                                                                                                                                                                                                                                                                              |                      |
|                    |                                                                                                                                                                                                            | Operation                                                                                                                                                                                                                                                                                                                                                                 | Class 3C3; Class 3S2 |
|                    |                                                                                                                                                                                                            | Storage                                                                                                                                                                                                                                                                                                                                                                   | Class 1C2; Class 1S2 |
|                    |                                                                                                                                                                                                            | Transportation                                                                                                                                                                                                                                                                                                                                                            | Class 2C2; Class 2S2 |
| Altitude           | If the AC motor drive is to be used under harsh environment with high level of contamination (e.g. dew, water, dust), make sure it is installed in an environment qualified for IP54 such as in a cabinet. |                                                                                                                                                                                                                                                                                                                                                                           |                      |
|                    | Operation                                                                                                                                                                                                  | If the AC motor drive is installed at an altitude 0 ~ 1000m, follow normal operation restriction. If it is installed at altitude 1000 ~ 2000m, decrease 1% of rated current or lower 0.5°C of temperature for every 100m increase in altitude. Maximum altitude for Corner Grounded TN system is 2000m, for application over 2000m please contact Delta for more details. |                      |
| Package Drop       | Storage/Transportation                                                                                                                                                                                     | ISTA procedure 1A (according to weight) IEC60068-2-31                                                                                                                                                                                                                                                                                                                     |                      |
| Vibration          | 1.0mm, peak to peak value range from 2Hz to 13.2Hz; 0.7G ~ 1.0G range from 13.2Hz to 55Hz; 1.0G range from 55Hz to 512Hz. Comply with IEC 60068-2-6.                                                       |                                                                                                                                                                                                                                                                                                                                                                           |                      |
| Impact             | IEC/EN 60068-2-27                                                                                                                                                                                          |                                                                                                                                                                                                                                                                                                                                                                           |                      |
| Operation Position | Max. allowed offset angle ±10° (under normal installation position)                                                                                                                                        |                                                                                                                                                                                                                                                                                         |                      |

## Specifications

| 230V                       |                         |                              |                                               |                                                                                                            |      |     |         |      |     |           |     |                            |            |                             |            |     |                           |           |     |     |
|----------------------------|-------------------------|------------------------------|-----------------------------------------------|------------------------------------------------------------------------------------------------------------|------|-----|---------|------|-----|-----------|-----|----------------------------|------------|-----------------------------|------------|-----|---------------------------|-----------|-----|-----|
| Frame Size                 |                         |                              | A                                             |                                                                                                            |      |     | B       |      |     | C         |     |                            | D          |                             | E          |     |                           | F         |     |     |
| Model VFD- □□□C□□          |                         |                              | 007                                           | 015                                                                                                        | 022  | 037 | 055     | 075  | 110 | 150       | 185 | 220                        | 300        | 370                         | 450        | 550 | 750                       | 900       |     |     |
| Output Rating *            | NORMAL DUTY             | Rated Output Capacity (kVA)  |                                               | 2.0                                                                                                        | 3.2  | 4.4 | 6.8     | 10   | 13  | 20        | 26  | 30                         | 36         | 48                          | 58         | 72  | 86                        | 102       | 138 |     |
|                            |                         | Rated Output Current (A)     |                                               | 5                                                                                                          | 8    | 11  | 17      | 25   | 33  | 49        | 65  | 75                         | 90         | 120                         | 146        | 180 | 215                       | 255       | 346 |     |
|                            |                         | Applicable Motor Output (kW) |                                               | 0.75                                                                                                       | 1.5  | 2.2 | 3.7     | 5.5  | 7.5 | 11        | 15  | 18.5                       | 22         | 30                          | 37         | 45  | 55                        | 75        | 90  |     |
|                            |                         | Applicable Motor Output (HP) |                                               | 1                                                                                                          | 2    | 3   | 5       | 7.5  | 10  | 15        | 20  | 25                         | 30         | 40                          | 50         | 60  | 75                        | 100       | 120 |     |
|                            |                         | Overload Capacity            |                                               | 120% of rated current: 1 minute for every 5 minutes; 160% of rated current: 3 seconds for every 30 seconds |      |     |         |      |     |           |     |                            |            |                             |            |     |                           |           |     |     |
|                            |                         | Max. Output Frequency (Hz)   |                                               | 0.00 ~ 599.00                                                                                              |      |     |         |      |     |           |     |                            |            |                             |            |     |                           |           |     |     |
|                            | HEAVY DUTY              | Carrier Frequency (kHz)      |                                               | 2 ~ 15 (default setting 8)                                                                                 |      |     |         |      |     |           |     | 2 ~ 10 (default setting 6) |            |                             |            |     | 2 ~ 9 (default setting 4) |           |     |     |
|                            |                         | Rated Output Capacity (kVA)  |                                               | 1.9                                                                                                        | 2.8  | 4.0 | 6.4     | 9.6  | 12  | 19        | 25  | 28                         | 34         | 45                          | 55         | 68  | 81                        | 96        | 131 |     |
|                            |                         | Rated Output Current (A)     |                                               | 4.8                                                                                                        | 7.1  | 10  | 16      | 24   | 31  | 47        | 62  | 71                         | 86         | 114                         | 139        | 171 | 204                       | 242       | 329 |     |
|                            |                         | Applicable Motor Output (kW) |                                               | 0.4                                                                                                        | 0.75 | 1.5 | 2.2     | 3.7  | 5.5 | 7.5       | 11  | 15                         | 19         | 22                          | 30         | 37  | 45                        | 55        | 75  |     |
|                            |                         | Applicable Motor Output (HP) |                                               | 0.5                                                                                                        | 1    | 2   | 3       | 5    | 7.5 | 10        | 15  | 20                         | 25         | 30                          | 40         | 50  | 60                        | 75        | 100 |     |
|                            |                         | Overload Capacity            |                                               | 150% of rated current: 1 minute for every 5 minutes; 180% of rated current: 3 seconds for every 30 seconds |      |     |         |      |     |           |     |                            |            |                             |            |     |                           |           |     |     |
| Max. Output Frequency (Hz) |                         | 0.00 ~ 300.00                |                                               |                                                                                                            |      |     |         |      |     |           |     |                            |            |                             |            |     |                           |           |     |     |
| Carrier Frequency (kHz)    |                         | 2 ~ 6 (default setting 2)    |                                               |                                                                                                            |      |     |         |      |     |           |     |                            |            |                             |            |     |                           |           |     |     |
| Input Rating               | Input Current (A)       |                              | Normal Duty                                   |                                                                                                            | 6.4  | 12  | 16      | 20   | 28  | 36        | 52  | 72                         | 83         | 99                          | 124        | 143 | 171                       | 206       | 245 | 331 |
|                            |                         |                              | Heavy Duty                                    |                                                                                                            | 6.1  | 11  | 15      | 18.5 | 26  | 34        | 50  | 68                         | 78         | 95                          | 118        | 136 | 162                       | 196       | 233 | 315 |
|                            | Rated Voltage/Frequency |                              | 3-phase AC 200V ~ 240V (-15% ~ +10%), 50/60Hz |                                                                                                            |      |     |         |      |     |           |     |                            |            |                             |            |     |                           |           |     |     |
|                            | Operating Voltage Range |                              | 170 ~ 264V <sub>ac</sub>                      |                                                                                                            |      |     |         |      |     |           |     |                            |            |                             |            |     |                           |           |     |     |
| Frequency Tolerance        |                         | 47 ~ 63Hz                    |                                               |                                                                                                            |      |     |         |      |     |           |     |                            |            |                             |            |     |                           |           |     |     |
| Drive Weight (Kg)          |                         |                              | 2.6 ± 0.3                                     |                                                                                                            |      |     | 5.4 ± 1 |      |     | 9.8 ± 1.5 |     |                            | 38.5 ± 1.5 |                             | 64.8 ± 1.5 |     |                           | 86.5± 1.5 |     |     |
| Efficiency (%)             |                         |                              | 97.8                                          |                                                                                                            |      |     |         |      |     |           |     |                            |            |                             |            |     |                           | 98.2      |     |     |
| Power Factor               |                         |                              | > 0.98                                        |                                                                                                            |      |     |         |      |     |           |     |                            |            |                             |            |     |                           |           |     |     |
| Cooling Method             |                         |                              | Natural cooling                               | Fan cooling                                                                                                |      |     |         |      |     |           |     |                            |            |                             |            |     |                           |           |     |     |
| Braking Chopper            |                         |                              | Frame A, B, C: built-in                       |                                                                                                            |      |     |         |      |     |           |     |                            |            | Frame D and above: optional |            |     |                           |           |     |     |
| DC Choke                   |                         |                              | Frame A, B, C: optional                       |                                                                                                            |      |     |         |      |     |           |     |                            |            | Frame D and above: built-in |            |     |                           |           |     |     |
| EMC Filter                 |                         |                              | Optional                                      |                                                                                                            |      |     |         |      |     |           |     |                            |            | Optional                    |            |     |                           |           |     |     |
| EMC-COP01                  |                         |                              | Optional                                      |                                                                                                            |      |     |         |      |     |           |     |                            |            |                             |            |     |                           |           |     |     |

\* The factory setting is Normal Duty mode

| 460V             |                              |                                                                                                            |                                                                                                            |           |             |     |      |     |                            |     |     |           |      |     |
|------------------|------------------------------|------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------|-----------|-------------|-----|------|-----|----------------------------|-----|-----|-----------|------|-----|
| Frame Size       |                              |                                                                                                            | A                                                                                                          |           |             |     |      | B   |                            |     | C   |           |      |     |
| Model VFD-□□□C□□ |                              |                                                                                                            | 007                                                                                                        | 015       | 022         | 037 | 040  | 055 | 075                        | 110 | 150 | 185       | 220  | 300 |
| Output Rating *  | NORMAL DUTY                  | Rated Output Capacity (kVA)                                                                                | 2.4                                                                                                        | 3.2       | 4.8         | 7.2 | 8.4  | 10  | 14                         | 19  | 25  | 30        | 36   | 48  |
|                  |                              | Rated Output Current (A)                                                                                   | 3.0                                                                                                        | 4.0       | 6.0         | 9.0 | 10.5 | 12  | 18                         | 24  | 32  | 38        | 45   | 60  |
|                  |                              | Applicable Motor Output (kW)                                                                               | 0.75                                                                                                       | 1.5       | 2.2         | 3.7 | 4.0  | 5.5 | 7.5                        | 11  | 15  | 18.5      | 22   | 30  |
|                  |                              | Applicable Motor Output (HP)                                                                               | 1                                                                                                          | 2         | 3           | 5   | 5    | 7.5 | 10                         | 15  | 20  | 25        | 30   | 40  |
|                  |                              | Overload Capacity                                                                                          | 120% of rated current: 1 minute for every 5 minutes; 160% of rated current: 3 seconds for every 30 seconds |           |             |     |      |     |                            |     |     |           |      |     |
|                  | HEAVY DUTY                   | Max. Output Frequency (Hz)                                                                                 | 0.00 ~ 599.00                                                                                              |           |             |     |      |     |                            |     |     |           |      |     |
|                  |                              | Carrier Frequency (kHz)                                                                                    | 2 ~ 15 (default setting 8)                                                                                 |           |             |     |      |     | 2 ~ 10 (default setting 6) |     |     |           |      |     |
|                  |                              | Rated Output Capacity (kVA)                                                                                | 2.3                                                                                                        | 3.0       | 4.5         | 6.5 | 7.6  | 9.6 | 14                         | 18  | 24  | 29        | 34   | 45  |
|                  |                              | Rated Output Current (A)                                                                                   | 2.9                                                                                                        | 3.8       | 5.7         | 8.1 | 9.5  | 11  | 17                         | 23  | 30  | 36        | 43   | 57  |
|                  |                              | Applicable Motor Output (kW)                                                                               | 0.4                                                                                                        | 0.75      | 1.5         | 2.2 | 3.7  | 4.0 | 5.5                        | 7.5 | 11  | 15        | 18.5 | 22  |
| Input Rating     | Applicable Motor Output (HP) | 0.5                                                                                                        | 1                                                                                                          | 2         | 3           | 5   | 5    | 7.5 | 10                         | 15  | 20  | 25        | 30   |     |
|                  | Overload Capacity            | 150% of rated current: 1 minute for every 5 minutes; 180% of rated current: 3 seconds for every 30 seconds |                                                                                                            |           |             |     |      |     |                            |     |     |           |      |     |
|                  | Max. Output Frequency (Hz)   | 0.00 ~ 300.00                                                                                              |                                                                                                            |           |             |     |      |     |                            |     |     |           |      |     |
|                  | Carrier Frequency (kHz)      | 2 ~ 6 (default setting 2)                                                                                  |                                                                                                            |           |             |     |      |     |                            |     |     |           |      |     |
|                  | Input Current (A)            | Normal Duty                                                                                                | 4.3                                                                                                        | 5.9       | 8.7         | 14  | 15.5 | 17  | 20                         | 26  | 35  | 40        | 47   | 63  |
|                  |                              | Heavy Duty                                                                                                 | 4.1                                                                                                        | 5.6       | 8.3         | 13  | 14.5 | 16  | 19                         | 25  | 33  | 38        | 45   | 60  |
|                  | Rated Voltage /Frequency     |                                                                                                            | 3-phase AC 380 V ~ 480 V ( -15% ~ +10%), 50/60 Hz                                                          |           |             |     |      |     |                            |     |     |           |      |     |
|                  | Operating Voltage Range      |                                                                                                            | 323 ~ 528 V <sub>AC</sub>                                                                                  |           |             |     |      |     |                            |     |     |           |      |     |
|                  | Frequency Tolerance          |                                                                                                            | 47 ~ 63Hz                                                                                                  |           |             |     |      |     |                            |     |     |           |      |     |
|                  | Drive Weight (Kg)            |                                                                                                            |                                                                                                            | 2.6 ± 0.3 |             |     |      |     | 5.4 ± 1                    |     |     | 9.8 ± 1.5 |      |     |
| Efficiency (%)   |                              |                                                                                                            | 97.8                                                                                                       |           |             |     |      |     |                            |     |     |           |      |     |
| Power Factor     |                              |                                                                                                            | > 0.98                                                                                                     |           |             |     |      |     |                            |     |     |           |      |     |
| Cooling Method   |                              |                                                                                                            | Natural cooling                                                                                            |           | Fan cooling |     |      |     |                            |     |     |           |      |     |
| Braking Chopper  |                              |                                                                                                            | Frame A, B, C: built-in; Frame D and above: optional                                                       |           |             |     |      |     |                            |     |     |           |      |     |
| DC Choke         |                              |                                                                                                            | Frame A, B, C: optional; Frame D and above: built-in                                                       |           |             |     |      |     |                            |     |     |           |      |     |
| EMC Filter       |                              |                                                                                                            | VFDXXXC43A: Optional; Frame A~C VFDXXXC43E: Built-in                                                       |           |             |     |      |     |                            |     |     |           |      |     |
| EMC-COP01        |                              |                                                                                                            | VFDXXXC43A: optional; VFDXXC43E: built-in                                                                  |           |             |     |      |     |                            |     |     |           |      |     |

| 460V             |                              |                                                                                                            |                                                                                                            |        |     |          |     |                           |      |          |      |       |      |      |      |      |
|------------------|------------------------------|------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------|--------|-----|----------|-----|---------------------------|------|----------|------|-------|------|------|------|------|
| Frame Size       |                              |                                                                                                            | D0                                                                                                         |        | D   |          | E   |                           | F    |          | G    |       | H    |      |      |      |
| Model VFD-□□□C□□ |                              |                                                                                                            | 370                                                                                                        | 450    | 550 | 750      | 900 | 1100                      | 1320 | 1600     | 1850 | 2200  | 2800 | 3150 | 3550 | 4500 |
| Output Rating *  | NORMAL DUTY                  | Rated Output Capacity (kVA)                                                                                | 58                                                                                                         | 73     | 88  | 120      | 143 | 175                       | 207  | 247      | 295  | 367   | 438  | 491  | 544  | 720  |
|                  |                              | Rated Output Current (A)                                                                                   | 73                                                                                                         | 91     | 110 | 150      | 180 | 220                       | 260  | 310      | 370  | 460   | 550  | 616  | 683  | 866  |
|                  |                              | Applicable Motor Output (kW)                                                                               | 37                                                                                                         | 45     | 55  | 75       | 90  | 110                       | 132  | 160      | 185  | 220   | 280  | 315  | 355  | 450  |
|                  |                              | Applicable Motor Output (HP)                                                                               | 50                                                                                                         | 60     | 75  | 100      | 125 | 150                       | 175  | 215      | 250  | 300   | 375  | 420  | 475  | 600  |
|                  |                              | Overload Capacity                                                                                          | 120% of rated current: 1 minute for every 5 minutes; 160% of rated current: 3 seconds for every 30 seconds |        |     |          |     |                           |      |          |      |       |      |      |      |      |
|                  | HEAVY DUTY                   | Max. Output Frequency (Hz)                                                                                 | 0.00 ~ 599.00                                                                                              |        |     |          |     |                           |      |          |      |       |      |      |      |      |
|                  |                              | Carrier Frequency (kHz)                                                                                    | 2 ~ 10 (default setting 6)                                                                                 |        |     |          |     | 2 ~ 9 (default setting 4) |      |          |      |       |      |      |      |      |
|                  |                              | Rated Output Capacity (kVA)                                                                                | 55                                                                                                         | 69     | 84  | 114      | 136 | 167                       | 197  | 235      | 280  | 348   | 417  | 466  | 517  | 677  |
|                  |                              | Rated Output Current (A)                                                                                   | 69                                                                                                         | 86     | 105 | 143      | 171 | 209                       | 247  | 295      | 352  | 437   | 523  | 585  | 649  | 815  |
|                  |                              | Applicable Motor Output (kW)                                                                               | 30                                                                                                         | 37     | 45  | 55       | 75  | 90                        | 110  | 132      | 160  | 185   | 220  | 280  | 315  | 355  |
| Input Rating     | Applicable Motor Output (HP) | 40                                                                                                         | 53                                                                                                         | 60     | 75  | 100      | 125 | 150                       | 175  | 215      | 250  | 300   | 375  | 425  | 475  |      |
|                  | Overload Capacity            | 150% of rated current: 1 minute for every 5 minutes; 180% of rated current: 3 seconds for every 30 seconds |                                                                                                            |        |     |          |     |                           |      |          |      |       |      |      |      |      |
|                  | Max. Output Frequency (Hz)   | 0.00 ~ 300.00                                                                                              |                                                                                                            |        |     |          |     |                           |      |          |      |       |      |      |      |      |
|                  | Carrier Frequency (kHz)      | 2 ~ 6 (default setting 2)                                                                                  |                                                                                                            |        |     |          |     |                           |      |          |      |       |      |      |      |      |
|                  | Input Current (A)            | Normal Duty                                                                                                | 74                                                                                                         | 101    | 114 | 157      | 167 | 207                       | 240  | 300      | 380  | 400   | 494  | 555  | 625  | 866  |
|                  |                              | Heavy Duty                                                                                                 | 70                                                                                                         | 96     | 108 | 149      | 159 | 197                       | 228  | 285      | 361  | 380   | 469  | 527  | 594  | 815  |
|                  | Rated Voltage /Frequency     |                                                                                                            | 3 - phase AC 380 V ~ 480 V ( -15% ~ +10% ), 50/60 Hz                                                       |        |     |          |     |                           |      |          |      |       |      |      |      |      |
|                  | Operating Voltage Range      |                                                                                                            | 323 ~ 528 V <sub>AC</sub>                                                                                  |        |     |          |     |                           |      |          |      |       |      |      |      |      |
|                  | Frequency Tolerance          |                                                                                                            | 47 ~ 63Hz                                                                                                  |        |     |          |     |                           |      |          |      |       |      |      |      |      |
|                  | Drive Weight (Kg)            |                                                                                                            |                                                                                                            | 27±1.5 |     | 38.5±1.5 |     | 64.8±1.5                  |      | 86.5±1.5 |      | 134±4 |      | 228  |      |      |
| Efficiency (%)   |                              |                                                                                                            | 97.8                                                                                                       |        |     |          |     | 98.2                      |      |          |      |       |      |      |      |      |
| Power Factor     |                              |                                                                                                            | > 0.98                                                                                                     |        |     |          |     |                           |      |          |      |       |      |      |      |      |
| Cooling Method   |                              |                                                                                                            | Fan cooling                                                                                                |        |     |          |     |                           |      |          |      |       |      |      |      |      |
| Braking Chopper  |                              |                                                                                                            | Frame A, B, C: built-in; Frame D and above: optional                                                       |        |     |          |     |                           |      |          |      |       |      |      |      |      |
| DC Choke         |                              |                                                                                                            | Frame A, B, C: optional; Frame D and above: built-in                                                       |        |     |          |     |                           |      |          |      |       |      |      |      |      |
| EMC Filter       |                              |                                                                                                            | Frame D0~H: Optional                                                                                       |        |     |          |     |                           |      |          |      |       |      |      |      |      |
| EMC-COP01        |                              |                                                                                                            | VFDXXXC43A: optional; VFDXXC43E: built-in                                                                  |        |     |          |     |                           |      |          |      |       |      |      |      |      |

\* The factory setting is Normal Duty mode

#### NOTES

- 1) The carrier frequency is default. Increasing the carrier frequency requires a reduction in current. please refer to Pr. 06-55 Derating Protection drawing.
- 2) The AC motor drive should operate in derating current when its control method is set to FOC Sensorless, TQC+PG, TQC sensorless. PM+PG, PM sensorless. Please refer to Pr. 06-55 for more information.
- 3) Select the AC motor drive with capacity one grade larger for the impact load application.
- 4) The rated input current will be affected not only by Power Transformer and the connection of the reactors on input side, but also fluctuates with the impedance of power side.
- 5) For Frame A, B and C, Model VFDXXXC43A is under IP20/NEMA1/UL TYPE1 protection level.
- 6) For Frame D and above, if the last character of the model is A then it is under IP20 protection level but the wiring terminal is under IP00 protection level;
- 7) if the last character of the model is E, it is under IP20/NEMA1/UL TYPE1 protection level.

| 575V                    |                         |                              |                                                                         |     |             |       |      |      |      |
|-------------------------|-------------------------|------------------------------|-------------------------------------------------------------------------|-----|-------------|-------|------|------|------|
| Frame Size              |                         |                              | A                                                                       |     |             | B     |      |      |      |
| Model VFD-□□□C53A-21    |                         |                              | 015                                                                     | 022 | 037         | 055   | 075  | 110  | 150  |
| Output *                | Light Duty              | Rated Output Capacity (kVA)  | 3                                                                       | 4.3 | 6.7         | 9.9   | 12.1 | 18.7 | 24.1 |
|                         |                         | Rated Output Current (A)     | 3                                                                       | 4.3 | 6.7         | 9.9   | 12.1 | 18.7 | 24.2 |
|                         |                         | Applicable Motor Output (kW) | 1.5                                                                     | 2.2 | 3.7         | 5.5   | 7.5  | 11   | 15   |
|                         |                         | Applicable Motor Output (HP) | 2                                                                       | 3   | 5           | 7.5   | 10   | 15   | 20   |
|                         | Normal Duty             | Rated Output Capacity (kVA)  | 2.5                                                                     | 3.6 | 5.5         | 8.2   | 10   | 15.4 | 19.9 |
|                         |                         | Rated Output Current (A)     | 2.5                                                                     | 3.6 | 5.5         | 8.2   | 10   | 15.5 | 20   |
|                         |                         | Applicable Motor Output (kW) | 0.75                                                                    | 1.5 | 2.2         | 3.7   | 5.5  | 7.5  | 11   |
|                         |                         | Applicable Motor Output (HP) | 1                                                                       | 2   | 3           | 5     | 7.5  | 10   | 15   |
|                         | Heavy Duty              | Rated Output Capacity (kVA)  | 2.1                                                                     | 3   | 4.6         | 6.9   | 8.3  | 12.9 | 16.7 |
|                         |                         | Rated Output Current (A)     | 2.1                                                                     | 3   | 4.6         | 6.9   | 8.3  | 13   | 16.8 |
|                         |                         | Applicable Motor Output (kW) | 0.75                                                                    | 1.5 | 2.2         | 3.7   | 3.7  | 7.5  | 7.5  |
|                         |                         | Applicable Motor Output (HP) | 1                                                                       | 2   | 3           | 5     | 5    | 10   | 10   |
| Carrier Frequency (kHz) |                         | 2~15 (default setting 4)     |                                                                         |     |             |       |      |      |      |
| Input                   | Input Current (A)       | Light Duty                   | 3.8                                                                     | 5.4 | 10.4        | 14.9  | 16.9 | 21.3 | 26.3 |
|                         |                         | Normal Duty                  | 3.1                                                                     | 4.5 | 7.2         | 12.3  | 15   | 18   | 22.8 |
|                         |                         | Heavy Duty                   | 2.6                                                                     | 3.8 | 5.8         | 10.7  | 12.5 | 16.9 | 19.7 |
|                         | Rated Voltage/Frequency |                              | 3-Phase 525 V <sub>AC</sub> ~600 V <sub>AC</sub> ( -15%~+10%), 50/60 Hz |     |             |       |      |      |      |
|                         | Operating Voltage Range |                              | 446~660 V <sub>AC</sub>                                                 |     |             |       |      |      |      |
| Frequency Tolerance     |                         | 47~63 Hz                     |                                                                         |     |             |       |      |      |      |
| Efficiency (%)          |                         |                              | 97                                                                      |     |             | 98    |      |      |      |
| Power Factor            |                         |                              | >0.98                                                                   |     |             |       |      |      |      |
| AC Drive Weight (Kg)    |                         |                              | 3±0.3                                                                   |     |             | 4.8±1 |      |      |      |
| Cooling Method          |                         |                              | Natural cooling                                                         |     | Fan cooling |       |      |      |      |
| Braking Chopper         |                         |                              | Built-in                                                                |     |             |       |      |      |      |
| DC Choke                |                         |                              | Optional                                                                |     |             |       |      |      |      |
| EMC Filter              |                         |                              | Optional                                                                |     |             |       |      |      |      |

| 690V                       |                         |                                    |                                                                      |      |      |     |                              |     |        |     |      |      |
|----------------------------|-------------------------|------------------------------------|----------------------------------------------------------------------|------|------|-----|------------------------------|-----|--------|-----|------|------|
| Frame Size                 |                         |                                    | C                                                                    |      |      |     | D                            |     | E      |     |      |      |
| Model VFD-□□□C63B-00 / -21 |                         |                                    | 185                                                                  | 220  | 300  | 370 | 450                          | 550 | 750    | 900 | 1100 | 1320 |
| Output *                   | Light Duty              | Rated Output Capacity (kVA)        | 29                                                                   | 36   | 43   | 54  | 65                           | 80  | 103    | 124 | 149  | 179  |
|                            |                         | Applicable Motor Output (690V, kW) | 18.5                                                                 | 22   | 30   | 37  | 45                           | 55  | 75     | 90  | 110  | 132  |
|                            |                         | Applicable Motor Output (690V, HP) | 25                                                                   | 30   | 40   | 50  | 60                           | 75  | 100    | 125 | 150  | 175  |
|                            |                         | Applicable Motor Output (575V, HP) | 20                                                                   | 25   | 30   | 40  | 50                           | 60  | 75     | 100 | 125  | 150  |
|                            |                         | Rated Output Current (A)           | 24                                                                   | 30   | 36   | 45  | 54                           | 67  | 86     | 104 | 125  | 150  |
|                            | Normal Duty             | Rated Output Capacity (kVA)        | 24                                                                   | 29   | 36   | 43  | 54                           | 65  | 80     | 103 | 124  | 149  |
|                            |                         | Applicable Motor Output (690V, kW) | 15                                                                   | 18.5 | 22   | 30  | 37                           | 45  | 55     | 75  | 90   | 110  |
|                            |                         | Applicable Motor Output (690V, HP) | 20                                                                   | 25   | 30   | 40  | 50                           | 60  | 75     | 100 | 125  | 150  |
|                            |                         | Applicable Motor Output (575V, HP) | 15                                                                   | 20   | 25   | 30  | 40                           | 50  | 60     | 75  | 100  | 125  |
|                            |                         | Rated Output Current (A)           | 20                                                                   | 24   | 30   | 36  | 45                           | 54  | 67     | 86  | 104  | 125  |
|                            | Heavy Duty              | Rated Output Capacity (kVA)        | 17                                                                   | 24   | 29   | 36  | 43                           | 54  | 65     | 80  | 103  | 124  |
|                            |                         | Applicable Motor Output (690V, kW) | 11                                                                   | 15   | 18.5 | 22  | 30                           | 37  | 45     | 55  | 75   | 90   |
|                            |                         | Applicable Motor Output (690V, HP) | 15                                                                   | 20   | 25   | 30  | 40                           | 50  | 60     | 75  | 100  | 125  |
|                            |                         | Applicable Motor Output (575V, HP) | 10                                                                   | 15   | 20   | 25  | 30                           | 40  | 50     | 60  | 75   | 100  |
|                            |                         | Rated Output Current (A)           | 14                                                                   | 20   | 24   | 30  | 36                           | 45  | 54     | 67  | 86   | 104  |
| Carrier Frequency (kHz)    |                         |                                    | 2~9 (default setting 4)                                              |      |      |     |                              |     |        |     |      |      |
| Input                      | Input Current (A)       | Light Duty                         | 29                                                                   | 36   | 43   | 54  | 65                           | 81  | 84     | 102 | 122  | 147  |
|                            |                         | Normal Duty                        | 24                                                                   | 29   | 36   | 43  | 54                           | 65  | 66     | 84  | 102  | 122  |
|                            |                         | Heavy Duty                         | 20                                                                   | 24   | 29   | 36  | 43                           | 54  | 53     | 66  | 84   | 102  |
|                            | Rated Voltage/Frequency |                                    | 3-Phase 525V <sub>AC</sub> ~690V <sub>AC</sub> ( -15%~+10%), 50/60Hz |      |      |     |                              |     |        |     |      |      |
|                            | Operating Voltage Range |                                    | 446~759V <sub>AC</sub>                                               |      |      |     |                              |     |        |     |      |      |
| Frequency Tolerance        |                         | 47~63Hz                            |                                                                      |      |      |     |                              |     |        |     |      |      |
| Efficiency (%)             |                         |                                    | 97                                                                   |      |      |     |                              |     |        |     |      |      |
| Power Factor               |                         |                                    | >0.98                                                                |      |      |     |                              |     |        |     |      |      |
| AC Drive Weight (Kg)       |                         |                                    | 10±1.5                                                               |      |      |     | 39±1.5                       |     | 61±1.5 |     |      |      |
| Cooling Method             |                         |                                    | Fan cooling                                                          |      |      |     |                              |     |        |     |      |      |
| Braking Chopper            |                         |                                    | Frame C (built-in)                                                   |      |      |     | Frame D and above (optional) |     |        |     |      |      |
| DC Choke                   |                         |                                    | Frame C (optional)                                                   |      |      |     | Frame D and above (built-in) |     |        |     |      |      |
| EMC Filter                 |                         |                                    | Optional                                                             |      |      |     |                              |     |        |     |      |      |

\* Parameter 00-16; available load modes: Light Duty (LD), Normal Duty (ND) and Heavy Duty (HD); default setting is LD mode

| 690V                       |                         |                                    |                                                                         |      |         |      |         |       |       |                         |
|----------------------------|-------------------------|------------------------------------|-------------------------------------------------------------------------|------|---------|------|---------|-------|-------|-------------------------|
| Frame Size                 |                         |                                    | F                                                                       |      | G       |      | H       |       |       |                         |
| Model VFD-□□□C63B-00 / -21 |                         |                                    | 1600                                                                    | 2000 | 2500    | 3150 | 4000    | 4500  | 5600  | 6300                    |
| Output *                   | Light Duty              | Rated Output Capacity (kVA)        | 215                                                                     | 263  | 347     | 418  | 494.5   | 534.7 | 678.5 | 776                     |
|                            |                         | Applicable Motor Output (690V, kW) | 160                                                                     | 200  | 250     | 315  | 400     | 450   | 560   | 630                     |
|                            |                         | Applicable Motor Output (690V, HP) | 215                                                                     | 270  | 335     | 425  | 530     | 600   | 745   | 850                     |
|                            |                         | Applicable Motor Output (575V, HP) | 175                                                                     | 200  | 250     | 350  | 400     | 450   | 500   | 745                     |
|                            |                         | Rated Output Current (A)           | 180                                                                     | 220  | 290     | 350  | 430     | 465   | 590   | 675                     |
|                            | Normal Duty             | Rated Output Capacity (kVA)        | 179                                                                     | 215  | 239     | 347  | 402.5   | 442.7 | 534.7 | 776                     |
|                            |                         | Applicable Motor Output (690V, kW) | 132                                                                     | 160  | 200     | 250  | 315     | 355   | 450   | 630                     |
|                            |                         | Applicable Motor Output (690V, HP) | 175                                                                     | 215  | 270     | 335  | 425     | 475   | 600   | 850                     |
|                            |                         | Applicable Motor Output (575V, HP) | 150                                                                     | 175  | 200     | 250  | 350     | 400   | 450   | 745                     |
|                            |                         | Rated Output Current (A)           | 150                                                                     | 180  | 220     | 290  | 350     | 385   | 465   | 675                     |
|                            | Heavy Duty              | Rated Output Capacity (kVA)        | 149                                                                     | 179  | 215     | 263  | 333.5   | 356.5 | 483   | 776                     |
|                            |                         | Applicable Motor Output (690V, kW) | 110                                                                     | 132  | 160     | 200  | 250     | 280   | 400   | 630                     |
|                            |                         | Applicable Motor Output (690V, HP) | 150                                                                     | 175  | 215     | 270  | 335     | 375   | 530   | 850                     |
|                            |                         | Applicable Motor Output (575V, HP) | 125                                                                     | 150  | 175     | 200  | 250     | 335   | 450   | 745                     |
|                            |                         | Rated Output Current (A)           | 125                                                                     | 150  | 180     | 220  | 290     | 310   | 420   | 675                     |
|                            | Carrier Frequency (kHz) |                                    | 2~9 (default setting 4)                                                 |      |         |      |         |       |       | 2~9 (default setting 3) |
| Input                      | Input Current (A)       | Light Duty                         | 178                                                                     | 217  | 292     | 353  | 454     | 469   | 595   | 681                     |
|                            |                         | Normal Duty                        | 148                                                                     | 178  | 222     | 292  | 353     | 388   | 504   | 681                     |
|                            |                         | Heavy Duty                         | 123                                                                     | 148  | 181     | 222  | 292     | 313   | 423   | 681                     |
|                            | Rated Voltage/Frequency |                                    | 3-Phase 525V <sub>AC</sub> ~690V <sub>AC</sub> ( -15% ~ +10%), 50/60 Hz |      |         |      |         |       |       |                         |
|                            | Operating Voltage Range |                                    | 446~759V <sub>AC</sub>                                                  |      |         |      |         |       |       |                         |
|                            | Frequency Tolerance     |                                    | 47~63Hz                                                                 |      |         |      |         |       |       |                         |
| Efficiency (%)             |                         |                                    | 97                                                                      |      | 98      |      |         |       |       |                         |
| Power Factor               |                         |                                    | >0.98                                                                   |      |         |      |         |       |       |                         |
| AC Drive Weight (Kg)       |                         |                                    | 88 ± 1.5                                                                |      | 135 ± 4 |      | 243 ± 5 |       |       |                         |
| Cooling Method             |                         |                                    | Fan cooling                                                             |      |         |      |         |       |       |                         |
| Braking Chopper            |                         |                                    | Frame D and above (optional)                                            |      |         |      |         |       |       |                         |
| DC Choke                   |                         |                                    | Frame D and above (built-in)                                            |      |         |      |         |       |       |                         |
| EMC Filter                 |                         |                                    | Optional                                                                |      |         |      |         |       |       |                         |

\* Parameter 00-16; available load modes: Light Duty (LD), Normal Duty (ND) and Heavy Duty (HD); default setting is LD mode





## General Specifications


|                              |                                           |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
|------------------------------|-------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Control Characteristics      | Control Method                            | Pulse Width Modulated (PWM)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
|                              | Control Mode                              | 230V / 460V model:<br>1: V / F · 2: SVC · 3: VF+PG · 4: FOC+PG · 5: TQC+PG · 6: PM+PG · 7: FOC sensorless · 8: TQC sensorless · 9: PM sensorless<br><br>575V / 690V model:<br>1: V / F · 2: V / F+PG · 3: SVC                                                                                                                                                                                                                                                                                                                                                                                                                       |
|                              | Starting Torque                           | Reach up to 150% or above at 0.5Hz. Under FOC+PG mode, starting torque can reach 150% at 0Hz                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
|                              | V/F Curve                                 | 4-point adjustable V/F curve and square curve                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
|                              | Speed Response Ability                    | 5Hz (vector control can reach up to 40Hz)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
|                              | Torque Limit                              | 230V / 460V model: Normal duty 160%, heavy duty 180% of torque current ;<br>575V / 690V model: Maximum 200% of torque current                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
|                              | Torque Accuracy at TQC Mode               | TQC + PG : ±5%<br>TQC Sensorless : ±15%                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
|                              | Max. Output Frequency (Hz)                | Light Duty / Normal duty: 0.01 ~ 599.00Hz; Heavy duty: 0.00 ~ 300.00Hz                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
|                              | Frequency Output Accuracy                 | Digital command: ±0.01%, -10 ° C ~ +40 ° C, Analog command: ±0.1%, 25 ±10 ° C                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
|                              | Output Frequency Resolution               | Digital command: 0.01 Hz, Analog command: 0.03 * max. output frequency/60Hz (±11 bit)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
|                              | Overload Capacity                         | 230V / 460V model:<br>Normal duty: 120% of rated current can endure for 1 minute during every 5 minutes ;<br>160% of rated current can endure for 3 seconds during every 30 seconds<br>Heavy duty: 150% of rated current can endure for 1 minute during every 5 minutes ;<br>180% of rated current can endure for 3 seconds during every 30 seconds<br><br>575V / 690V model:<br>Light duty: 120% of rated current can endure for 1 minute<br>Normal duty: 120% of rated current can endure for 1 minute, 150% can endure for 3 seconds<br>Heavy duty: 150% of rated current can endure for 1 minute, 180% can endure for 3 seconds |
|                              | Frequency Setting Signal                  | +10V ~ -10V, 0 ~ +10V, 4 ~ 20mA, 0 ~ 20mA, pulse input                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
|                              | Accel./decel. Time                        | 0.00 ~ 600.00 / 0.0 ~ 6000.0 Seconds                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
|                              | Main Control Function                     | Torque control, Speed/torque control switching, Feed forward control, Zero-servo control, Momentary power loss ride thru, Speed search, Over-torque detection, Torque Limit, 16-step speed (Max.), Accel./decel time switch, S-curve accel./decel, 3-wire sequence, Auto-Tuning (rotational, stationary), Dwell, Slip compensation, Torque compensation, JOG frequency, Fault restart, Frequency upper/lower limit settings, DC injection braking at start/stop, High slip braking, Parameter copy PID control (with sleep function), Energy saving control, MODOBUS communication (RS-485 RJ45, Max. 115.2kbps)                    |
|                              | Fan Control                               | 230V model:<br>VFD150C23A (include) and series above: PMW control; VFD110C23A and below: on/off switch control<br>460V model:<br>VFD185C43A (include) and series above: PMW control; VFD150C43A and below: on/off switch control<br>575V / 690V model: PWM control                                                                                                                                                                                                                                                                                                                                                                  |
| Protection Characteristics   | Motor Protection                          | Electronic thermal relay protection                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
|                              | Over-current Protection                   | 230V / 460V model: Over-current protection for 240% of rated current (Normal duty)<br>Current clamp (Normal duty: around 170 ~ 175%); (Heavy duty: around 180 ~ 185%)<br><br>575V / 690V model: Over-current protection for 225% rated current (Normal duty)<br>Current clamp (Light duty: around 128 ~ 141%); (Normal duty: around 170 ~ 175%);<br>(Heavy duty: around 202% ~ 210%)                                                                                                                                                                                                                                                |
|                              | Over-Voltage Protection                   | The C2000 Series will shut down under below conditions:<br>230V: DC bus over 410V; 460V: DC bus over 820V; 575V / 690V: DC bus over 1189V                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
|                              | Over-Temperature Protection               | Built-in temperature sensor                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
|                              | Stall Prevention                          | Stall prevention during acceleration, deceleration and running independently                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
|                              | Restart after Instantaneous Power Failure | Parameter setting up to 20 seconds                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
|                              | Grounding Leakage Current Protection      | Leakage current is higher than 50% of rated current of the AC motor drive                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
|                              | Short-circuit Current Rating (SCCR)       | Per UL508C, the drive is suitable for use on a circuit capable of delivering not more than 100kA symmetrical amperes (rms) when protected by fuses given in the fuse table                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| International Certifications |                                           | CE  EAC                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |

Note: EAC Certification is for 230V and 460V models only

# Wiring

## Wiring Diagram for Frame A ~ C

\*Input: 3-phase power

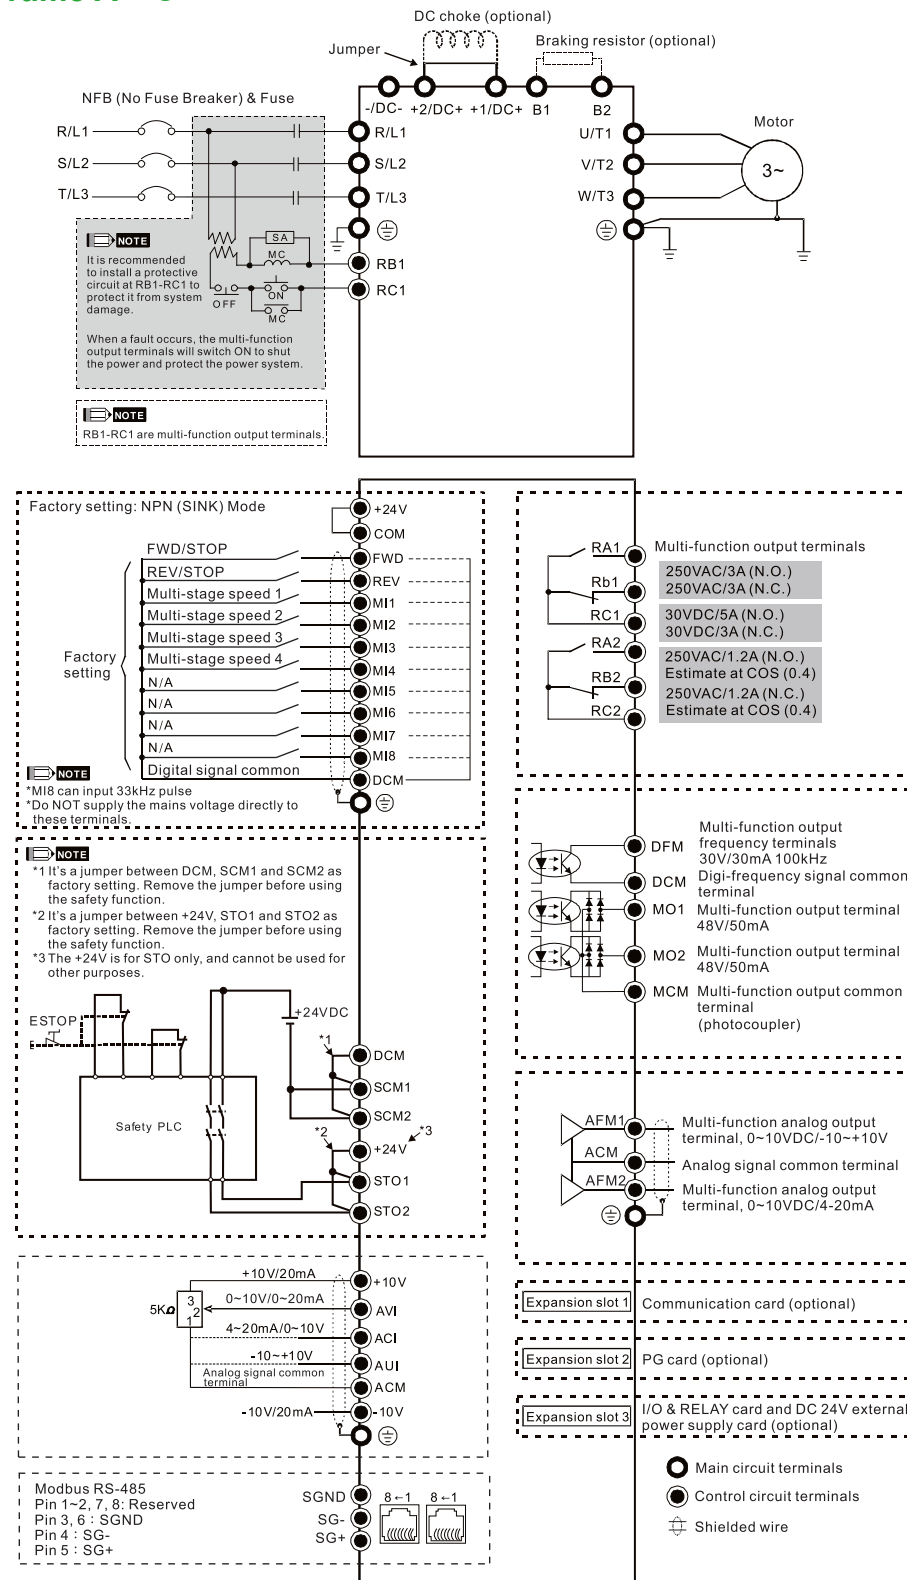


### NOTE

It is not recommended to use a power capacitor or automatic power factor regulator (APFR) at the power input side. If the system requires such a device, please make sure a reactor is installed between the drive and the power capacitor or APFR.


## Wiring Diagram for Frame D ~ F

\*Input: 3-phase power

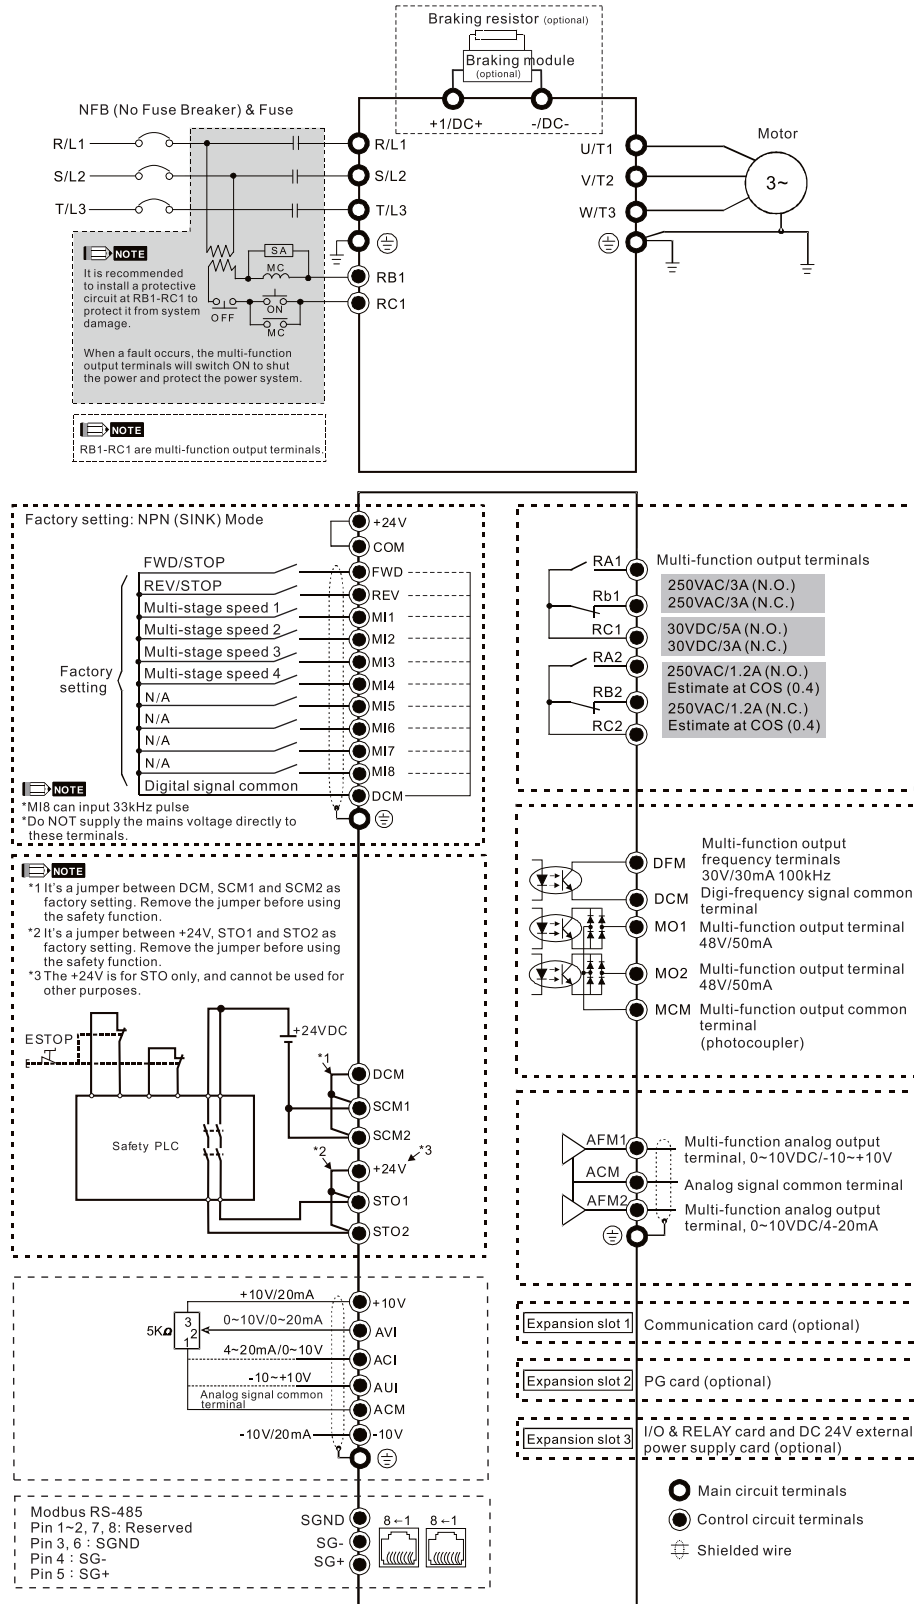

## Wiring Diagram for Frame G ~ H

\*Input: 3-phase power

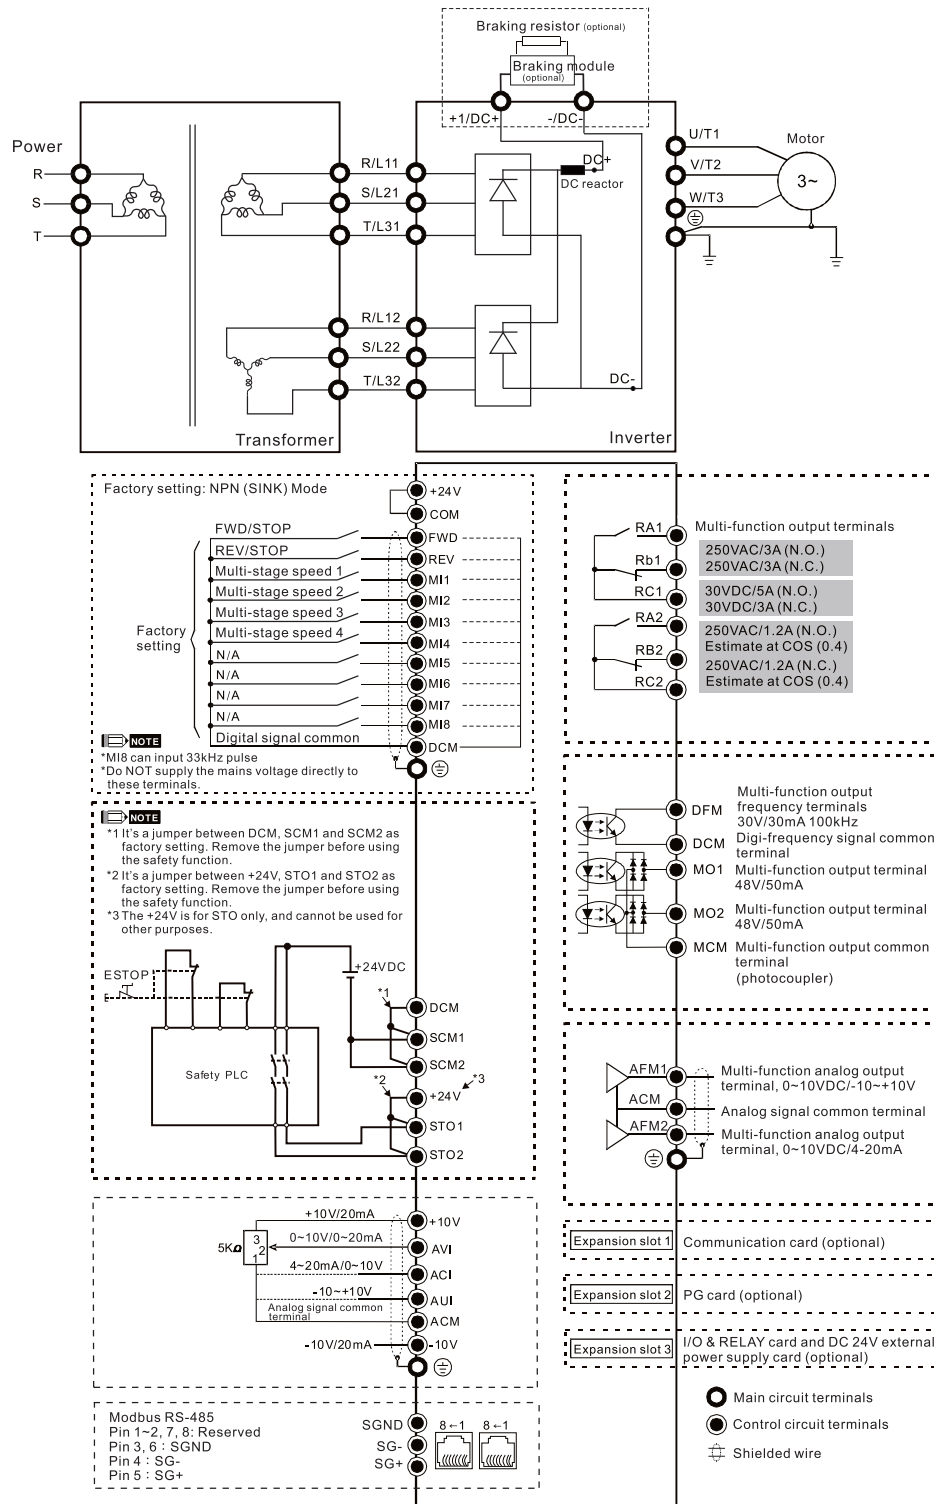


### NOTE

It is not recommended to use a power capacitor or automatic power factor regulator (APFR) at the power input side. If the system requires such a device, please make sure a reactor is installed between the drive and the power capacitor or APFR.

## Dimensions


### Digital Keypad Unit: mm [inch]

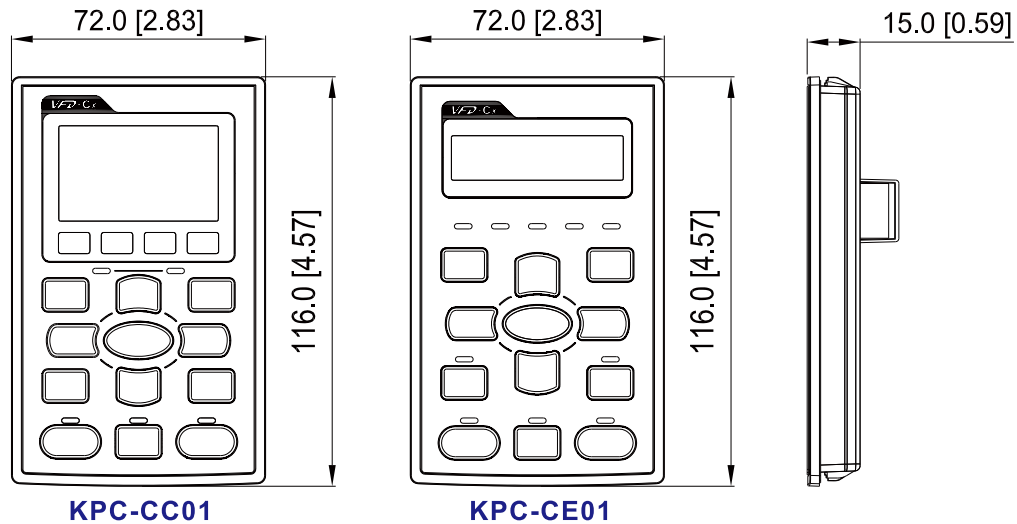

### Frame A

#### MODEL FRAME\_A

VFD007C23A  
VFD015C23A  
VFD022C23A  
VFD037C23A  
VFD007C43A / 43E  
VFD015C43A / 43E  
VFD022C43A / 43E  
VFD037C43A / 43E  
VFD040C43A / 43E  
VFD055C43A / 43E  
VFD015C53A-21  
VFD022C53A-21  
VFD037C53A-21

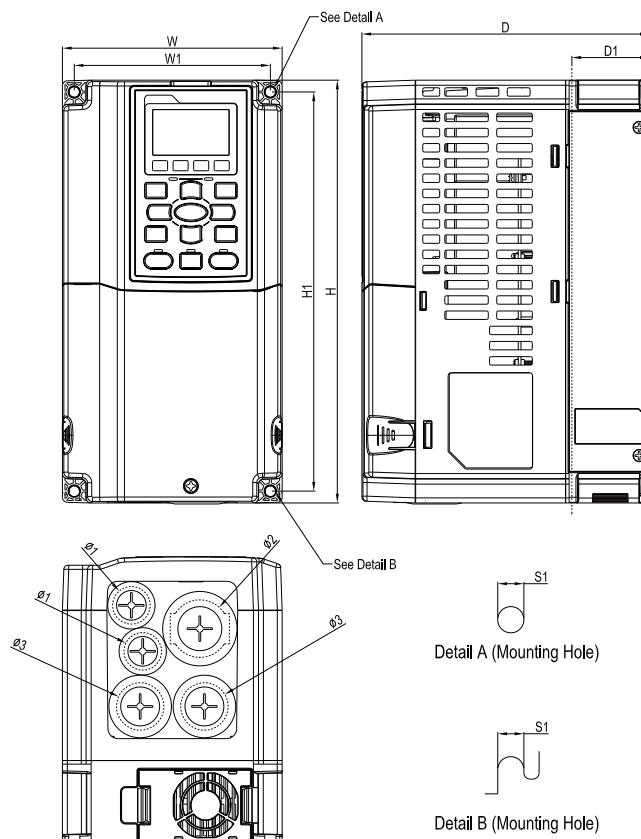


| Frame |      | W     | H     | D     | W1    | H1    | D1*  | Ø    | Ø1   | Ø2   | Ø3   |
|-------|------|-------|-------|-------|-------|-------|------|------|------|------|------|
| A1    | mm   | 130.0 | 250.0 | 170.0 | 116.0 | 236.0 | 45.8 | 6.2  | 22.2 | 34.0 | 28.0 |
|       | inch | 5.12  | 9.84  | 6.69  | 4.57  | 9.29  | 1.80 | 0.24 | 0.87 | 1.34 | 1.10 |

\*D1: Flange mount.

## Frame B

### MODEL

VFD055C23A  
VFD075C23A  
VFD110C23A  
VFD075C43A / 43E  
VFD110C43A / 43E  
VFD150C43A / 43E  
VFD055C53A-21  
VFD075C53A-21  
VFD110C53A-21  
VFD150C53A-21

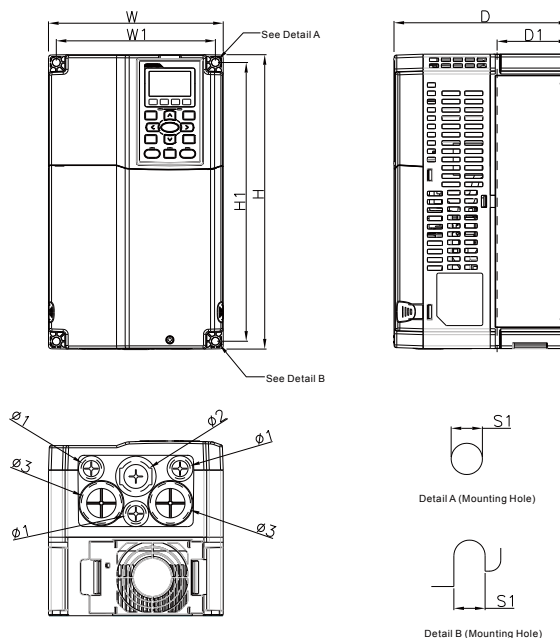


| Frame |      | W     | H     | D     | W1    | H1    | D1*  | S1   | Ø1   | Ø2   | Ø3   |
|-------|------|-------|-------|-------|-------|-------|------|------|------|------|------|
| B1    | mm   | 190.0 | 320.0 | 190.0 | 173.0 | 303.0 | 77.9 | 8.5  | 22.2 | 34.0 | 28.0 |
|       | inch | 7.48  | 12.60 | 7.48  | 6.81  | 11.93 | 3.07 | 0.33 | 0.87 | 1.34 | 1.10 |

\*D1: Flange mount.

## Frame C

### MODEL


VFD150C23A  
VFD185C23A  
VFD220C23A  
VFD185C43A / 43E  
VFD220C43A / 43E  
VFD300C43A / 43E  
VFD185C63B-21  
VFD220C63B-21  
VFD300C63B-21  
VFD370C63B-21

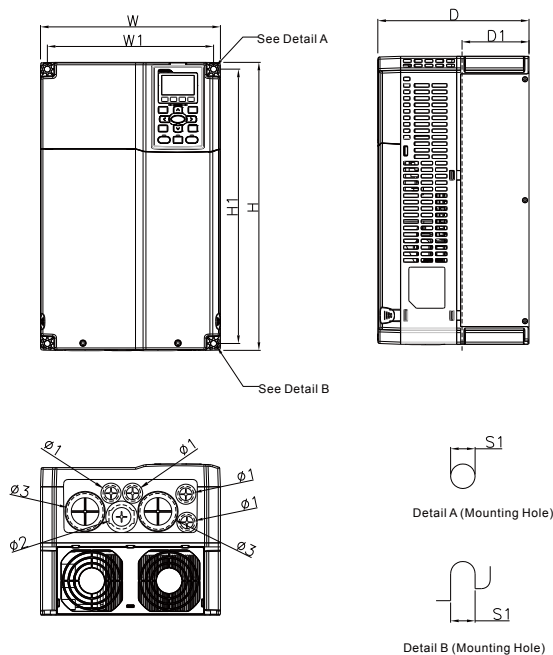

| Frame |      | W     | H     | D     | W1    | H1    | D1*  | S1   | Ø1   | Ø2   | Ø3   |
|-------|------|-------|-------|-------|-------|-------|------|------|------|------|------|
| C1    | mm   | 250.0 | 400.0 | 210.0 | 231.0 | 381.0 | 92.9 | 8.5  | 22.2 | 34.0 | 50.0 |
|       | inch | 9.84  | 15.75 | 8.27  | 9.09  | 15.00 | 3.66 | 0.33 | 0.87 | 1.34 | 1.97 |

\*D1: Flange mount.

**Frame D**

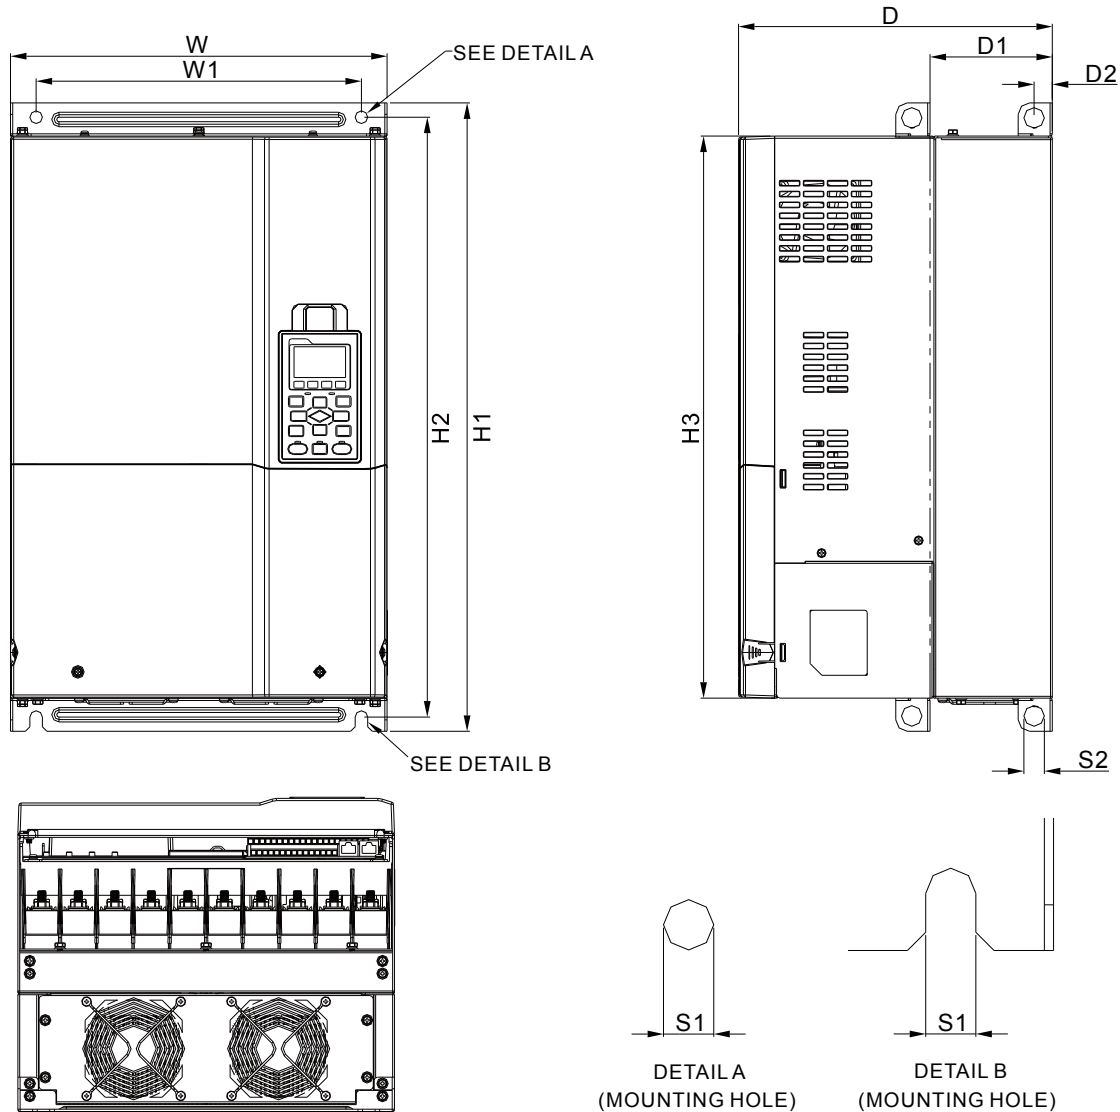


| MODEL         | FRAME_D1 | FRAME_D0-1 |
|---------------|----------|------------|
| VFD300C23A    |          | VFD370C43S |
| VFD370C23A    |          | VFD450C43S |
| VFD550C43A    |          |            |
| VFD750C43A    |          |            |
| VFD450C63B-00 |          |            |
| VFD550C63B-00 |          |            |

| Frame |      | W     | H | D     | W1    | H1    | H2    | H3    | D1*   | D2   | S1   | S2   | Ø1 | Ø2 | Ø3 |
|-------|------|-------|---|-------|-------|-------|-------|-------|-------|------|------|------|----|----|----|
| D1    | mm   | 330.0 | - | 275.0 | 285.0 | 550.0 | 525.0 | 492.0 | 107.2 | 16.0 | 11.0 | 18.0 | -  | -  | -  |
|       | inch | 12.99 | - | 10.83 | 11.22 | 21.65 | 20.67 | 19.37 | 4.22  | 0.63 | 0.43 | 0.71 | -  | -  | -  |
| Frame |      | W     | H | D     | W1    | H1    | H2    | H3    | D1*   | D2   | S1   | S2   |    |    |    |
| D0-1  | mm   | 280.0 | - | 255.0 | 235.0 | 500.0 | 475.0 | 442.0 | 94.2  | 16.0 | 11.0 | 18.0 |    |    |    |
|       | inch | 11.02 | - | 10.04 | 9.25  | 19.69 | 18.70 | 17.40 | 3.71  | 0.63 | 0.43 | 0.71 |    |    |    |

\*D1: Flange mount.

Frame D

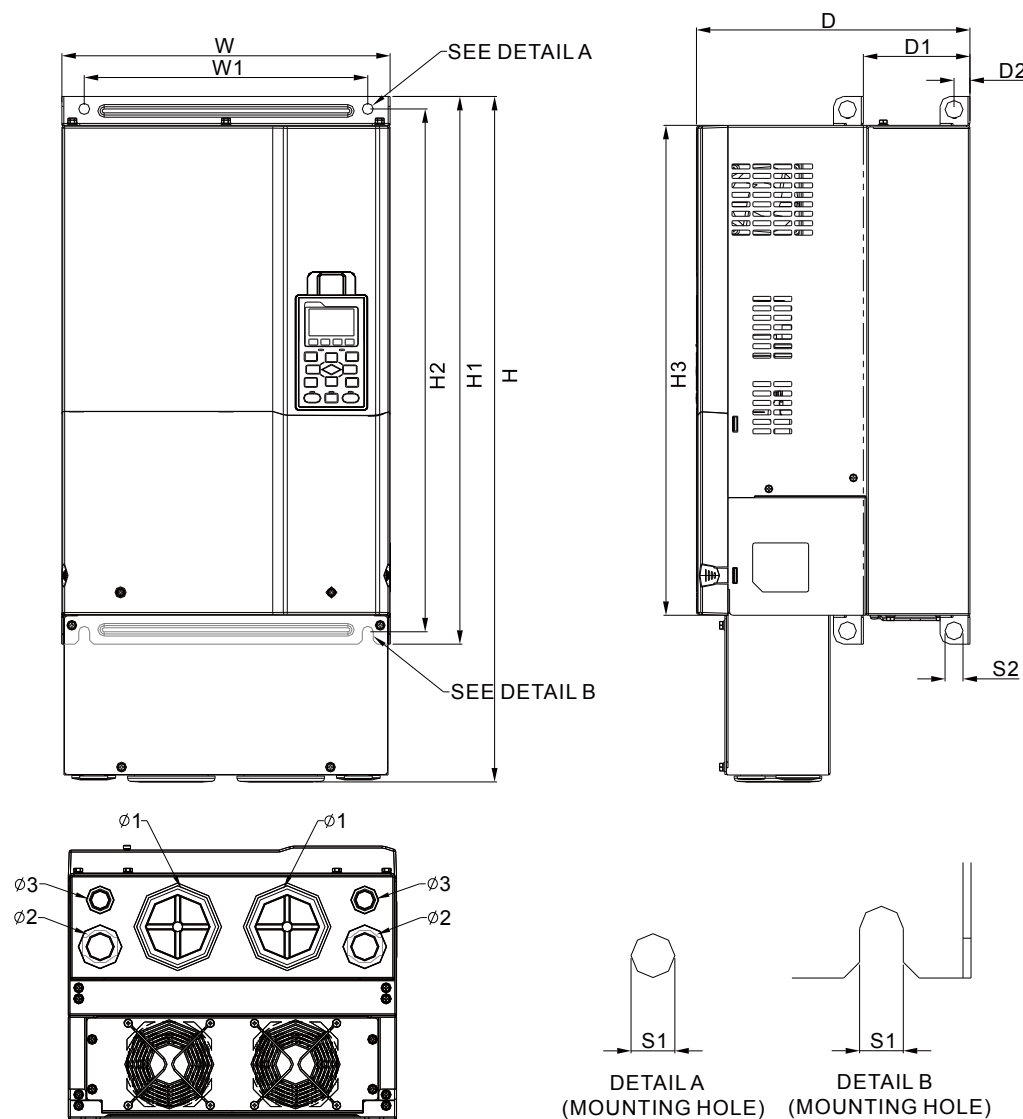


| MODEL         |            |
|---------------|------------|
| FRAME_D2      | FRAME_D0-2 |
| VFD300C23E    | VFD370C43U |
| VFD370C23E    | VFD450C43U |
| VFD550C43E    |            |
| VFD750C43E    |            |
| VFD450C63B-21 |            |
| VFD550C63B-21 |            |

| Frame |      | W     | H     | D     | W1    | H1    | H2    | H3    | D1*   | D2   | S1   | S2   | Ø1   | Ø2   | Ø3   |
|-------|------|-------|-------|-------|-------|-------|-------|-------|-------|------|------|------|------|------|------|
| D2    | mm   | 330.0 | 688.3 | 275.0 | 285.0 | 550.0 | 525.0 | 492.0 | 107.2 | 16.0 | 11.0 | 18.0 | 76.2 | 34.0 | 22.0 |
|       | inch | 12.99 | 27.10 | 10.83 | 11.22 | 21.65 | 20.67 | 19.37 | 4.22  | 0.63 | 0.43 | 0.71 | 3.00 | 1.34 | 0.87 |
| Frame |      | W     | H     | D     | W1    | H1    | H2    | H3    | D1*   | D2   | S1   | S2   | Ø1   | Ø2   | Ø3   |
| D0-2  | mm   | 280.0 | 614.4 | 255.0 | 235.0 | 500.0 | 475.0 | 442.0 | 94.2  | 16.0 | 11.0 | 18.0 | 62.7 | 34.0 | 22.0 |
|       | inch | 11.02 | 21.19 | 10.04 | 9.25  | 19.69 | 18.70 | 17.40 | 3.71  | 0.63 | 0.43 | 0.71 | 2.47 | 1.34 | 0.87 |

\*D1: Flange mount.

**Frame E**

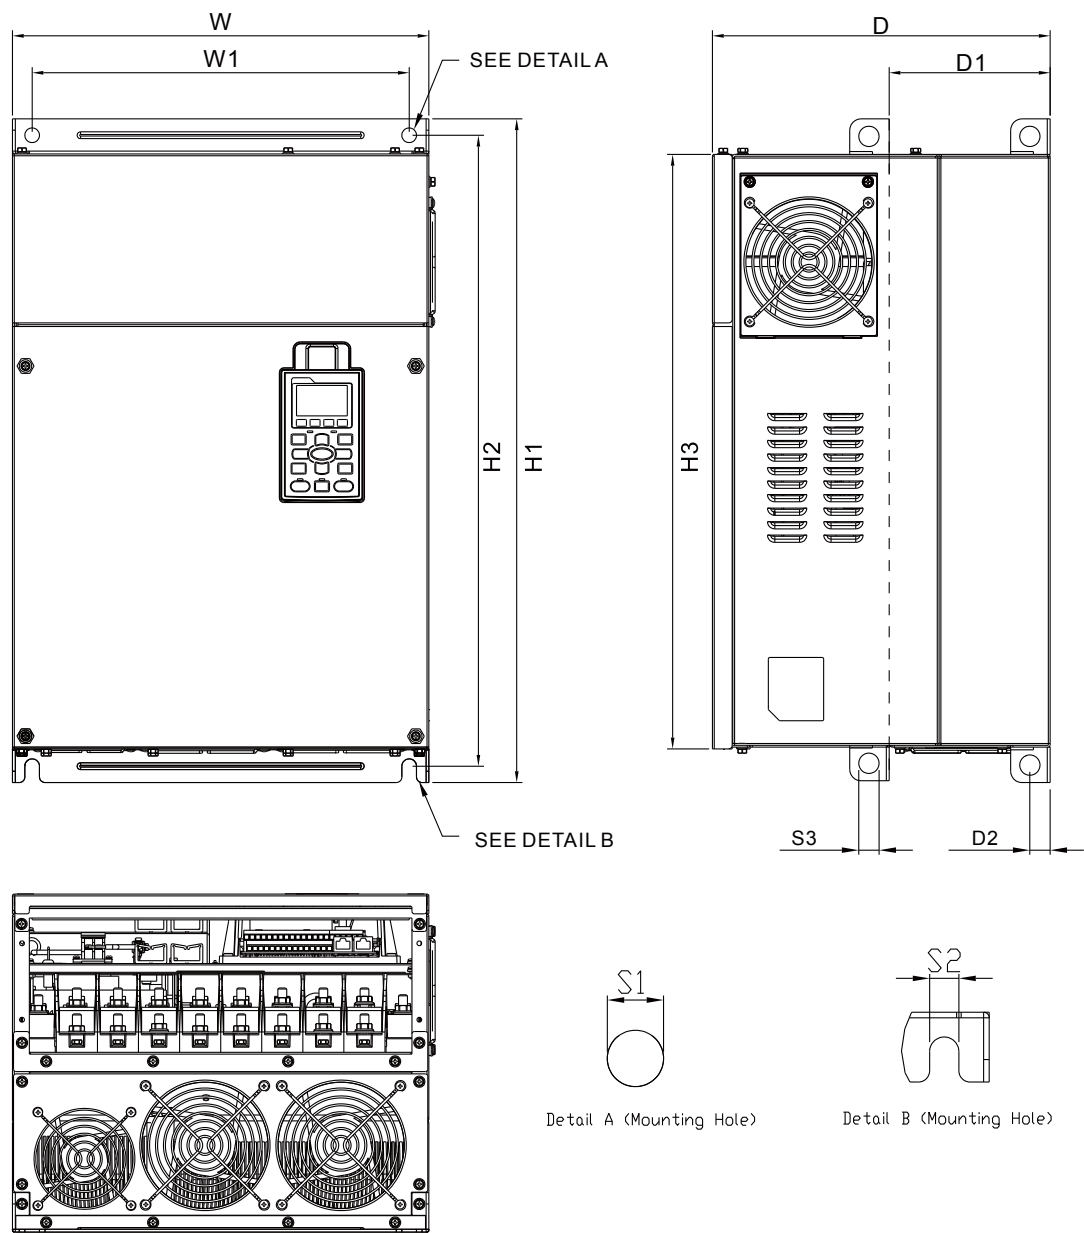


| MODEL<br>FRAME_E1 |                |
|-------------------|----------------|
| VFD450C23A        | VFD750C63B-00  |
| VFD550C23A        | VFD900C63B-00  |
| VFD750C23A        | VFD1100C63B-00 |
| VFD900C43A        | VFD1320C63B-00 |
| VFD1100C43A       |                |

| Frame |      | W     | H | D     | W1    | H1    | H2    | H3    | D1*   | D2   | S1   | S2   | S3   | Ø1 | Ø2 | Ø3 |
|-------|------|-------|---|-------|-------|-------|-------|-------|-------|------|------|------|------|----|----|----|
| E1    | mm   | 370.0 | - | 300.0 | 335.0 | 589   | 560.0 | 528.0 | 143.0 | 18.0 | 13.0 | 13.0 | 18.0 | -  | -  | -  |
|       | inch | 14.57 | - | 11.81 | 13.19 | 23.19 | 22.05 | 20.80 | 5.63  | 0.71 | 0.51 | 0.51 | 0.71 | -  | -  | -  |

\*D1: Flange mount.

**Frame E**

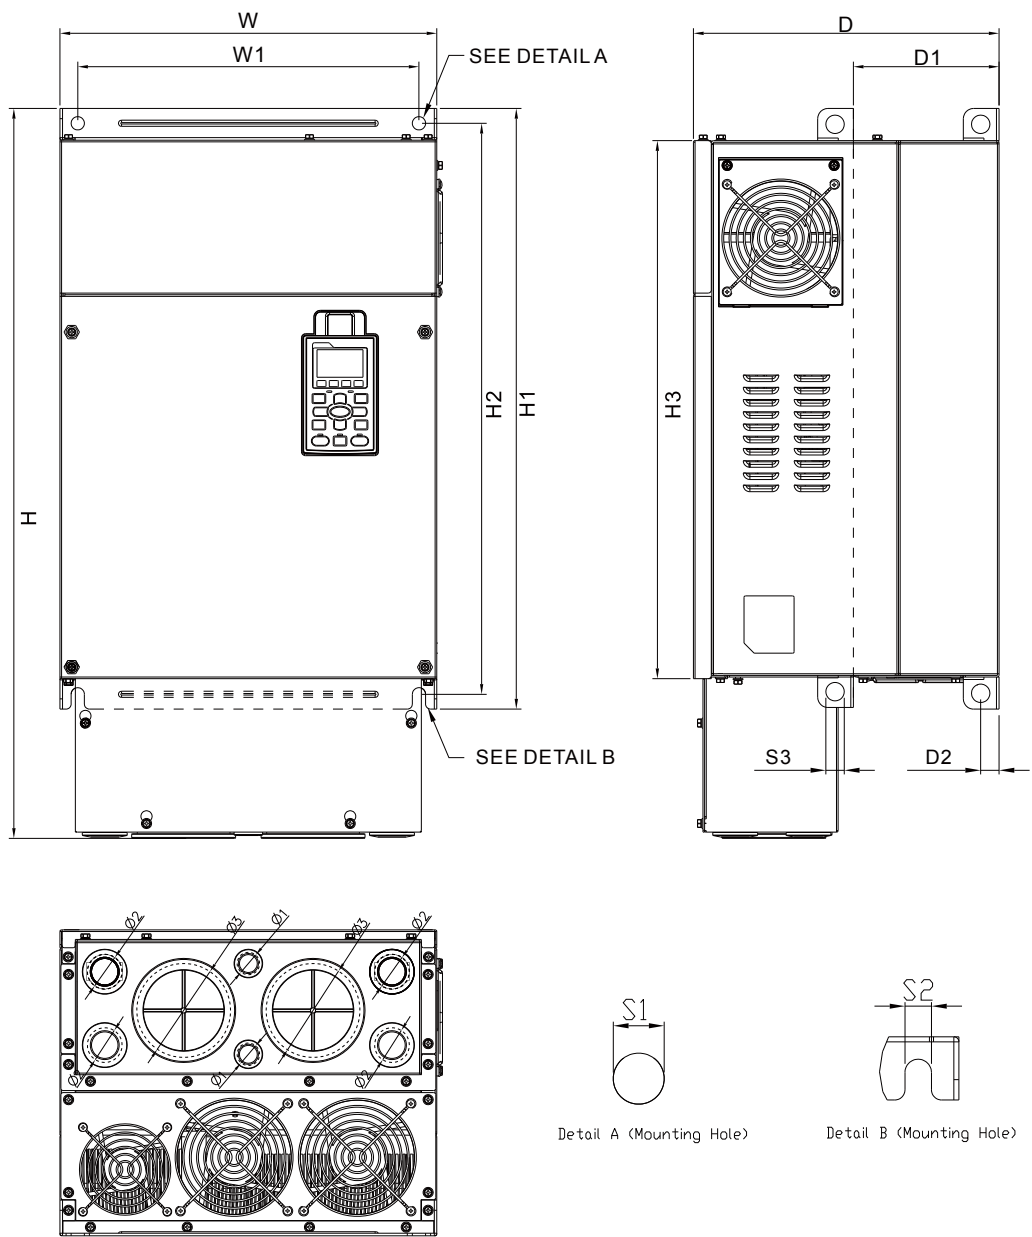


| MODEL<br>FRAME_E2 |                |
|-------------------|----------------|
| VFD450C23E        | VFD750C63B-21  |
| VFD550C23E        | VFD900C63B-21  |
| VFD750C23E        | VFD1100C63B-21 |
| VFD900C43E        | VFD1320C63B-21 |
| VFD1100C43E       |                |

| Frame |      | W     | H     | D     | W1    | H1    | H2    | H3    | D1*   | D2   | S1   | S2   | S3   | Ø1   | Ø2   | Ø3   |
|-------|------|-------|-------|-------|-------|-------|-------|-------|-------|------|------|------|------|------|------|------|
| E2    | mm   | 370.0 | 715.8 | 300.0 | 335.0 | 589.0 | 560.0 | 528.0 | 143.0 | 18.0 | 13.0 | 13.0 | 18.0 | 22.0 | 34.0 | 92.0 |
|       | inch | 14.57 | 28.18 | 11.81 | 13.19 | 23.19 | 22.05 | 20.80 | 5.63  | 0.71 | 0.51 | 0.51 | 0.71 | 0.87 | 1.34 | 3.62 |

\*D1: Flange mount.

**Frame F**

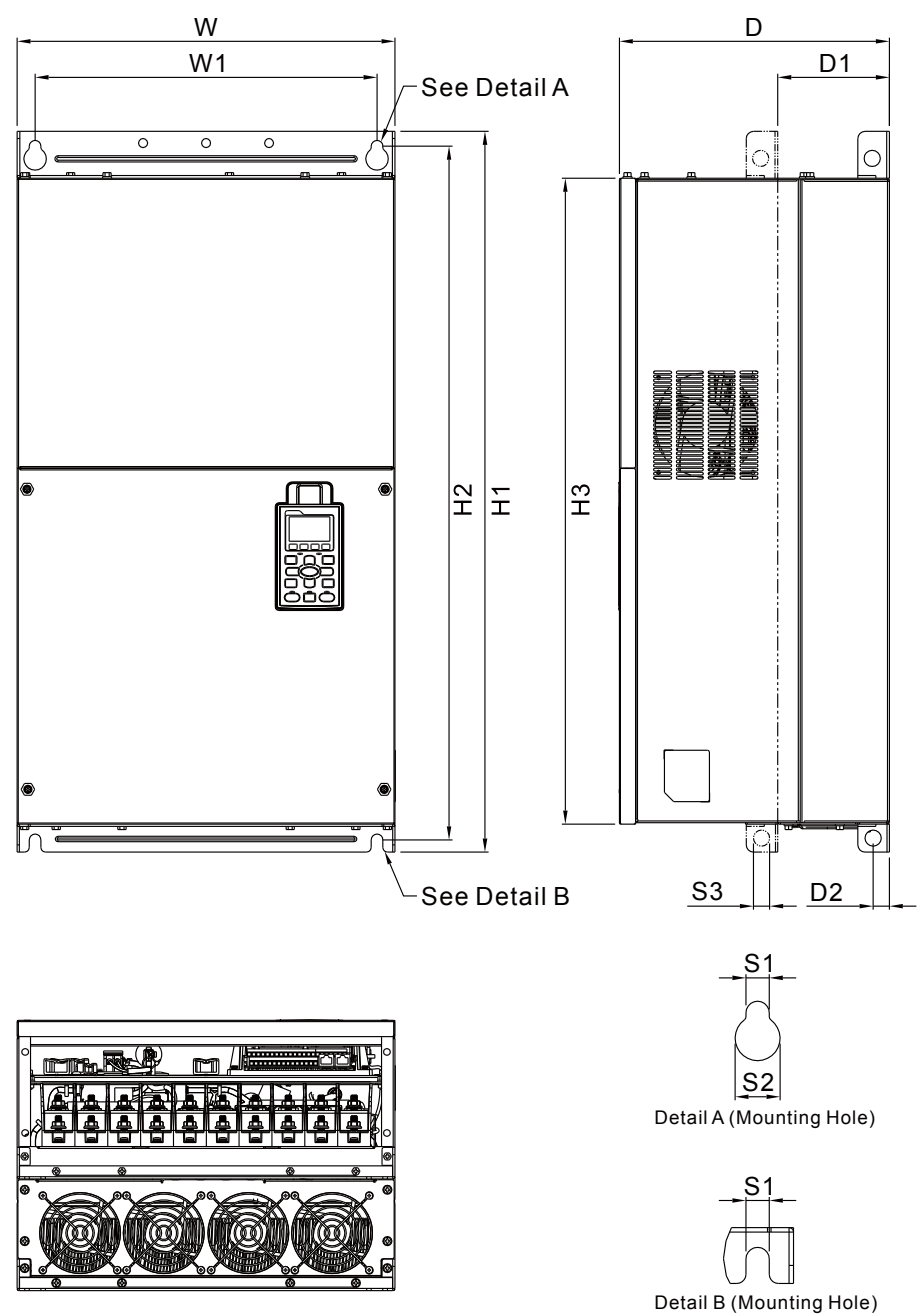


| MODEL          |
|----------------|
| FRAME_F1       |
| VFD900C23A     |
| VFD1320C43A    |
| VFD1600C43A    |
| VFD1600C63B-00 |
| VFD2000C63B-00 |

| Frame |      | W     | H | D     | W1    | H1    | H2    | H3    | D1*   | D2   | S1   | S2   | S3   | Ø1   | Ø2   | Ø3   |
|-------|------|-------|---|-------|-------|-------|-------|-------|-------|------|------|------|------|------|------|------|
| F1    | mm   | 420.0 | - | 300.0 | 380.0 | 800.0 | 770.0 | 717.0 | 124.0 | 18.0 | 13.0 | 25.0 | 18.0 | 92.0 | 35.0 | 22.0 |
|       | inch | 16.54 | - | 11.81 | 14.96 | 31.50 | 30.32 | 28.23 | 4.88  | 0.71 | 0.51 | 0.98 | 0.71 | 3.62 | 1.38 | 0.87 |

\*D1: Flange mount.

**Frame F**

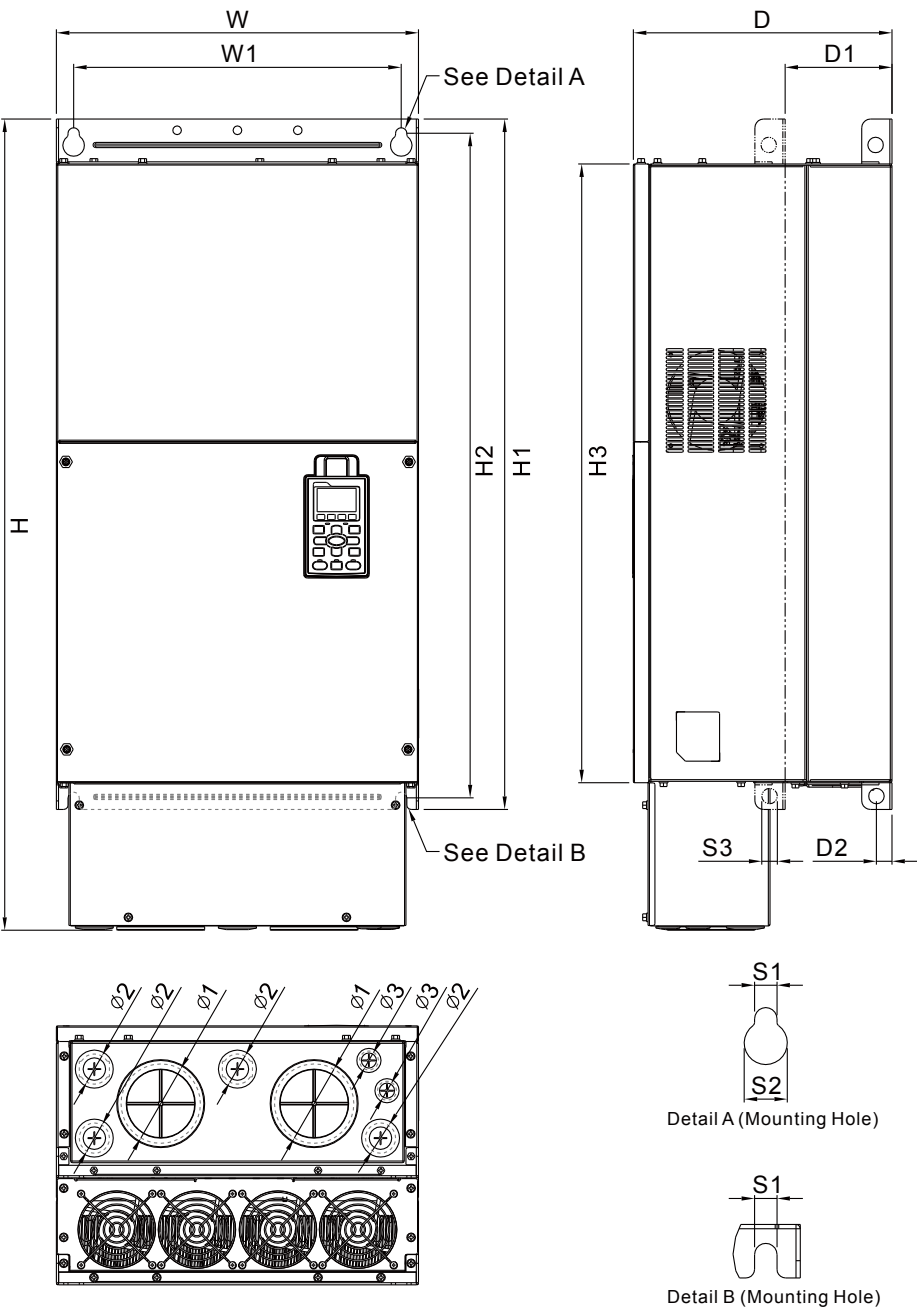


**MODEL**  
**FRAME\_F2**

VFD900C23E  
VFD1320C43E  
VFD1600C43E  
VFD1600C63B-21  
VFD2000C63B-21

| Frame |      | W     | H     | D     | W1    | H1    | H2    | H3    | D1*   | D2   | S1   | S2   | S3   | Ø1   | Ø2   | Ø3   |
|-------|------|-------|-------|-------|-------|-------|-------|-------|-------|------|------|------|------|------|------|------|
| F2    | mm   | 420.0 | 940.0 | 300.0 | 380.0 | 800.0 | 770.0 | 717.0 | 124.0 | 18.0 | 13.0 | 25.0 | 18.0 | 92.0 | 35.0 | 22.0 |
|       | inch | 16.54 | 37.00 | 11.81 | 14.96 | 31.50 | 30.32 | 28.23 | 4.88  | 0.71 | 0.51 | 0.98 | 0.71 | 3.62 | 1.38 | 0.87 |

\*D1: Flange mount.


**Frame G**

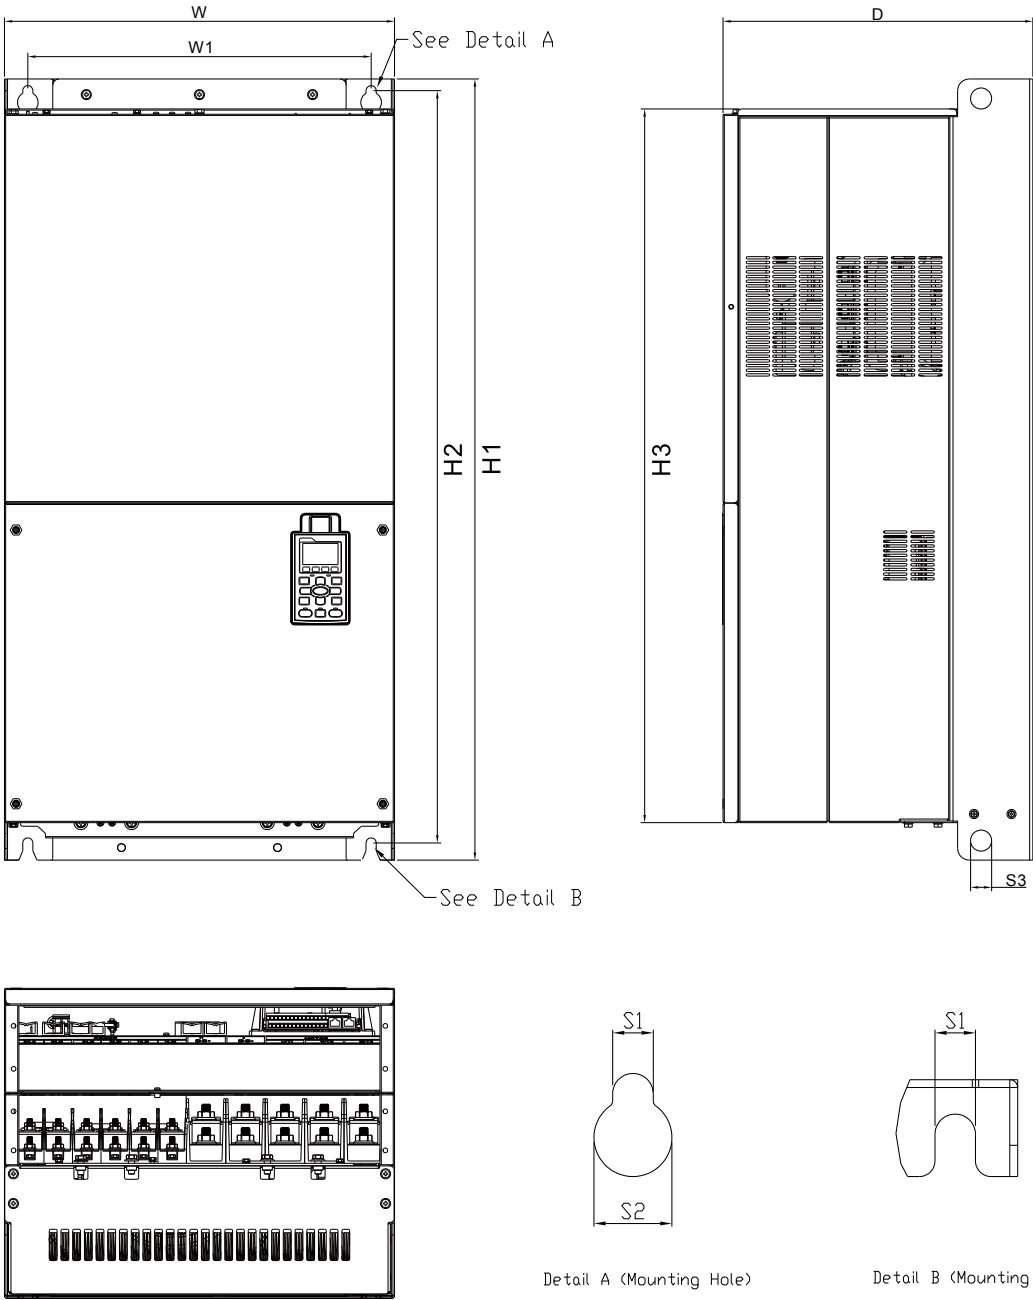

**MODEL**  
**FRAME\_G1**  
 VFD1850C43A  
 VFD2200C43A  
 VFD2500C63B-00  
 VFD3150C63B-00

| Frame |      | W     | H | D     | W1     | H1     | H2    | H3    | S1   | S2   | S3   | Ø1 | Ø2 | Ø3 |
|-------|------|-------|---|-------|--------|--------|-------|-------|------|------|------|----|----|----|
| G1    | mm   | 500.0 | - | 397.0 | 440.0  | 1000.0 | 963.0 | 913.6 | 13.0 | 26.5 | 27.0 | -  | -  | -  |
|       | inch | 19.69 | - | 15.63 | 217.32 | 39.37  | 37.91 | 35.97 | 0.51 | 1.04 | 1.06 | -  | -  | -  |


Frame G

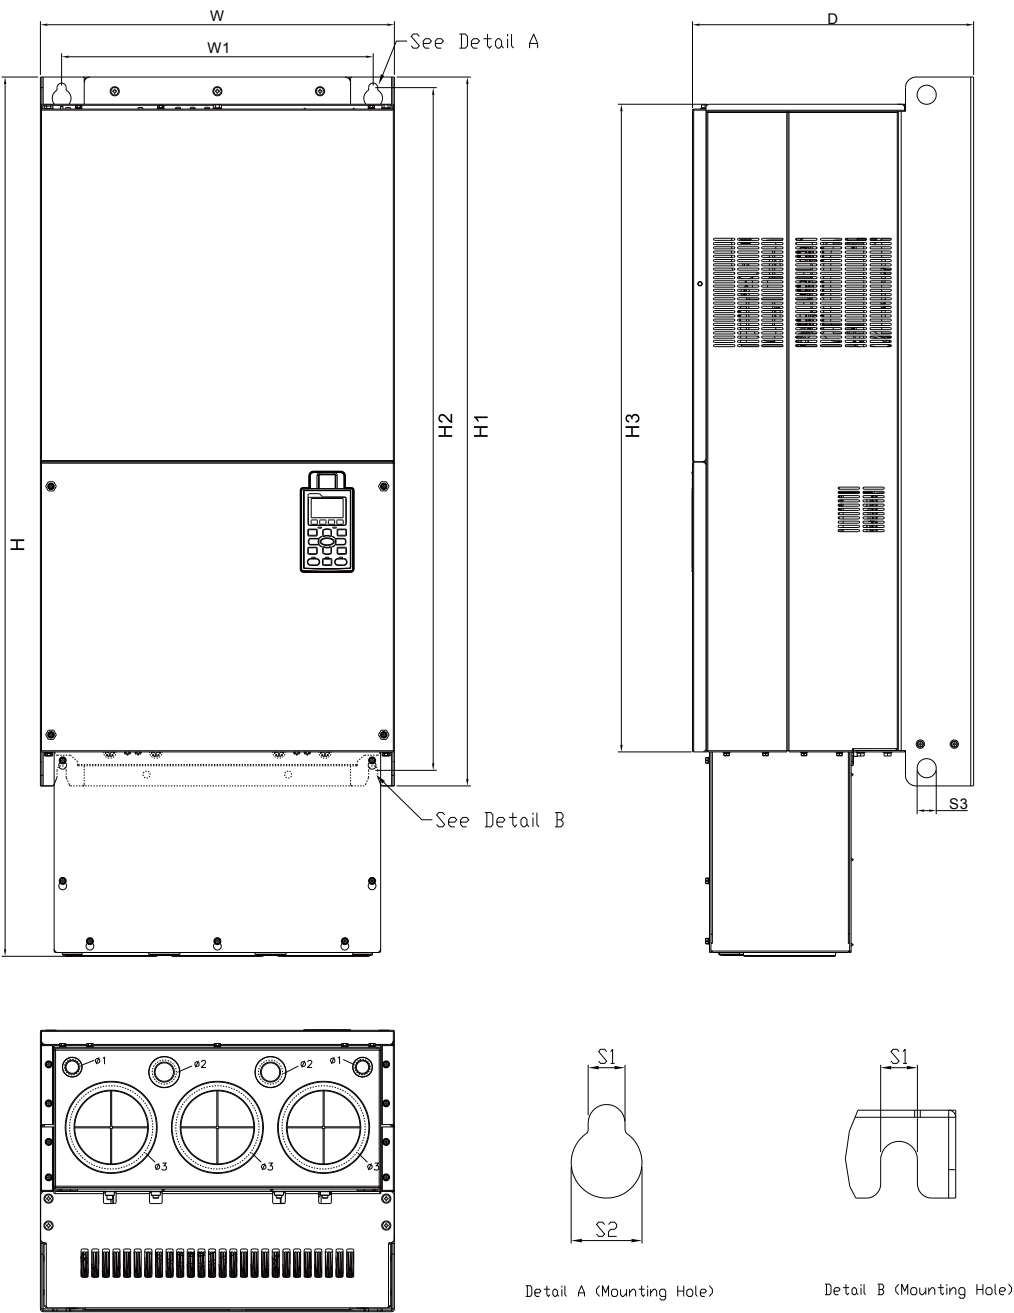

| MODEL          |  |
|----------------|--|
| FRAME_G2       |  |
| VFD1850C43E    |  |
| VFD2200C43E    |  |
| VFD2500C63B-21 |  |
| VFD3150C63B-21 |  |

| Frame |      | W     | H      | D     | W1     | H1     | H2    | H3    | S1   | S2   | S3   | Ø1   | Ø2   | Ø3    |
|-------|------|-------|--------|-------|--------|--------|-------|-------|------|------|------|------|------|-------|
| G2    | mm   | 500.0 | 1240.2 | 397.0 | 440.0  | 1000.0 | 963.0 | 913.6 | 13.0 | 26.5 | 27.0 | 22.0 | 34.0 | 117.5 |
|       | inch | 19.69 | 48.83  | 15.63 | 217.32 | 39.37  | 37.91 | 35.97 | 0.51 | 1.04 | 1.06 | 0.87 | 1.34 | 4.63  |

Frame H1



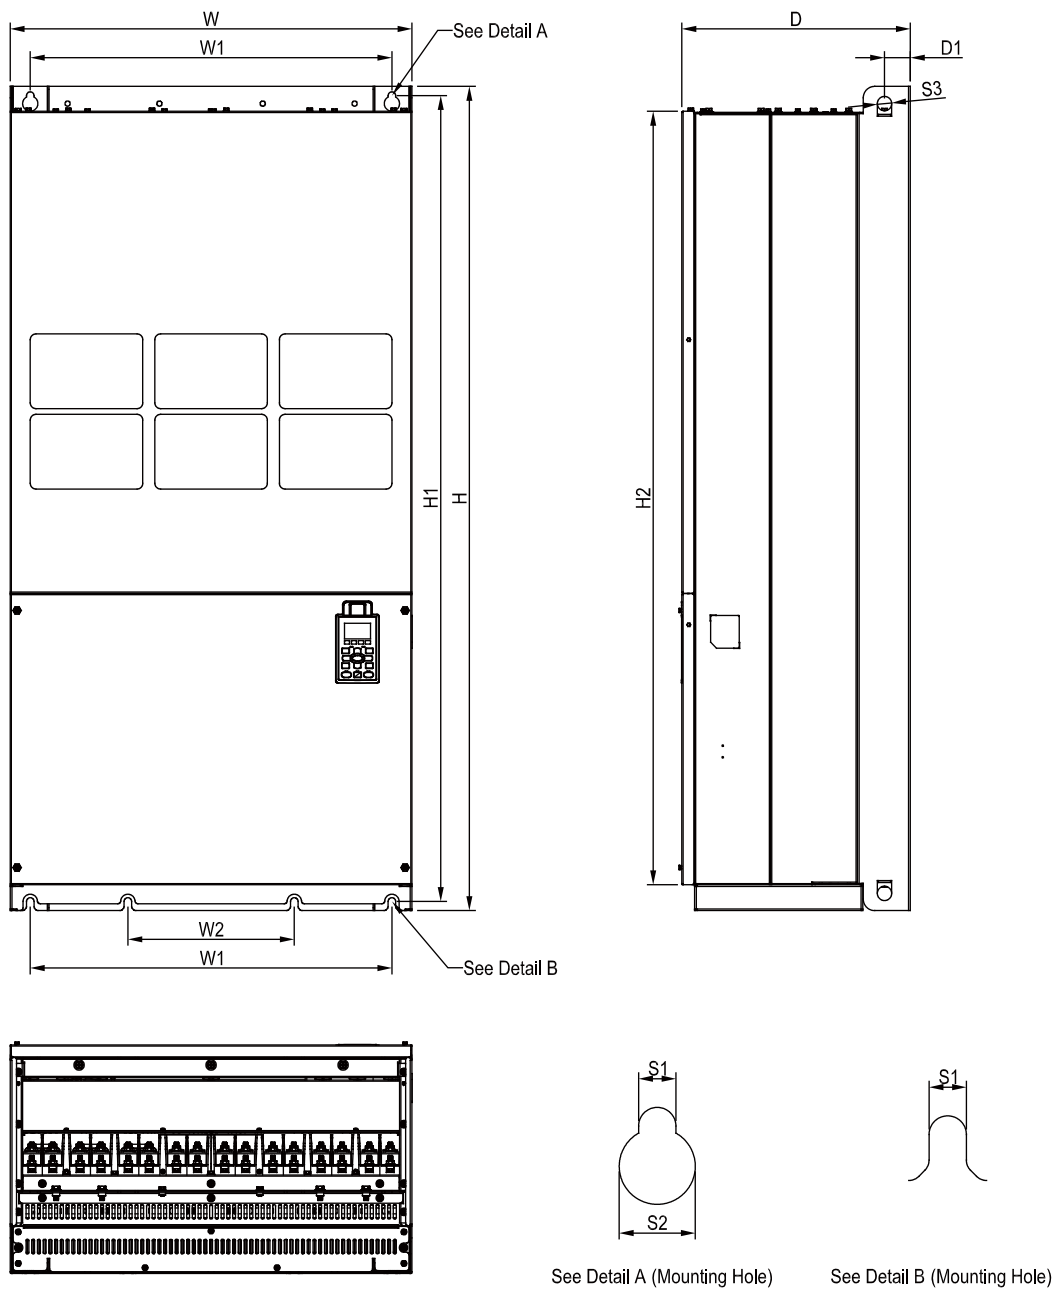


**MODEL**  
**FRAME\_H1**

VFD2800C43A  
VFD3150C43A  
VFD3550C43A  
VFD4500C43A

| Frame |      | W     | H      | D     | W1    | W2    | W3 | W4 | W5   | W6   | H1     | H2     | H3 | H4 |
|-------|------|-------|--------|-------|-------|-------|----|----|------|------|--------|--------|----|----|
| H1    | mm   | 700.0 | 1435.0 | 398.0 | 630.0 | 290.0 | -  | -  | -    | -    | 1403.0 | 1346.6 | -  | -  |
|       | inch | 27.56 | 56.50  | 15.67 | 24.80 | 11.42 | -  | -  | -    | -    | 55.24  | 53.02  | -  | -  |
| Frame |      | H5    | D1     | D2    | D3    | D4    | D5 | D6 | S1   | S2   | S3     | Ø1     | Ø2 | Ø3 |
| H1    | mm   | -     | 45.0   | -     | -     | -     | -  | -  | 13.0 | 26.5 | 25.0   | -      | -  | -  |
|       | inch | -     | 1.77   | -     | -     | -     | -  | -  | 0.51 | 1.04 | 0.98   | -      | -  | -  |




Frame H2

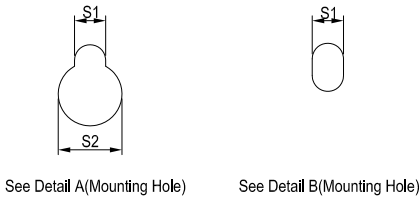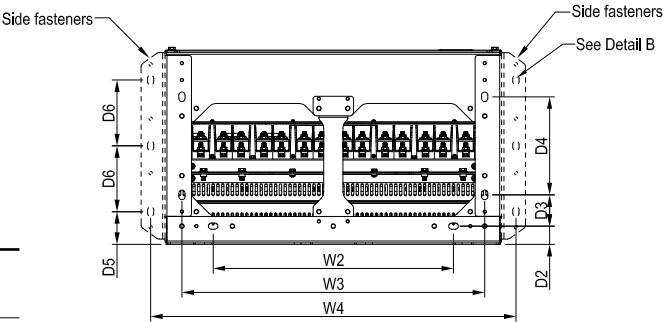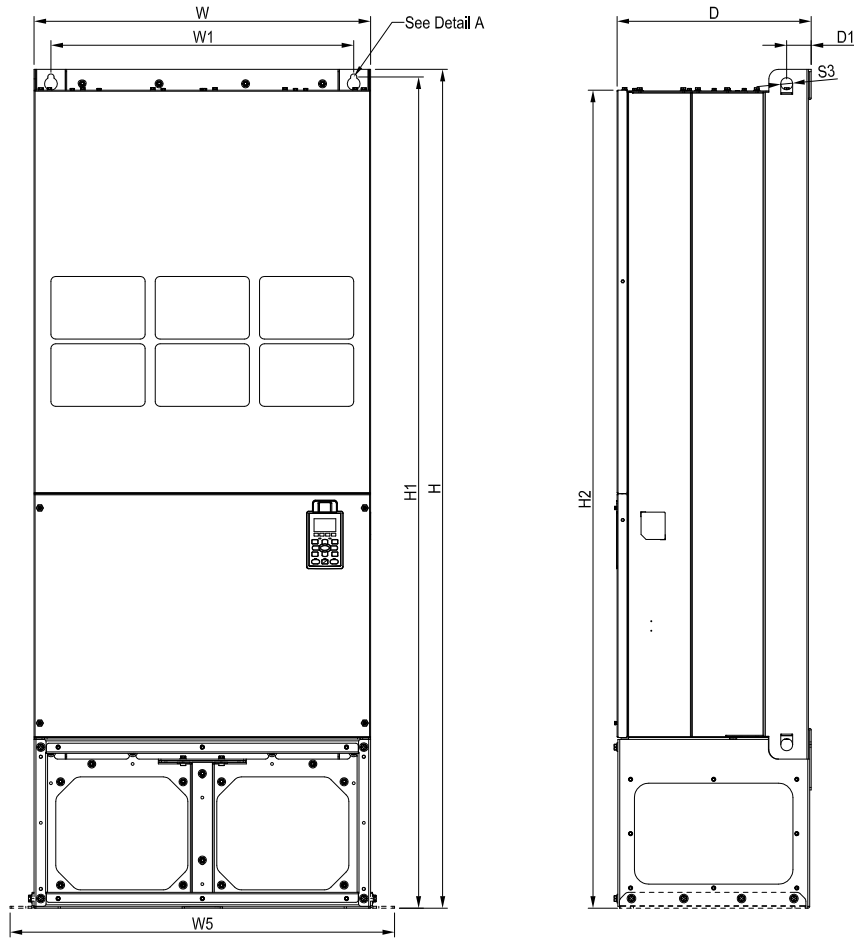

**MODEL**  
**FRAME\_H2**  
VFD2800C43E-1  
VFD3150C43E-1  
VFD3550C43E-1  
VFD4500C43E-1

| Frame |      | W     | H      | D     | W1    | W2    | W3    | W4    | W5    | W6   | H1     | H2     | H3 | H4 |
|-------|------|-------|--------|-------|-------|-------|-------|-------|-------|------|--------|--------|----|----|
| H2    | mm   | 700.0 | 1745.0 | 404.0 | 630.0 | 500.0 | 630.0 | 760.0 | 800.0 | -    | 1729.0 | 1701.6 | -  | -  |
|       | inch | 27.56 | 68.70  | 15.9  | 24.80 | 19.69 | 24.80 | 29.92 | 31.50 | -    | 68.07  | 66.99  | -  | -  |
| Frame |      | H5    | D1     | D2    | D3    | D4    | D5    | D6    | S1    | S2   | S3     | Ø1     | Ø2 | Ø3 |
| H2    | mm   | -     | 51.0   | 38.0  | 65.0  | 204.0 | 68.0  | 137.0 | 13.0  | 26.5 | 25.0   | -      | -  | -  |
|       | inch | -     | 2.0    | 1.50  | 2.56  | 8.03  | 2.68  | 5.4   | 0.51  | 1.04 | 0.98   | -      | -  | -  |


Frame H3

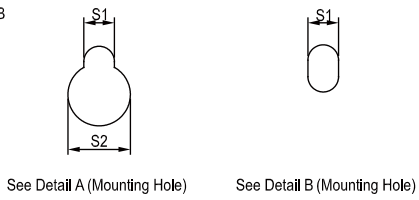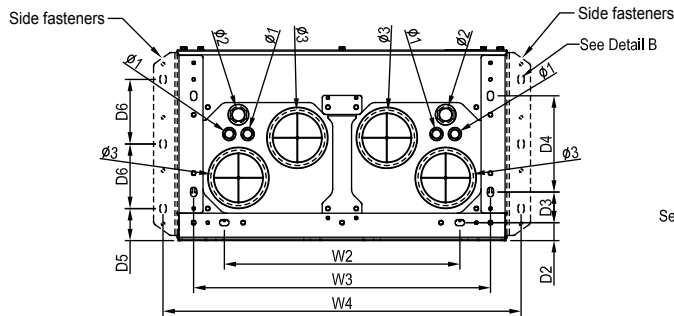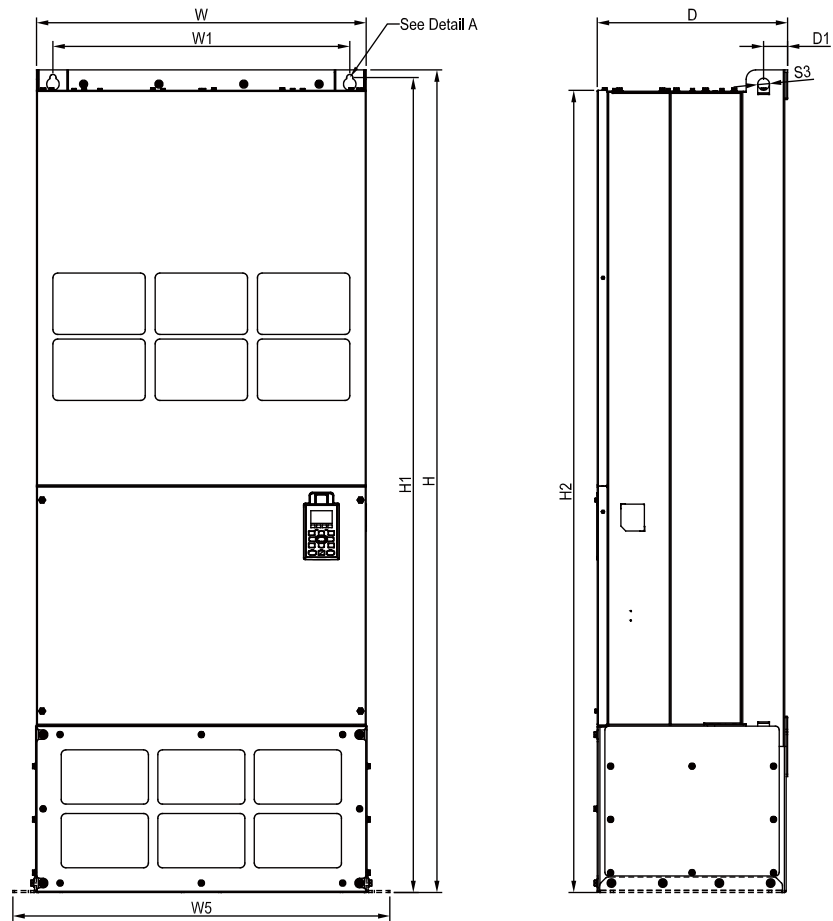

**MODEL**  
**FRAME\_H3**  
VFD2800C43E  
VFD3150C43E  
VFD3550C43E  
VFD4500C43E

| Frame |      | W     | H      | D     | W1    | W2    | W3    | W4    | W5    | W6   | H1     | H2     | H3   | H4    |
|-------|------|-------|--------|-------|-------|-------|-------|-------|-------|------|--------|--------|------|-------|
| H3    | mm   | 700.0 | 1745.0 | 404.0 | 630.0 | 500.0 | 630.0 | 760.0 | 800.0 | -    | 1729.0 | 1701.6 | -    | -     |
|       | inch | 27.56 | 68.70  | 15.9  | 24.80 | 19.69 | 24.80 | 29.92 | 31.50 | -    | 68.07  | 66.99  | -    | -     |
| Frame |      | H5    | D1     | D2    | D3    | D4    | D5    | D6    | S1    | S2   | S3     | Ø1     | Ø2   | Ø3    |
| H3    | mm   | -     | 51.0   | 38.0  | 65.0  | 204.0 | 68.0  | 137.0 | 13.0  | 26.5 | 25.0   | 22.0   | 34.0 | 117.5 |
|       | inch | -     | 2.0    | 1.50  | 2.56  | 8.03  | 2.68  | 5.4   | 0.51  | 1.04 | 0.98   | 0.87   | 1.34 | 4.63  |

690 V Frame H1

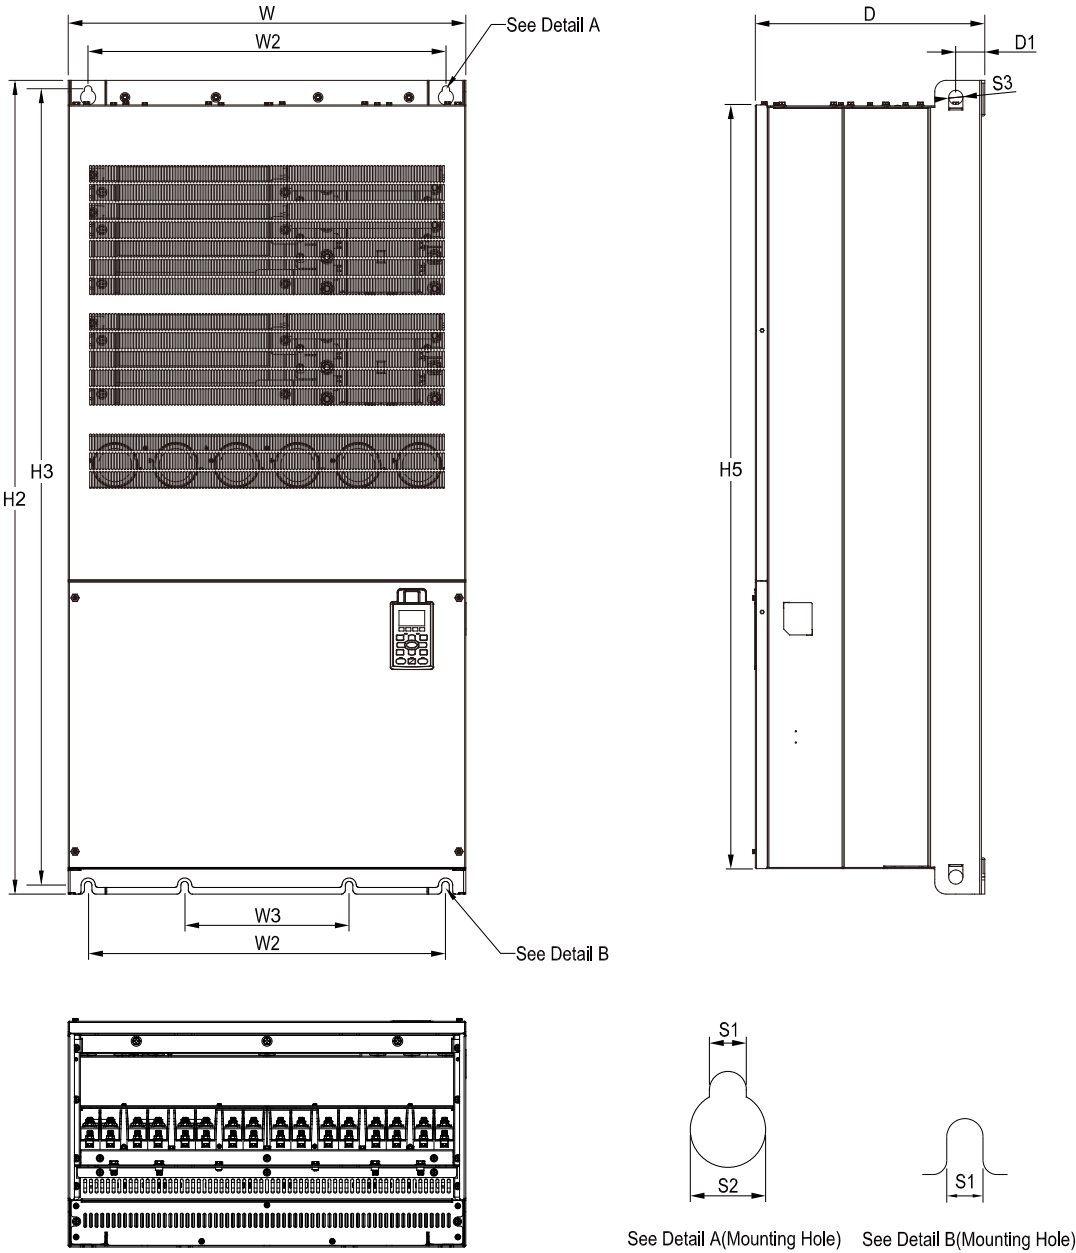


MODEL  
690V FRAME\_H1

VFD4000C63B-00  
VFD4500C63B-00  
VFD5600C63B-00  
VFD6300C63B-00

| Frame |      | W      | H    | D     | W1 | W2    | W3    | W4 | W5   | W6   | H1   | H2     | H3     | H4 |
|-------|------|--------|------|-------|----|-------|-------|----|------|------|------|--------|--------|----|
| H1    | mm   | 700.0  | -    | 398.0 | -  | 630.0 | 290.0 | -  | -    | -    | -    | 1435.0 | 1403.0 | -  |
|       | inch | 27.56  | -    | 15.67 | -  | 24.80 | 11.42 | -  | -    | -    | -    | 56.50  | 55.24  | -  |
| Frame |      | H5     | D1   | D2    | D3 | D4    | D5    | D6 | S1   | S2   | S3   | Ø1     | Ø2     | Ø3 |
| H1    | mm   | 1346.6 | 45.0 | -     | -  | -     | -     | -  | 13.0 | 26.5 | 25.0 | -      | -      | -  |
|       | inch | 53.02  | 1.77 | -     | -  | -     | -     | -  | 0.51 | 1.04 | 0.98 | -      | -      | -  |

690 V Frame H2

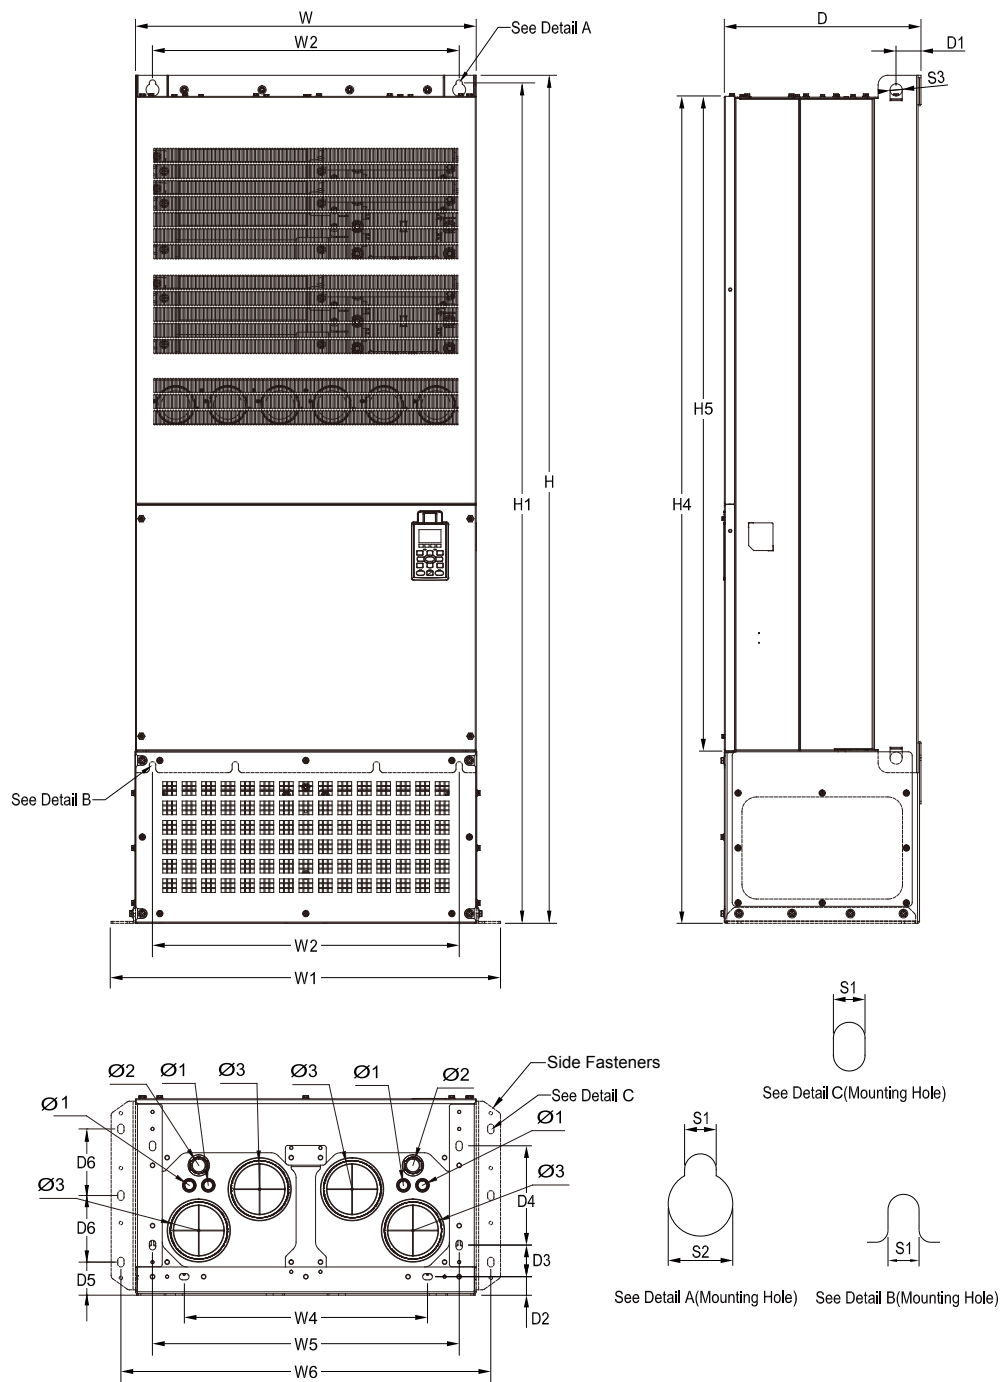

MODEL  
690V FRAME\_H2

VFD4000C63B-21  
VFD4500C63B-21  
VFD5600C63B-21  
VFD6300C63B-21

| Frame |      | W      | H      | D     | W1    | W2    | W3   | W4    | W5    | W6    | H1     | H2   | H3   | H4     |
|-------|------|--------|--------|-------|-------|-------|------|-------|-------|-------|--------|------|------|--------|
| H2    | mm   | 700.0  | 1745.0 | 404.0 | 800.0 | 630.0 | -    | 500.0 | 630.0 | 760.0 | 1729.0 | -    | -    | 1701.6 |
|       | inch | 27.56  | 68.70  | 15.91 | 31.50 | 24.80 | -    | 19.69 | 24.80 | 29.92 | 68.07  | -    | -    | 66.99  |
| Frame |      | H5     | D1     | D2    | D3    | D4    | D5   | D6    | S1    | S2    | S3     | Ø1   | Ø2   | Ø3     |
| H2    | mm   | 1346.6 | 51.0   | 38.0  | 65.0  | 204.0 | 68.0 | 137.0 | 13.0  | 26.5  | 25.0   | 22.0 | 34.0 | 117.5  |
|       | inch | 53.02  | 2.01   | 1.50  | 2.56  | 8.03  | 2.68 | 5.39  | 0.51  | 1.04  | 0.98   | 0.87 | 1.34 | 4.63   |

# Accessories

## ■ EMC-PG01L / EMC-PG02L

|                                                                                                                      | Terminals | Description                                                                                                                                                                                                                                                                                                                                                                |
|----------------------------------------------------------------------------------------------------------------------|-----------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|  <p>Set by<br/>Pr.10-00 ~ 10-02</p> | PG1       | VP<br>Output voltage for power: +5V/+12V ± 5% (use FSW3 to switch +5V/+12V)<br>Max. output current: 200 mA                                                                                                                                                                                                                                                                 |
|                                                                                                                      |           | DCM<br>Common for power and signal                                                                                                                                                                                                                                                                                                                                         |
|                                                                                                                      |           | A1, /A1,<br>B1, /B1, Z1, /Z1<br>Encoder input signal (Line Driver)<br>Open collector input: +5 V / +24 V (Note1)<br>1-phase or 2-phase input<br>Max. input frequency: EMC-PG01L: 300KHz; EMC-PG02L: 30KHz                                                                                                                                                                  |
|                                                                                                                      | PG2       | A2, /A2,<br>B2, /B2<br>Pulse input signal (Line Driver or Open Collector)<br>Open collector input: +5V/+24 V (Note1)<br>1-phase or 2-phase input<br>Max. input frequency: EMC-PG01L: 300KHz; EMC-PG02L: 30KHz                                                                                                                                                              |
|                                                                                                                      | PG OUT    | AO, /AO,<br>BO, /BO,<br>ZO, /ZO, SG<br>PG card output signals. Division frequency function: 1 ~ 255 times<br>Max. output voltage for Line driver: 5V <sub>DC</sub><br>Max. output current: 50 mA<br>Max. output frequency: EMC-PG01L: 300KHz; EMC-PG02L: 30KHz<br>SG: The GND of PG card is the same as the host controller or PLC, so a common output signal is attained. |
|                                                                                                                      |           |                                                                                                                                                                                                                                                                                                                                                                            |

## ■ EMC-PG01O / EMC-PG02O

|                                                                                                                        | Terminals | Description                                                                                                                                                                                                                                                                                                                                      |
|------------------------------------------------------------------------------------------------------------------------|-----------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|  <p>Set by<br/>Pr.10-00 ~ 10-02</p> | PG1       | VP<br>Output voltage for power: +5V/+12V ± 5% (use FSW3 to switch +5V/+12V)<br>Max. output current: 200 mA                                                                                                                                                                                                                                       |
|                                                                                                                        |           | DCM<br>Common for power and signal                                                                                                                                                                                                                                                                                                               |
|                                                                                                                        |           | A1, /A1, B1, /B1,<br>Z1, /Z1<br>Encoder input signal (Line Driver or Open Collector)<br>Open collector input: +5V/+24 V (Note1)<br>1-phase or 2-phase input<br>Max. input frequency: EMC-PG01O: 300KHz; EMC-PG02O: 30KHz                                                                                                                         |
|                                                                                                                        | PG2       | A2, /A2,<br>B2, /B2<br>Pulse input signal (Line Driver or Open Collector)<br>Open collector input: +5V/+24 V (Note1)<br>1-phase or 2-phase input<br>Max. input frequency: EMC-PG01O: 300KHz; EMC-PG02O: 30KHz                                                                                                                                    |
|                                                                                                                        | PG OUT    | V+, /V-<br>Needs external power source for PG OUT circuit.<br>Input voltage of power: +12V ~ +24V                                                                                                                                                                                                                                                |
|                                                                                                                        |           | V-<br>Negative power supply input                                                                                                                                                                                                                                                                                                                |
|                                                                                                                        |           | A/O, B/O, Z/O<br>PG card output signals. Division frequency function: 1 ~ 255 times<br>Add a pull-up resistor to the open collector output signals to avoid signal interferences.<br>[Three pull-up resistors are included in the package (1.8KΩ/1W)]<br>Max. Output current: 20 mA<br>Max output frequency: EMC-PG01O: 300KHz; EMC-PG02O: 30KHz |

## ■ EMC-PG01R

|                                                                                                                        | Terminals | Description                                                                                                                                                                                                                                                                                                                                    |
|------------------------------------------------------------------------------------------------------------------------|-----------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|  <p>Set by<br/>Pr.10-00 ~ 10-02</p> | PG1       | R1- R2<br>Resolver output power 7 Vrms, 10 kHz                                                                                                                                                                                                                                                                                                 |
|                                                                                                                        |           | S1, S2, S3, S4<br>Resolver input signal 3.5 ± 0.175 Vrms, 10 kHz                                                                                                                                                                                                                                                                               |
|                                                                                                                        | PG2       | A2, /A2, B2, /B2<br>Pulse input signal (Line Driver or Open Collector)<br>Open collector input: +5V/+24 V (Note1)<br>1-phase or 2-phase input; Max. input frequency: 300 KHz                                                                                                                                                                   |
|                                                                                                                        | PG OUT    | AO, /AO,<br>BO, /BO,<br>ZO, /ZO, SG<br>PG card output signals. Division frequency function: 1 ~ 255 times<br>Max. output voltage for Line driver: 5V <sub>DC</sub><br>Max. output current: 50 mA<br>Max. output frequency: 300 KHz<br>SG: The GND of PG card is the same as the host controller or PLC, so a common output signal is attained. |

## ▪ EMC-PG01U / EMC-PG02U

**FJMP1** : Standard UVW Output Encoder; : Delta Encoder

| <br>Set by<br>Pr.10-00 ~ 10-02 | Terminals |                               | Description                                                                                                                                                                                                                                                                                                 |
|-----------------------------------------------------------------------------------------------------------------|-----------|-------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|                                                                                                                 | PG1       | VP                            | Output voltage for power: +5 V/+12 V $\pm$ 5% (use FSW3 to switch +5 V/+12 V)<br>Max. output current: 200 mA                                                                                                                                                                                                |
|                                                                                                                 |           | DCM                           | Common for power and signal                                                                                                                                                                                                                                                                                 |
|                                                                                                                 |           | A1, /A1, B1, /B1, Z1, /Z1     | Encoder input signal (Line Driver)<br>1-phase or 2-phase input.<br>Max. input frequency: 300 KHz                                                                                                                                                                                                            |
|                                                                                                                 |           | U1, /U1, V1, /V1, W1, /W1     | Encoder input signal                                                                                                                                                                                                                                                                                        |
|                                                                                                                 | PG2       | A2, /A2, B2, /B2              | Pulse input signal<br>Open collector input: +5 V/+24 V (Note1)<br>1-phase or 2-phase input; Max. input frequency: 300 KHz                                                                                                                                                                                   |
|                                                                                                                 | PG OUT    | AO, /AO, BO, /BO, ZO, /ZO, SG | PG card output signals.<br>Division frequency function: 1 ~ 255 times<br>Max. output voltage for Line driver: 5 V <sub>DC</sub><br>Max. output current: 50 mA<br>Max. output frequency: 300 KHz<br>SG: The GND of PG card is the same as the host controller or PLC, so a common output signal is attained. |

Note 1: For the Open Collector, set input voltage to 5 ~ 15 mA and install a pull-up resistor

[5 V] Recommend pull-up resistor: 100 ~ 220  $\Omega$ , 1/2 W and above

[12 V] Recommend pull-up resistor: 510 ~ 1.35 K $\Omega$ , 1/2 W and above

[24 V] Recommend pull-up resistor: 1.8 K ~ 3.3 K $\Omega$ , 1/2 W and above

## ▪ EMC-D42A

| <br>I/O Extension Card | Terminals   | Description                                                                                                                                                                                                                                                                                                                                                                      |
|-----------------------------------------------------------------------------------------------------------|-------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|                                                                                                           | COM         | Common for multi-function input terminals<br>Select SINK (NPN)/SOURCE (PNP) in J1 jumper/external power supply                                                                                                                                                                                                                                                                   |
|                                                                                                           | MI10 ~ MI13 | Refer to Pr. 02-26 ~ Pr. 02-29 to program the multi-function inputs MI10 ~ MI13.<br>Internal power is applied from terminal E24: +24 V <sub>DC</sub> $\pm$ 5% 200 mA, 5 W<br>External power +24 V <sub>DC</sub> : max. voltage 30 V <sub>DC</sub> , min. voltage 19 V <sub>DC</sub> , 30 W<br>ON: the activation current is 6.5 mA; OFF: leakage current tolerance is 10 $\mu$ A |
|                                                                                                           | MO10 ~ MO11 | Multi-function output terminals (photocoupler)<br>Duty-cycle: 50%; Max. output frequency: 100 Hz<br>Max. current: 50 mA; Max. voltage: 48 V <sub>DC</sub>                                                                                                                                                                                                                        |
|                                                                                                           | MXM         | Common for multi-function output terminals MO10, MO11 (photocoupler)<br>Max 48 V <sub>DC</sub> 50 mA                                                                                                                                                                                                                                                                             |

## ▪ EMC-D611A

| <br>I/O Extension Card | Terminals   | Description                                                                                                                                                                                                                    |
|-----------------------------------------------------------------------------------------------------------|-------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|                                                                                                           | AC          | AC power common for multi-function input terminal (Neutral)                                                                                                                                                                    |
|                                                                                                           | MI10 ~ MI15 | Refer to Pr. 02-26 ~ Pr. 02-31 for multi-function input selection<br>Input voltage: 100 ~ 130 V <sub>AC</sub> ; Input frequency: 57 ~ 63 Hz<br>Input impedance: 27 K $\Omega$<br>Terminal response time: ON: 10 ms; OFF: 20 ms |

## ■ EMC-R6AA

|                                                                                                                   | Terminals                          | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
|-------------------------------------------------------------------------------------------------------------------|------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|  <p>Relay<br/>Extension Card</p> | <p>RA10 ~ RA15<br/>RC10 ~ RC15</p> | <p>Refer to Pr. 02-36 ~ Pr. 02-41 for multi-function output selection</p> <p>Resistive load:<br/>           3A (N.O.) / 250 V<sub>AC</sub><br/>           5A (N.O.) / 30 V<sub>DC</sub><br/>           Inductive load (COS 0.4)<br/>           2.0A (N.O.) / 250 V<sub>AC</sub><br/>           2.0A (N.O.) / 30 V<sub>DC</sub></p> <p>It is used to output each monitor signal, such as for drive in operation, frequency attained or overload indication.</p> |


## ■ EMC-A22A

|                                                                                                                          | Terminals              | Description                                                                                                                                                                                                                                                                                                      |
|--------------------------------------------------------------------------------------------------------------------------|------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|  <p>Analog I/O<br/>extension card</p> | <p>AVI10<br/>AVI11</p> | <p>Refer to Pr. 14-00 ~ Pr. 14-01 for function selection (input), and Pr. 14-18 ~ Pr. 14-19 for mode selection.</p> <p>There are two sets of AVI port, SSW3(AVI10) and SSW4(AVI11), which can be switched to AVI or ACI.</p> <p>AVI: Input 0 ~ 10V<br/>           ACI: Input 0 ~ 20mA / 4 ~ 20mA</p>             |
|                                                                                                                          | <p>AFM10<br/>AFM11</p> | <p>Refer to Pr. 14-12 ~ Pr. 14-13 for function selection (output), and Pr. 14-36 ~ Pr. 14-37 for mode selection.</p> <p>There are two sets of AFM port, SSW1(AFM10) and SSW2(AFM11), which can be switched to AVO or ACO.</p> <p>AVO: Output 0 ~ 10.00V<br/>           ACO: Output 0 ~ 20.0mA / 4.0 ~ 20.0mA</p> |
|                                                                                                                          | <p>ACM</p>             | <p>Analog signal common terminal</p>                                                                                                                                                                                                                                                                             |

## ■ EMC-BPS01

|                                                                                                                     | Terminals      | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
|---------------------------------------------------------------------------------------------------------------------|----------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|  <p>24V Power<br/>Shift Card</p> | <p>24V GND</p> | <p>When the AC motor drive power is off, the external power supply card provides external power to the network system, PLC function, and other functions to allow continued operations.</p> <p>Input power: 24 V<sub>DC</sub> ±5%<br/>           Maximum input current: 0.5A</p> <p>Note:<br/>           Do not connect the control terminal +24V (Digital control signal common: SOURCE) directly to the EMC-BPS01 input terminal 24V.<br/>           Do not connect control terminal GND directly to the EMC-BPS01 input terminal GND.</p> |

## ▪ CMC-EIP01



Network Interface

### Features

- ▶ Support EtherNet/IP and MODBUS TCP protocol
- ▶ User-defined parameter mapping
- ▶ IP Filter, basic firewall function

### Network Interface

|                     |                            |                    |                                                                |
|---------------------|----------------------------|--------------------|----------------------------------------------------------------|
| Interface           | RJ-45 with Auto MDI/MDIX   | Transmission speed | 10/100Mbps Auto-Detect                                         |
| Number of ports     | 1 Port                     | Network protocol   | ICMP, IP, TCP, UDP, DHCP, BOOTP, SMTP, EtherNet/IP, Modbus TCP |
| Transmission method | IEEE 802.3, IEEE 802.3u    |                    |                                                                |
| Transmission cable  | Category 5e shielding 100M |                    |                                                                |

## ▪ CMC-EC01

**NEW**



### Features

- ▶ Supports EthernetCAT protocol
- ▶ Supports standard CiA402 speed mode
- ▶ Supports SDO (Service Data Objects) function:
  - To write motor drive parameters
  - To read motor drive information
- ▶ Auto shutdown function for interruptions during data transmission

### Network Interface

|                     |                            |                    |          |
|---------------------|----------------------------|--------------------|----------|
| Interface           | RJ-45                      | Transmission speed | 100Mbps  |
| Number of ports     | 2 Ports                    | Network protocol   | EtherCAT |
| Transmission method | IEEE 802.3, IEEE 802.3u    |                    |          |
| Transmission cable  | Category 5e shielding 100M |                    |          |

## ▪ CMC-PN01

**NEW**



### Features

- ▶ Supports PROFINET IO device
- ▶ Supports synchronous data transmission and synchronous parameter access
- ▶ Provides GSDML file for PROFINET communication

### Network Interface

|                     |            |                    |                            |
|---------------------|------------|--------------------|----------------------------|
| Interface           | RJ-45      | Transmission Cable | Category 5e shielding 100M |
| Number of Ports     | 2 Ports    | Transmission Speed | 10/100 Mbps auto-negotiate |
| Transmission Method | IEEE 802.3 | Network Protocol   | PROFINET                   |

## ■ CMC-PD01



### Features

- ▶ Supports PROFIBUS DP protocol
- ▶ Supports PZD control data exchange
- ▶ Supports PKW polling AC motor drive parameters
- ▶ Supports user diagnosis function
- ▶ Auto-detects baud rates; supports Max. 12Mbps

### PROFIBUS DP Connector

|                      |                             |
|----------------------|-----------------------------|
| Interface            | DB9 connector               |
| Transmission method  | High-speed RS-485           |
| Transmission cable   | Shielded twisted pair cable |
| Electrical isolation | 500 V <sub>DC</sub>         |

### Communication

|                                                      |                                                                                                                                |
|------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------|
| Message type                                         | Cyclic data exchange                                                                                                           |
| Module name                                          | CMC-PD01                                                                                                                       |
| GSD document                                         | DELA08DB.GSD                                                                                                                   |
| Company ID                                           | 08DB (HEX)                                                                                                                     |
| Serial transmission speed supported (auto-detection) | 9.6 kbps; 19.2 kbps; 93.75 kbps; 187.5 kbps; 125 kbps; 250 kbps; 500 kbps; 1.5 Mbps; 3 Mbps; 6 Mbps; 12 Mbps (bits per second) |

## ■ CMC-DN01



### Features

- ▶ Supports all baud rates on DeviceNet bus: 125 kbps, 250 kbps, 500 kbps and extendable serial transmission speed mode
- ▶ Based on the high-speed communication interface of Delta HSSP protocol, able to conduct immediate control of an AC motor drive
- ▶ Supports Group 2 only connection and polling I/O data exchange
- ▶ For I/O mapping, supports Max. 32 words of input and 32 words of output
- ▶ Supports EDS file configuration in DeviceNet configuration software
- ▶ Node address and serial transmission speed can be set up on AC motor drive
- ▶ Power supplied from AC motor drive

### DeviceNet Connector

|                     |                                                                            |
|---------------------|----------------------------------------------------------------------------|
| Interface           | 5-Pin 5.08mm pluggable connector                                           |
| Transmission method | CAN                                                                        |
| Transmission cable  | Shielded twisted pair cable (with 2 power cables)                          |
| Transmission speed  | 125 kbps, 250 kbps, 500 kbps and extendable serial transmission speed mode |
| Network protocol    | DeviceNet protocol                                                         |



### DeviceNet Connector

|                        |                                                                                          |
|------------------------|------------------------------------------------------------------------------------------|
| Interface              | 50 PIN communication terminal                                                            |
| Transmission method    | SPI communication                                                                        |
| Terminal function      | 1. Communicating with AC motor drive<br>2. Transmitting power supply from AC motor drive |
| Communication protocol | Delta HSSP protocol                                                                      |

## ■ EMC-COP01

Built-in EMC-COP01 card are available for VFDXXC23E and VFDXXC43E

### RJ-45 Pin definition




| Pin | Pin name | Definition                     |
|-----|----------|--------------------------------|
| 1   | CAN_H    | CAN_H bus line (dominant high) |
| 2   | CAN_L    | CAN_L bus line (dominant low)  |
| 3   | CAN_GND  | Ground/0V/V-                   |
| 6   | CAN_GND  | Ground/0V/V-                   |

## Accessories

### Delta Standard Fieldbus Cables

| Delta Cables          | Part Number   | Description                                                 | Length     |
|-----------------------|---------------|-------------------------------------------------------------|------------|
| CANopen Cable         | UC-CMC003-01A | CANopen cable, RJ45 connector                               | 0.3m       |
|                       | UC-CMC005-01A | CANopen cable, RJ45 connector                               | 0.5m       |
|                       | UC-CMC010-01A | CANopen cable, RJ45 connector                               | 1m         |
|                       | UC-CMC015-01A | CANopen cable, RJ45 connector                               | 1.5m       |
|                       | UC-CMC020-01A | CANopen cable, RJ45 connector                               | 2m         |
|                       | UC-CMC030-01A | CANopen cable, RJ45 connector                               | 3m         |
|                       | UC-CMC050-01A | CANopen cable, RJ45 connector                               | 5m         |
|                       | UC-CMC100-01A | CANopen cable, RJ45 connector                               | 10m        |
|                       | UC-CMC200-01A | CANopen cable, RJ45 connector                               | 20m        |
| DeviceNet Cable       | UC-DN01Z-01A  | DeviceNet cable                                             | 305m       |
|                       | UC-DN01Z-02A  | DeviceNet cable                                             | 305m       |
| EtherNet Cable        | UC-EMC003-02A | EtherNet/EtherCAT cable, Shielding                          | 0.3m       |
|                       | UC-EMC005-02A | EtherNet/EtherCAT cable, Shielding                          | 0.5m       |
|                       | UC-EMC010-02A | EtherNet/EtherCAT cable, Shielding                          | 1m         |
|                       | UC-EMC020-02A | EtherNet/EtherCAT cable, Shielding                          | 2m         |
|                       | UC-EMC050-02A | EtherNet/EtherCAT cable, Shielding                          | 5m         |
|                       | UC-EMC100-02A | EtherNet/EtherCAT cable, Shielding                          | 10m        |
|                       | UC-EMC200-02A | EtherNet/EtherCAT cable, Shielding                          | 20m        |
| CANopen/DeviceNet TAP | TAP-CN01      | 1 in 2 out, built-in 121Ω terminal resistor                 | 1 in 2 out |
|                       | TAP-CN02      | 1 in 4 out, built-in 121Ω terminal resistor                 | 1 in 4 out |
|                       | TAP-CN03      | 1 in 4 out, RJ45 connector, built-in 121Ω terminal resistor | 1 in 4 out |
| PROFIBUS Cable        | UC-PF01Z-01A  | PROFIBUS DP cable                                           | 305m       |

Unit: mm

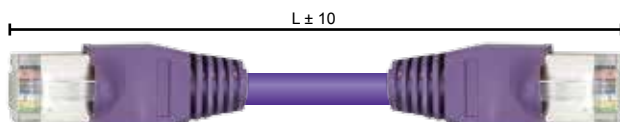

### CANopen Breakout Box


Model: TAP-CN03

Unit: mm [inch]



## Model Name


### ▪ 230 V / 460 V:

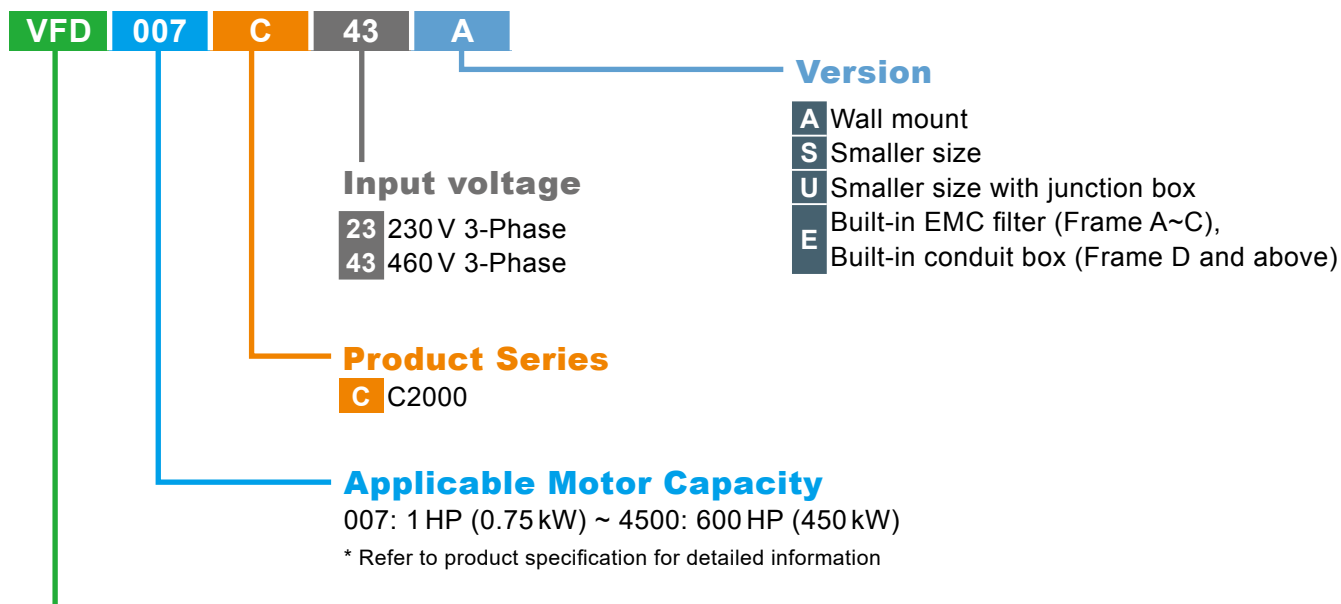

### Series Name

Variable Frequency Drive

### ▪ 575 V / 690 V:

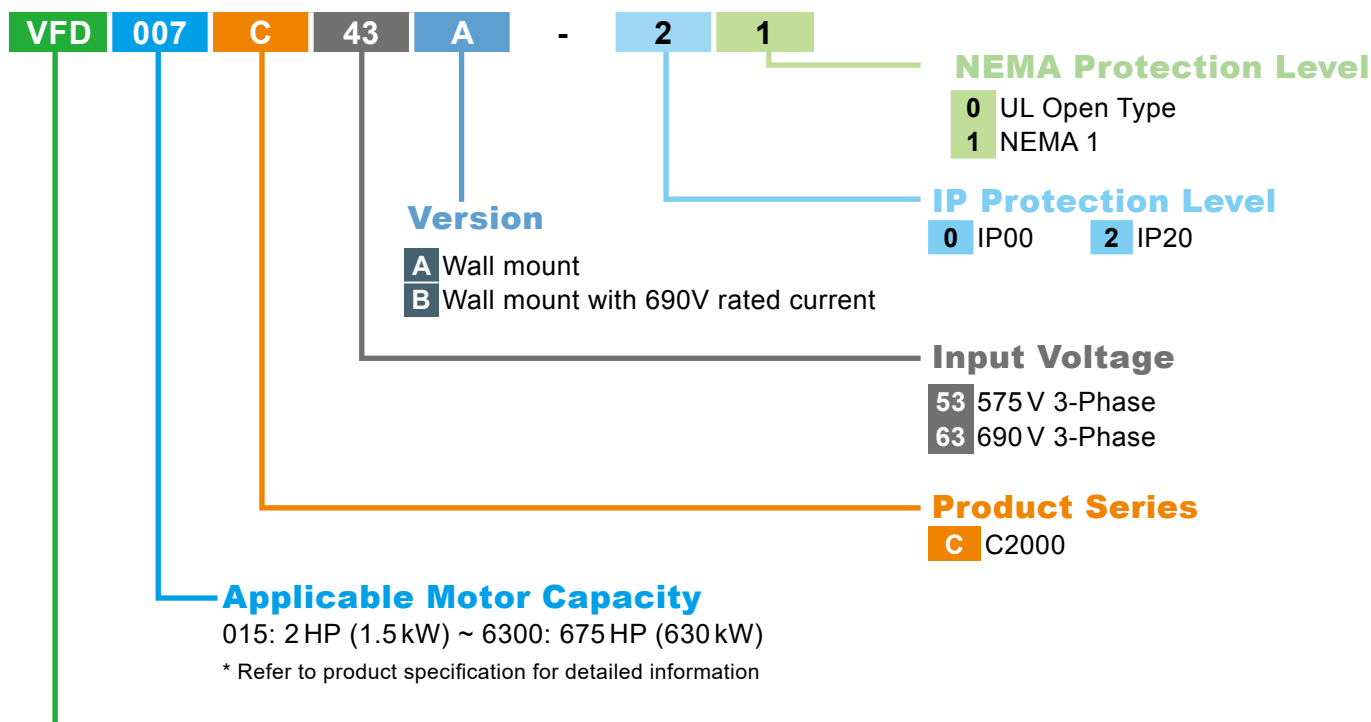

### Series Name

Variable Frequency Drive

## Ordering Information

| Frame Size |                                                                                     | Power Range           | Models                                                                                                                                                       |                                                                                                                                                              |                                                                                                           |                                                                  |
|------------|-------------------------------------------------------------------------------------|-----------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------|------------------------------------------------------------------|
| Frame A    |    | 230 V:<br>0.75~3.7 kW | VFD007C23A<br>VFD015C23A<br>VFD022C23A<br>VFD037C23A                                                                                                         | VFD007C43A<br>VFD015C43A<br>VFD022C43A<br>VFD037C43A<br>VFD040C43A<br>VFD055C43A                                                                             | VFD007C43E<br>VFD015C43E<br>VFD022C43E<br>VFD037C43E<br>VFD040C43E<br>VFD055C43E                          | VFD015C53A-21<br>VFD022C53A-21<br>VFD037C53A-21                  |
|            |                                                                                     | 460 V:<br>0.75~5.5 kW |                                                                                                                                                              |                                                                                                                                                              |                                                                                                           |                                                                  |
| Frame B    |    | 230 V:<br>5.5~11 kW   | VFD055C23A<br>VFD075C23A<br>VFD110C23A                                                                                                                       | VFD075C43A<br>VFD110C43A<br>VFD150C43A                                                                                                                       | VFD075C43E<br>VFD110C43E<br>VFD150C43E                                                                    | VFD055C53A-21<br>VFD075C53A-21<br>VFD110C53A-21<br>VFD150C53A-21 |
|            |                                                                                     | 460 V:<br>7.5~15 kW   |                                                                                                                                                              |                                                                                                                                                              |                                                                                                           |                                                                  |
| Frame C    |   | 230 V:<br>15~22 kW    | VFD150C23A<br>VFD185C23A<br>VFD220C23A                                                                                                                       | VFD185C43A<br>VFD220C43A<br>VFD300C43A                                                                                                                       | VFD185C43E<br>VFD220C43E<br>VFD300C43E                                                                    | VFD185C63B-21<br>VFD220C63B-21<br>VFD300C63B-21<br>VFD370C63B-21 |
|            |                                                                                     | 460 V:<br>18.5~30 kW  |                                                                                                                                                              |                                                                                                                                                              |                                                                                                           |                                                                  |
| Frame D    |  | 230 V:<br>30~37 kW    | <b>Frame_D1</b><br>VFD300C23A<br>VFD370C23A<br>VFD550C43A<br>VFD750C43A<br>VFD450C63B-00<br>VFD550C63B-00                                                    | <b>Frame_D0-1</b><br>VFD370C43S<br>VFD450C43S                                                                                                                | <b>Frame_D2</b><br>VFD300C23E<br>VFD370C23E<br>VFD550C43E<br>VFD750C43E<br>VFD450C63B-21<br>VFD550C63B-21 | <b>Frame_D0-2</b><br>VFD370C43U<br>VFD450C43U                    |
|            |                                                                                     | 460 V:<br>37~75 kW    |                                                                                                                                                              |                                                                                                                                                              |                                                                                                           |                                                                  |
| Frame E    |  | 230 V:<br>45~75 kW    | <b>Frame_E1</b><br>VFD450C23A<br>VFD550C23A<br>VFD750C23A<br>VFD900C43A<br>VFD1100C43A<br>VFD750C63B-00<br>VFD900C63B-00<br>VFD1100C63B-00<br>VFD1320C63B-00 | <b>Frame_E2</b><br>VFD450C23E<br>VFD550C23E<br>VFD750C23E<br>VFD900C43E<br>VFD1100C43E<br>VFD750C63B-21<br>VFD900C63B-21<br>VFD1100C63B-21<br>VFD1320C63B-21 |                                                                                                           |                                                                  |
|            |                                                                                     | 460 V:<br>90~110 kW   |                                                                                                                                                              |                                                                                                                                                              |                                                                                                           |                                                                  |
| Frame F    |  | 230 V:<br>90 kW       | <b>Frame_F1</b><br>VFD900C 23A<br>VFD1320C 43A<br>VFD1600C 43A<br>VFD1600C63B-00<br>VFD2000C63B-00                                                           | <b>Frame_F2</b><br>VFD900C 23E<br>VFD1320C 43E<br>VFD1600C 43E<br>VFD1600C63B-21<br>VFD2000C63B-21                                                           |                                                                                                           |                                                                  |
|            |                                                                                     | 460 V:<br>132~160 kW  |                                                                                                                                                              |                                                                                                                                                              |                                                                                                           |                                                                  |
| Frame F    |  | 690 V:<br>160~200 kW  |                                                                                                                                                              |                                                                                                                                                              |                                                                                                           |                                                                  |
|            |                                                                                     |                       |                                                                                                                                                              |                                                                                                                                                              |                                                                                                           |                                                                  |

| Frame Size               |                                                                                     | Power Range            | Models                                                                                  |                                                                                         |                                                                             |
|--------------------------|-------------------------------------------------------------------------------------|------------------------|-----------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------|-----------------------------------------------------------------------------|
| Frame G                  |    | 460 V:<br>185 ~ 220 kW | <b>Frame_G1</b><br>VFD1850C43A<br>VFD2200C43A<br>VFD2500C63B-00<br>VFD3150C63B-00       | <b>Frame_G2</b><br>VFD1850C43E<br>VFD2200C43E<br>VFD2500C63B-21<br>VFD3150C63B-21       |                                                                             |
|                          |                                                                                     | 690 V:<br>250 ~ 315 kW |                                                                                         |                                                                                         |                                                                             |
| Frame H                  |    | 460 V:<br>280 ~ 450 kW | <b>Frame_H1</b><br>VFD2800C43A<br>VFD3150C43A<br>VFD3550C43A<br>VFD4500C43A             | <b>Frame_H2</b><br>VFD2800C43E-1<br>VFD3150C43E-1<br>VFD3550C43E-1<br>VFD4500C43E-1     | <b>Frame_H3</b><br>VFD2800C43E<br>VFD3150C43E<br>VFD3550C43E<br>VFD4500C43E |
|                          |                                                                                     |                        |                                                                                         |                                                                                         |                                                                             |
| Frame H<br>(690 V Model) |  | 690 V:<br>400 ~ 630 kW | <b>Frame_H1</b><br>VFD4000C63B-00<br>VFD4500C63B-00<br>VFD5600C63B-00<br>VFD6300C63B-00 | <b>Frame_H2</b><br>VFD4000C63B-21<br>VFD4500C63B-21<br>VFD5600C63B-21<br>VFD6300C63B-21 |                                                                             |



## Global Operations

## ASIA (Taiwan)



**Taoyuan  
Technology Center  
(Green Building)**



## Taoyuan Plant 1



**Tainan Plant  
(Diamond-rated Green Building)**



### Wujiang Plant 3



## Shanghai Office

## ASIA (China)



## ASIA (Japan)



Tokyo Office

## ASIA (India)



Rudrapur Plant  
(Green Building)

## EUROPE




Amsterdam, the Netherlands

## AMERICA



Research Triangle Park, U.S.A.

▲ 6 Factories ■ 117 Branch Offices ● 13 R&D Centers ■ 915 Distributors

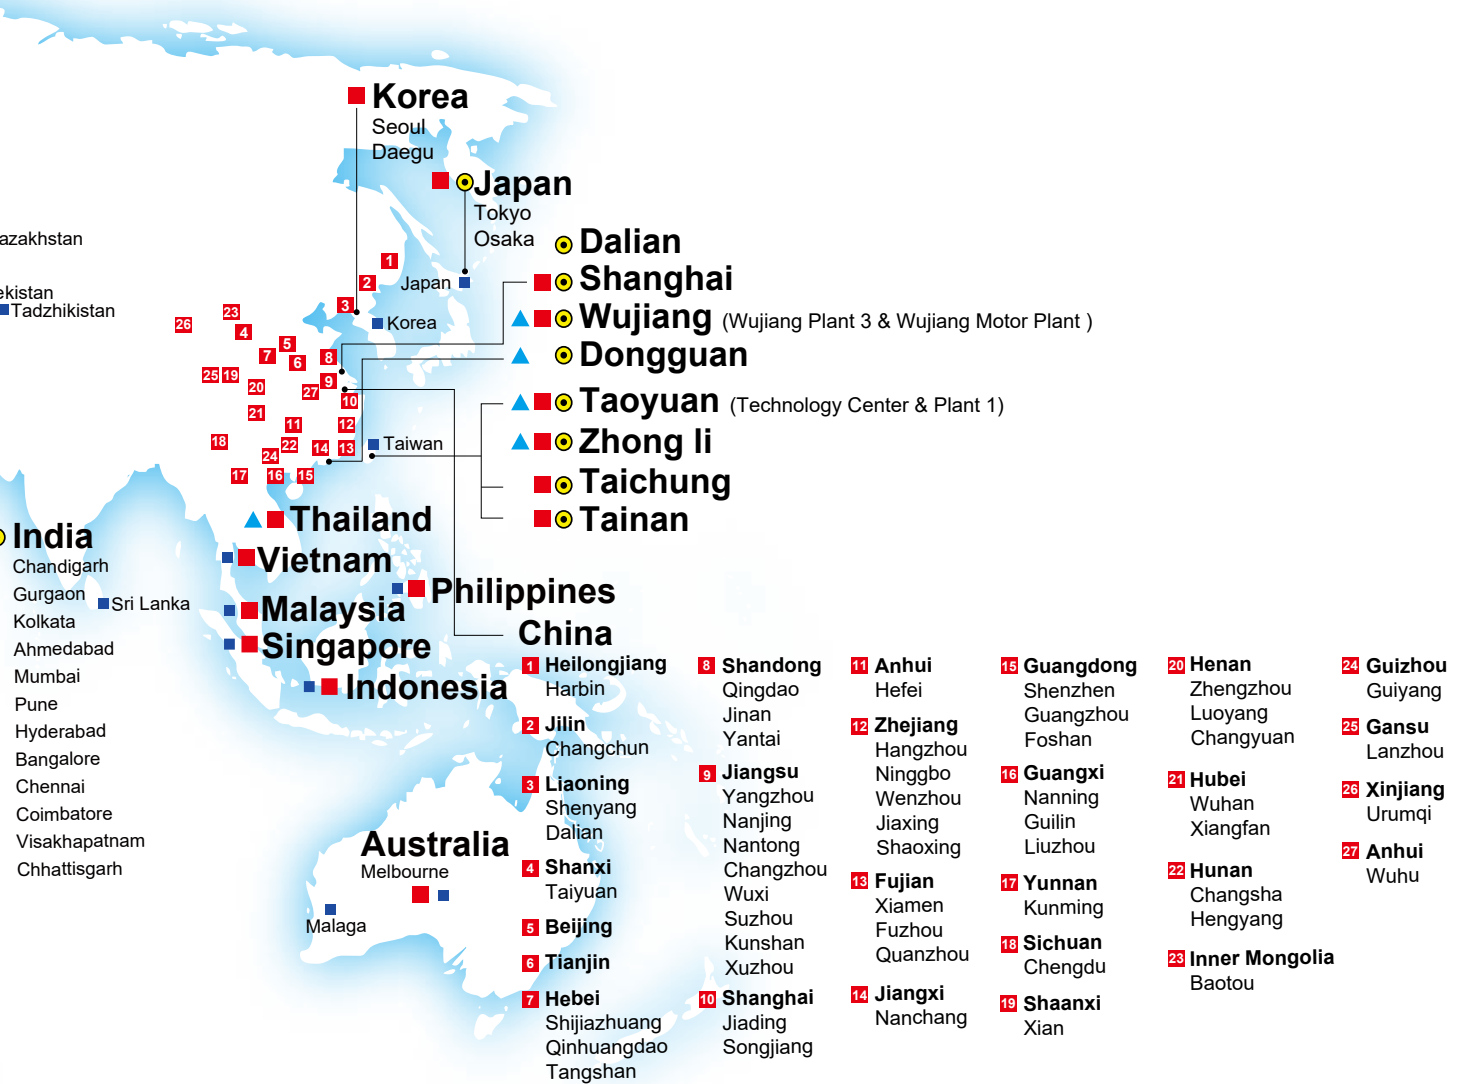



Smarter. Greener. Together.

## Industrial Automation Headquarters

### Delta Electronics, Inc.

Taoyuan Technology Center  
No.18, Xinglong Rd., Taoyuan District,  
Taoyuan City 33068, Taiwan  
TEL: 886-3-362-6301 / FAX: 886-3-371-6301

## Asia

### Delta Electronics (Shanghai) Co., Ltd.

No.182 Minyu Rd., Pudong Shanghai, P.R.C.  
Post code : 201209  
TEL: 86-21-6872-3988 / FAX: 86-21-6872-3996  
Customer Service: 400-820-9595

### Delta Electronics (Japan), Inc.

Tokyo Office  
Industrial Automation Sales Department  
2-1-14 Shibadaimon, Minato-ku  
Tokyo, Japan 105-0012  
TEL: 81-3-5733-1155 / FAX: 81-3-5733-1255

### Delta Electronics (Korea), Inc.

Seoul Office  
1511, 219, Gasan Digital 1-Ro., Geumcheon-gu,  
Seoul, 08501 South Korea  
TEL: 82-2-515-5305 / FAX: 82-2-515-5302

### Delta Energy Systems (Singapore) Pte Ltd.

4 Kaki Bukit Avenue 1, #05-04, Singapore 417939  
TEL: 65-6747-5155 / FAX: 65-6744-9228

### Delta Electronics (India) Pvt. Ltd.

Plot No.43, Sector 35, HSIIDC Gurgaon,  
PIN 122001, Haryana, India  
TEL: 91-124-4874900 / FAX : 91-124-4874945

### Delta Electronics (Thailand) PCL.

909 Soi 9, Moo 4, Bangpoo Industrial Estate (E.P.Z),  
Pattana 1 Rd., T.Phraksa, A.Muang,  
Samutprakarn 10280, Thailand  
TEL: 66-2709-2800 / FAX : 662-709-2827

### Delta Electronics (Australia) Pty Ltd.

Unit 20-21/45 Normanby Rd., Notting Hill Vic 3168, Australia  
TEL: 61-3-9543-3720

## Americas

### Delta Electronics (Americas) Ltd.

Raleigh Office  
P.O. Box 12173, 5101 Davis Drive,  
Research Triangle Park, NC 27709, U.S.A.  
TEL: 1-919-767-3813 / FAX: 1-919-767-3969

### Delta Electronics Brazil

São Paulo Sales Office  
Rua Itapeva, 26 - 3º, andar Edifício Itapeva,  
One - Bela Vista 01332-000 - São Paulo - SP - Brazil  
TEL: 55-12-3932-2300 / FAX: 55-12-3932-237

### Delta Electronics International Mexico S.A. de C.V.

Mexico Office  
Gustavo Baz No. 309 Edificio E PB 103  
Colonia La Loma, CP 54060  
Tlalnepantla, Estado de México  
TEL: 52-55-3603-9200



☎ :051-37133855-6

☎ :09014284236

WWW.ARCOKALIA.COM

## EMEA

### Headquarters: Delta Electronics (Netherlands) B.V.

Sales: Sales.IA.EMEA@deltaww.com  
Marketing: Marketing.IA.EMEA@deltaww.com  
Technical Support: iatechnicalsupport@deltaww.com  
Customer Support: Customer-Support@deltaww.com  
Service: Service.IA.emea@deltaww.com  
TEL: +31(0)40 800 3900

### BENELUX: Delta Electronics (Netherlands) B.V.

De Witbogt 20, 5652 AG Eindhoven, The Netherlands  
Mail: Sales.IA.Benelux@deltaww.com  
TEL: +31(0)40 800 3900

### DACH: Delta Electronics (Netherlands) B.V.

Coesterweg 45, D-59494 Soest, Germany  
Mail: Sales.IA.DACH@deltaww.com  
TEL: +49(0)2921 987 0

### France: Delta Electronics (France) S.A.

ZI du bois Challand 2, 15 rue des Pyrénées,  
Lisses, 91090 Evry Cedex, France  
Mail: Sales.IA.FR@deltaww.com  
TEL: +33(0)1 69 77 82 60

### Iberia: Delta Electronics Solutions (Spain) S.L.U

Ctra. De Villaverde a Vallecas, 265 1º Dcha Ed.  
Hormigueras – P.I. de Vallecas 28031 Madrid  
TEL: +34(0)91 223 74 20

Carrer Llacuna 166, 08018 Barcelona, Spain

Mail: Sales.IA.Iberia@deltaww.com

### Italy: Delta Electronics (Italy) S.r.l.

Via Meda 2-22060 Novedrate(CO)  
Piazza Grazioli 18 00186 Roma Italy  
Mail: Sales.IA.Italy@deltaww.com  
TEL: +39 039 8900365

### Russia: Delta Energy System LLC

Vereyskaya Plaza II, office 112 Vereyskaya str.  
17 121357 Moscow Russia  
Mail: Sales.IA.RU@deltaww.com  
TEL: +7 495 644 3240

### Turkey: Delta Greentech Elektronik San. Ltd. Sti. (Turkey)

Şerifali Mah. Hendem Cad. Kule Sok. No:16-A  
34775 Ümraniye – İstanbul  
Mail: Sales.IA.Turkey@deltaww.com  
TEL: + 90 216 499 9910

### GCC: Delta Energy Systems AG (Dubai BR)

P.O. Box 185668, Gate 7, 3rd Floor, Hamarain Centre  
Dubai, United Arab Emirates  
Mail: Sales.IA.MEA@deltaww.com  
TEL: +971(0)4 2690148

### Egypt + North Africa: Delta Electronics

Unit 318, 3rd Floor, Trivium Business Complex, North 90 street,  
New Cairo, Cairo, Egypt  
Mail: Sales.IA.MEA@deltaww.com